

TruFLOW™ Sr. Manifold Basic End Cap

Submittal Information

Revision B: March 12, 2009

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

Material:	UNS C3850 Brass
Maximum Working Pressure:	145 psi
Maximum Temperature/Flow:	220°F (104°C)/21.0 gpm
Connection:	1½" BSP

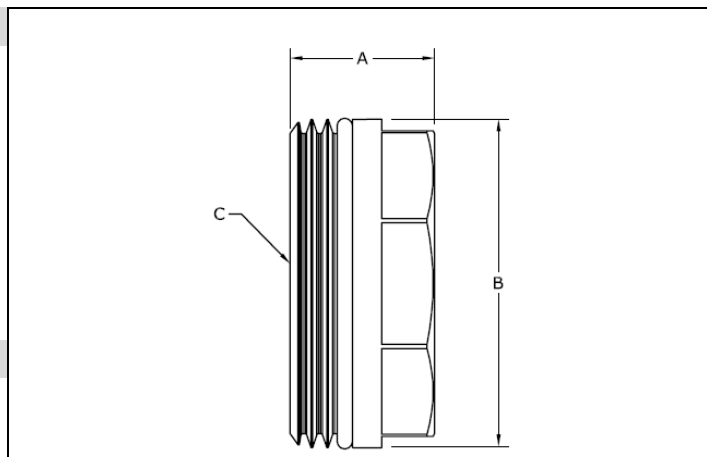

Product Information and Application Use

The TruFLOW™ Sr. Manifold Basic Cap comes with a male 1½" BSP thread to fit directly into the TruFLOW Sr. manifold body.

✓ Description	Part Number	A	B	C	Weight
TruFLOW Sr. Manifold Basic End Cap	A2651251	0.908"	2.047"	1½" BSP	3.0 lbs.

Installation

The TruFLOW Sr. Manifold Basic End Cap adapts directly to the inlet/outlet of the TruFLOW Sr. Manifold. Use Uponor Silicone Oil to aid in the install and removal of the end cap. Accessories: Replacement O-ring for 1" BSP Connections (A2640004); Silicone Oil (A2620007). Refer to the TruFLOW Sr. Manifold Instruction Sheet for additional information.

Standards

ASTM F877

Codes

N/A

Listings

NSF-rfh

Related Applications

Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca