

Stainless-steel Manifold Isolation Valve Body

Submittal Information
Revision A: May 12, 2014

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

Materials:


Axle material (valve body):	Brass CW614N-UNI EN 12164
Axle material (cap):	Acrylonitrile butadiene styrene (ABS) plastic
Spring material (valve body):	Stainless steel
O-ring material (valve body):	EPDM 70SH

Maximum test pressure: 145 psi

Maximum operating temperature/pressure: 158°F (70°C) at 87 psi

Product Information and Application Use

Uponor's Stainless-steel Manifolds all come standard with isolation valves for easy loop isolation. These components are fixed to the return side of the manifold and are used to shut off the flow of water or water/glycol mix through the manifold port.

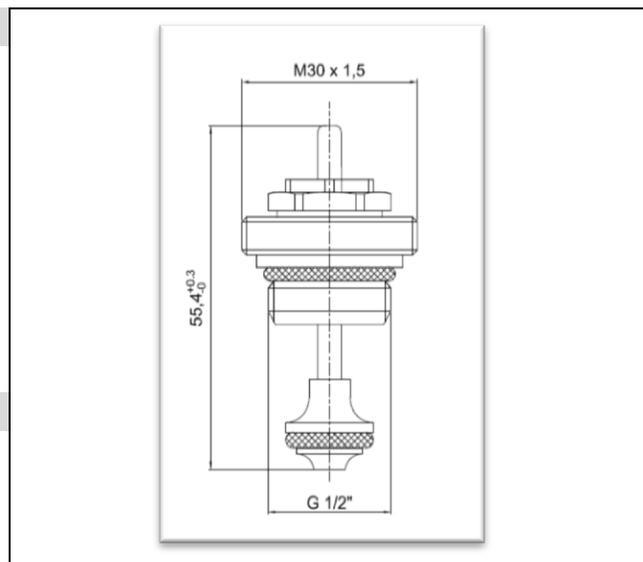

✓ Description	Part Number	Height	Width	Weight
Stainless-steel Manifold Isolation Valve Body, replacement part	A2771030	2.18"	1.18"	0.15 lbs.
Stainless-steel Manifold Isolation Valve Body, O-ring, replacement part	A2771035	0.669"	0.79"	0.001 lbs.

Installation

To operate the isolation valve on the Uponor Stainless-steel Manifold, twist the Stainless-steel Manifold On/Off Valve Plastic Cap clockwise to close and counterclockwise to open. For more information, refer to the Uponor Stainless-steel Manifold Installation Guide.

Standards

N/A

Codes

N/A

Listings

N/A

Related Applications

Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
www.uponorpro.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
www.uponorpro.com