

Isolation Card (24VAC), Single and Triple

Submittal Information

Revision A: July 21, 2010

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data


Voltage: 24VAC

Ambient Conditions: Indoor use only: 32°F to 122°F (0° C to 50°C)

Product Information and Application Use

This low-voltage (24VAC) Isolation Card provides separation or isolation between power-sharing thermostats and the loads they control.

These cards also isolate power variations caused by third-party components.

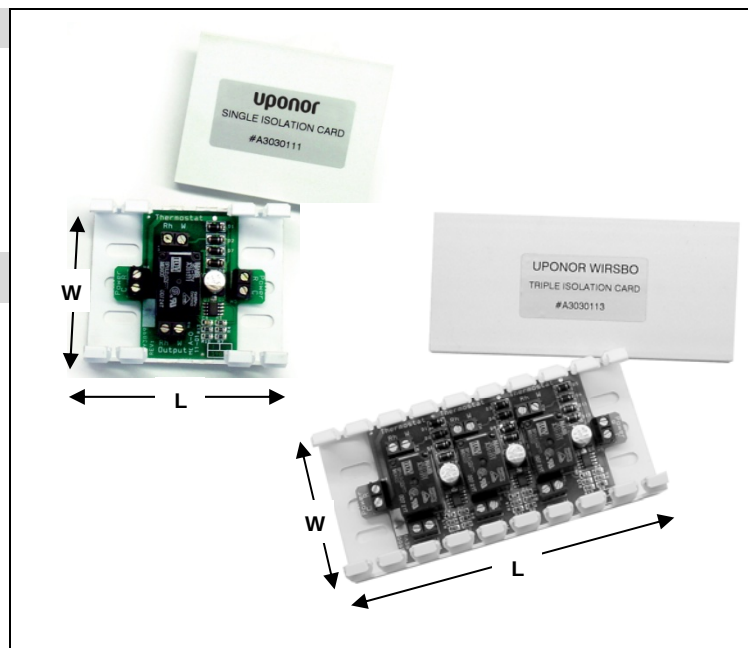

✓	Description	Part Number	Length (L)	Width (W)	Depth	Weight
	Single Isolation Card (24VAC)	A3030111	2.837"	2.255"	1.160"*	0.10 lbs.
	Triple Isolation Card (24VAC)	A3030113	4.850"	2.300"	1.145"*	0.27 lbs.
	*(depth with cover attached)					

Installation

For installation instructions, refer to the Climate Control™ Zoning System Installation Guide.

Standards

CSA

Codes

N/A

Listings

UL

Related Applications

Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca