

Multi-layer Composite (MLC) Press Fitting Brass Reducing Tee

Submittal information

Revision C: August 9, 2016

Project information

Job name:

Location:

Engineer:

Contractor:

Manufacturer's representative:

Part no. ordered:

Date submitted:

Submitted by:

Approved by:


Technical data

Material: CA 360 brass

O-ring: Buna-N (Nitrile)

Product information and application use

Uponor multi-layer composite (MLC) press fitting brass tees make diverting connections for MLC tubing in supply and return mains.

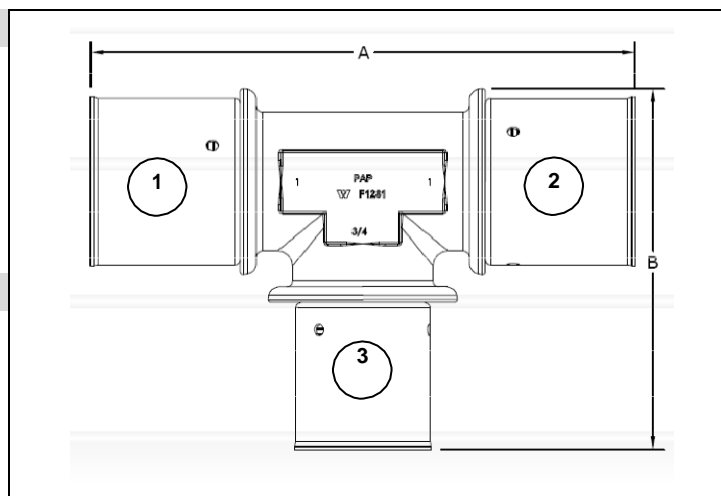

✓ Description	(1)	(2)	(3)	Part number	A	B	Weight
MLC Press Fitting Brass Reducing Tee, ¾" MLC Tubing x ¾" MLC Tubing x ½" MLC Tubing				D4707550	3.92"	2.24"	0.42 lbs.
MLC Press Fitting Brass Reducing Tee, 1" MLC Tubing x 1" MLC Tubing x ½" MLC Tubing				D4701150	4.32"	2.57"	0.57 lbs.
MLC Press Fitting Brass Reducing Tee, 1" MLC Tubing x 1" MLC Tubing x ¾" MLC Tubing				D4701175	4.32"	2.91"	0.70 lbs.

Installation

Mini-press battery tools or MLC press fitting manual tools are required. For more information, refer to the Uponor radiant floor heating installation handbook.

Standards

ASTM F1281

Codes

N/A

Listings

NSF-rfh

Related applications

Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems

Contact information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
www.uponorpro.com

Uponor Ltd.
2000 Argenta Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
www.uponorpro.com