

2" Copper Valveless Manifold

Submittal Information

Revision A: April 22, 2008

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:


Approved By:

Technical Data

Material:	Type L Copper
Maximum Temperature (no pressure):	320°F (160°C)
Maximum Working Temperature/Pressure:	210°F (99°C) at 150 psi
Maximum Flow Rate:	45 gpm

Product Information and Application Use

The Uponor 2" Copper Valveless Manifold is used for hot and cold domestic potable water distribution systems.¹ It can also be used in balanced radiant systems that do not require individual loop control. The manifold features ¾" sweat connections.

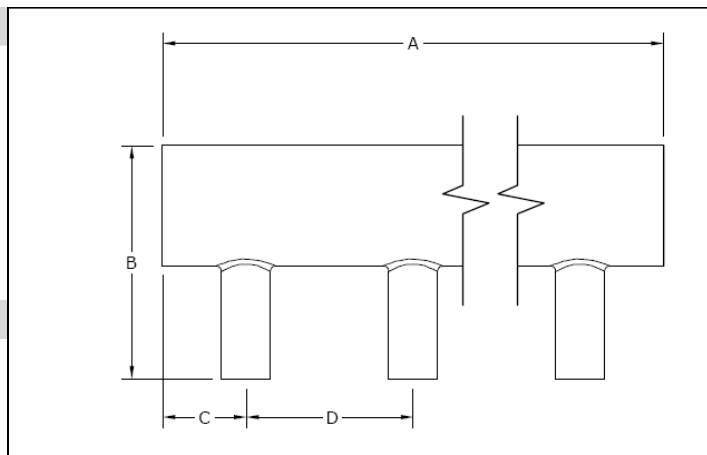

✓ Description	Part Number	A	B	C	D	Weight
2" x 6' Copper Manifold with 24 outlets, ¾" sweat	F2802075	72.00"	4.13"	1.50"	3.00"	12.35 lbs.

Installation

Any product designed to mount 2" copper pipe may be used as a mounting bracket. Any bend within 6 inches of the connection to the manifold requires the use of a Tube Talon (F7050750) or Bend Supports (A5110500 and A5150500). Refer to the AQUAPEX® Professional Plumbing Installation Handbook or Uponor Radiant Installation Handbook for additional information.

Standards

CAN/CSA B137.5; ASTM F877

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

IAPMO; ANSI/NSF 14- and 61-certified

Related Applications

PEX-a Plumbing Systems
Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.