

# Engineered Polymer (EP) Flow-through Vertical Multi-port Tee

Submittal Information

Revision E: Feb. 1, 2016

## Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:


Approved By:

## Technical Data

Material:	Polysulfone GF120
Maximum Temperature (no pressure):	320°F (160°C)
Maximum Working Temperature/Pressure:	210°F at 150 psi (99°C at 10.3 bar)
Maximum Multi-port Tee Flow for 3/4" Inlet:	13.2 gpm at 12 fps 8.8 gpm at 8 fps

## Product Information and Application Use

Engineered Polymer (EP) Flow-through Vertical Multi-port Tee is designed for use in hot and cold domestic potable water distribution systems. The EP Flow-through Vertical Multi-port Tee features 3/4" ProPEX® inlets and 1/2" ProPEX outlets.<sup>1</sup>

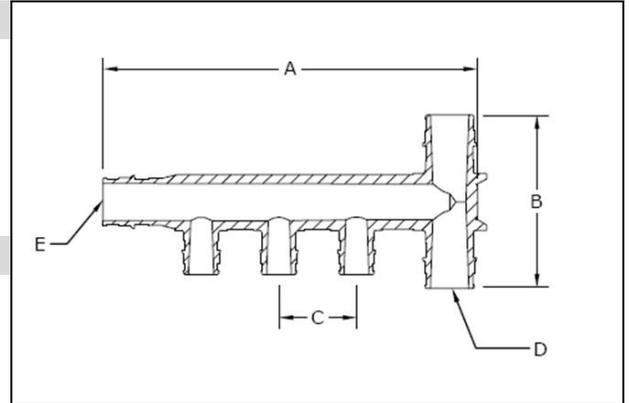

✓ Description	Part Number	A	B	C	D	E	Weight
EP Flow-through Multi-port Vertical Tee, 3 outlets, 3/4" x 3/4" x 3/4" ProPEX	Q2237757	6.03"	2.85"	1.25"	0.75" ProPEX	0.75" ProPEX	0.12 lbs.
EP Flow-through Multi-port Vertical Tee, 4 outlets, 3/4" x 3/4" x 3/4" ProPEX	Q2247757	7.28"	2.85"	1.25"	0.75" ProPEX	0.75" ProPEX	0.16 lbs.

## Installation

Use any product designed to mount 1" copper pipe as a mounting bracket. For more information, refer to the Uponor Professional Plumbing Installation Guide or Uponor Radiant Floor Heating Installation Handbook.

## Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

## Codes

IPC; UPC; NSPC; NPC of Canada

## Listings

ANSI/NSF 14 and 61 certified; ICC ESR 1099; IAPMO 3946; cQAIus P321

## Related Applications

PEX-a Plumbing Systems

## Contact Information

Uponor, Inc.  
5925 148<sup>th</sup> Street West  
Apple Valley, MN 55124 USA  
Phone: 800.321.4739  
Fax: 952.891.1409  
www.uponorpro.com

Uponor Ltd.  
2000 Argentia Rd., Plaza 1, Ste. 200  
Mississauga, ON L5N 1W1 CANADA  
Phone: 888.994.7726  
Fax: 800.638.9517  
www.uponorpro.com

<sup>1</sup>ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.