

2" Copper Valveless Manifold with ProPEX® Connection

Submittal Information
Revision A: Feb. 18, 2008

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

Material:	Type L Copper
Manifold Body Size:	2.0"
Maximum Working Temperature/Pressure:	210°F (99°C) at 150 psi
Maximum Temperature (no pressure):	320°F (160°C)
Maximum Flow:	45 gpm

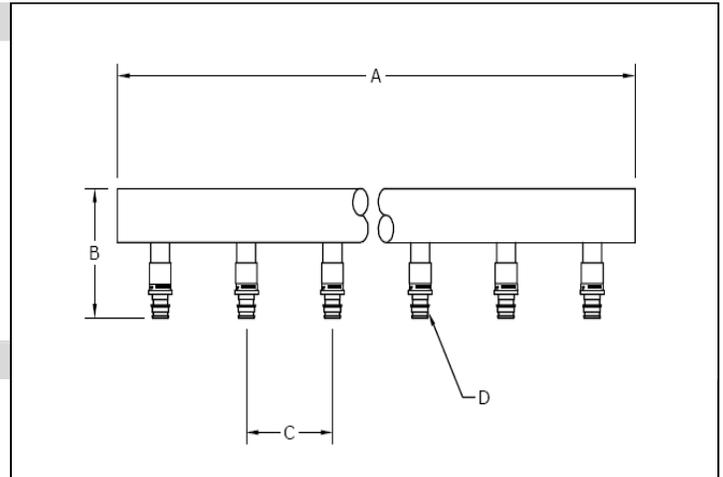

Product Information and Application Use

The 2" Copper Valveless Manifold with ProPEX® Connection is used for radiant heating projects.¹ The manifold has a 2" copper sweat fitting adapter supply connection and ¾" nominal branches. This 12-outlet manifold is preassembled with ⅝" or ¾" ProPEX connections.

✓ Description

2" x 4' CU Manifold with ⅝" ProPEX Connection, 12 outlet
2" x 4' CU Manifold with ¾" ProPEX Connection, 12 outlet

Part Number	A	B	C	D	Weight
Q2831263	48.0"	4.75"	4.0"	⅝"	12.1 lbs.
Q2831275	48.0"	4.75"	4.0"	¾"	12.0 lbs.

Installation

Any product designed to mount 2" copper pipe may be used as a mounting bracket. For more information, refer to the Uponor Radiant Installation Handbook. Accessories: 2" Copper Manifold End Cap (A2402000).

Standards

CSA B137.5; ASTM F877

Codes

N/A

Listings

NSF-rfh; NSF 61-certified

Related Applications

Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.