

ProPEX® Brass Coupling

Submittal Information
Revision C: Oct. 21, 2013

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

Material: CA 360 Brass

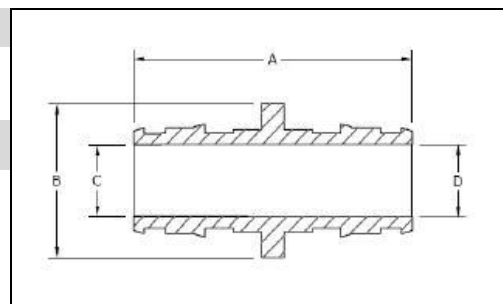

Product Information and Application Use

The Uponor 5/8" ProPEX® Brass Coupling is available for use in hydronic radiant heating and cooling systems. The fitting features ProPEX connections for use with Uponor crosslinked polyethylene (PEX) tubing.

✓ Description	Part Number	A	B	C	D	Weight
ProPEX Brass Coupling, 5/8" PEX x 5/8" PEX	Q4546363	1.86"	0.91"	0.52"	0.52"	0.08 lbs.

Installation

Use a 5/8" ProPEX Ring with Stop (Q4690625) to connect the tubing. Refer to the Uponor ProPEX Connections Instructional Guide for additional information.

Standards

ASTM F877; ASTM F1960; CAN/CSA B137.5

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

ANSI/NSF 14- and 61-certified; *UL 1821; *ULC/ORD C199P; ICC ESR 1099; HUD MR 1269; IAPMO 3558

Related Applications

Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
www.uponorpro.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
www.uponorpro.com

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.