

ProPEX® Brass to Polybutylene (PB) Coupling

Submittal Information

Revision A: Feb. 14, 2008

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

Material: 360 Brass

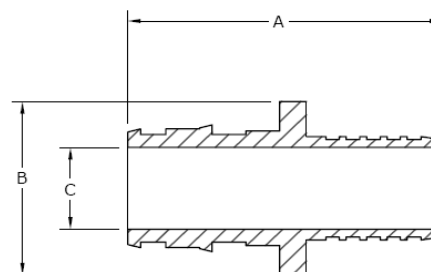

Product Information and Application Use

The ProPEX® Brass to Polybutylene (PB) Coupling transitions polybutylene tubing to Wirsbo AQUAPEX® tubing.¹ Product does not include the crimp ring for the PB side of the coupling. The couplings are available for use in hot and cold domestic potable water systems.

✓ Description

Part Number	A	B	C	Weight
Q4585050	1.47"	0.75"	0.398"	0.20 lbs.
Q4587575	1.76"	1.12"	0.614"	0.40 lbs.

ProPEX Brass to PB Coupling, ½" PEX x ½" PB
ProPEX Brass to PB Coupling, ¾" PEX x ¾" PB

Installation

Use the appropriate Uponor ProPEX Ring for the tubing. Use crimp ring to secure the PE tubing to the fitting. For more information, refer to the AQUAPEX Professional Plumbing Installation Handbook.

Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

IAMPO 3558; ICC ESR 1099; ANSI/NSF 14- and 61-certified

Related Applications

PEX-a Plumbing Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.