

ProPEX® Brass Reducing Tee

Submittal Information

Revision B: March 17, 2009

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:


Approved By:

Technical Data

Material: CA 360 Brass/EN 12165 Brass

Product Information and Application Use

ProPEX® Brass Reducing Tee makes diverting connections for Uponor PEX tubing in supply and return mains.¹ Available for use in hot and cold domestic potable water systems, AQUASAFE® Residential Fire Safety Systems and in any hydronic heating system. Each end of the fitting is manufactured with the ProPEX fitting for connections to hePEX™ or any AquaPEX® tubing. Branch size is listed last in the part description.

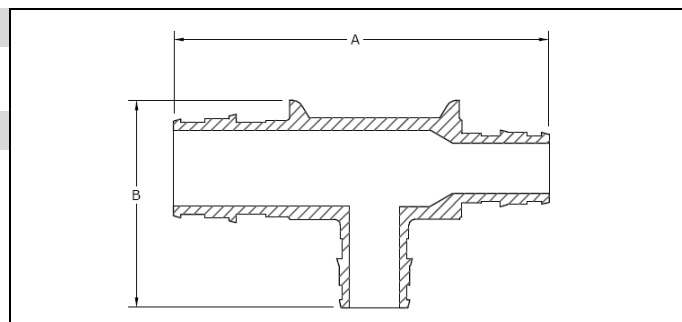

✓	Description	Part Number	A	B	Weight
	ProPEX Brass Reducing Tee, ½" PEX x ½" PEX x ¾" PEX	Q4705575	2.80"	1.93"	0.40 lbs.
	ProPEX Brass Reducing Tee, ¾" PEX x ½" PEX x ½" PEX	Q4707555	3.03"	1.69"	0.40 lbs.
	ProPEX Brass Reducing Tee, ¾" PEX x ½" PEX x ¾" PEX	Q4707557	3.03"	1.93"	0.40 lbs.
	ProPEX Brass Reducing Tee, ¾" PEX x ¾" PEX x ½" PEX	Q4707550	3.27"	1.69"	0.40 lbs.
	ProPEX Brass Reducing Tee, ¾" PEX x ¾" PEX x 1" PEX*	Q4707710	3.62"	2.42"	0.50 lbs.
	ProPEX Brass Reducing Tee, 1" PEX x ¾" PEX x ¾" PEX*	Q4701775	3.86"	2.18"	0.30 lbs.
	ProPEX Brass Reducing Tee, 1" PEX x ¾" PEX x 1" PEX*	Q4701751	3.86"	2.42"	0.40 lbs.
	ProPEX Brass Reducing Tee, 1" PEX x 1" PEX x ½" PEX*	Q4701150	4.09"	1.95"	0.40 lbs.
	ProPEX Brass Reducing Tee, 1" PEX x 1" PEX x ¾" PEX*	Q4701175	4.09"	2.18"	0.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 2" PEX x 1½" PEX	Q4702215	7.43"	3.99"	2.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 2" PEX x 1¼" PEX	Q4702213	7.43"	3.73"	2.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 2" PEX x 1" PEX	Q4702210	7.43"	3.47"	2.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 2" PEX x ¾" PEX	Q4702275	7.43"	3.23"	2.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 1½" PEX x 1½" PEX	Q4702055	6.99"	3.99"	2.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 1½" PEX x 1¼" PEX	Q4702053	6.99"	3.73"	2.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 1½" PEX x 1" PEX	Q4702051	6.99"	3.47"	2.40 lbs.
	ProPEX Brass Reducing Tee, 2" PEX x 1½" PEX x ¾" PEX	Q4702575	6.99"	3.23"	2.40 lbs.

Installation

Use appropriate PEX Ring for connecting the tubing. Refer to the AquaPEX Installation Handbook, the AQUASAFE Installation Guide or the Radiant Floor Installation Handbook for additional information.

Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

IAPMO 3558; ANSI/NSF 14- and 61-certified; HUD MR 1269; ICC ESR 1099; *UL 1821; *ULC/ORD C 199P

Related Applications

PEX-a Plumbing Systems
Radiant Heating and Cooling Systems
AQUASAFE Fire Safety Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.