

TotalFit tees

Project information


|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Date submitted: |
| Contractor:                    | Submitted by:   |
| Manufacturer's representative: | Approved by:    |

Technical data

|                         |                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------|
| Material                | Engineered Polymer                                                                                             |
| Temp/pressure ratings   | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | No                                                                                                             |

Product information and application use

TotalFit™ is the professional-grade engineered polymer (EP) push-to-connect solution that provides greater value for residential projects with the same versatility and speed as brass push-to-connect fittings for PEX, PE-RT, CPVC, and copper piping systems.

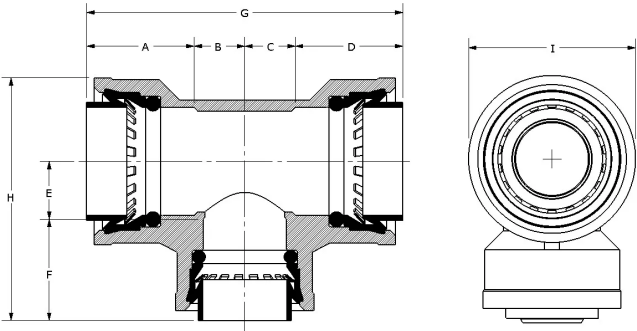

| Part name                       | Part no.  | A<br>[inch] | B<br>[inch] | C<br>[inch] | D<br>[inch] | E<br>[inch] | F<br>[inch] | G<br>[inch] | H<br>[inch] | I<br>[inch] | Weight<br>per UOM<br>[lbs/UOM] |
|---------------------------------|-----------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------------------|
| TotalFit Tee, 1" x 1" x 1       | TF4751010 | 1.134       | 0.657       | 0.657       | 1.134       | 0.657       | 1.134       | 3.583       | 2.671       | 1.76        | 0.18                           |
| TotalFit Tee, 1/2" x 1/2" x 1/2 | TF4755050 | 0.913       | 0.37        | 0.37        | 0.913       | 0.368       | 0.913       | 2.567       | 1.846       | 1.13        | 0.07                           |
| TotalFit Tee, 3/4" x 3/4" x 3/4 | TF4757575 | 1.067       | 0.492       | 0.492       | 1.067       | 0.492       | 1.067       | 3.118       | 2.287       | 1.457       | 0.12                           |

| Part name     | Part no. | Codes                                        | Standards                                     | Listings                |
|---------------|----------|----------------------------------------------|-----------------------------------------------|-------------------------|
| TotalFit tees | All      | UPC IRC IPC NPC of<br>Canada UMC CMC CPC IMC | NSF-372 ASTM F877 NSF-61 NSF-<br>14 ASSE 1061 | K-13573 K-13571 K-13572 |

| Installation                                                                                                                                                                                                                                                                                                                                   | Related applications                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Install on PEX, PE-RT, CPVC, and copper piping systems. Use deburr and depth tool to remove excess material or burrs and mark the appropriate depth on pipe. If using flexible PEX or PE-RT, install the insert inside the pipe first before making the connection. Refer to the Uponor TotalFit Instruction Sheet for additional information. | Plumbing<br>Hydronic Heating & Cooling |

| Footnotes | Contact information                                                                                                                                                                                        |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -         | Uponor Inc.<br>5925 148th Street West<br>Apple Valley, MN 55124<br>T 800.321.4739<br>F 952.891.2008<br><br>Uponor Ltd.<br>6510 Kennedy Road<br>Mississauga, ON L5T 2X4<br>T 888.594.7726<br>F 800.638.9517 |