

Industry Standard Closet Carrier

⚠ WARNING



**THINK
SAFETY
FIRST**

Read this Manual **BEFORE** using this equipment. Failure to read and follow all safety and use information can result in death, serious personal injury, property damage, or damage to the equipment. Keep this Manual for future reference.

Installation Instructions

1. Attach carrier legs to concrete floor with minimum 1/2" dia. anchor bolts (by others).
2. Determine pitch and rough-in requirements (see chart). For carriers set in a low position, break scored steps from lower portion or faceplate with a heavy hammer.
3. Attach faceplate assembly to carrier fitting with 1/2" bolts and washers (supplied). Place oval fitting gasket between faceplate and fitting prior to bolting. Attach the rear anchor support to the boss on the backside of carrier fitting. Anchor the rear support to a concrete floor, using a 1/2" dia. anchor bolt with a minimum pullout strength of 4000 lbs. (by others)
4. Adjust faceplate assembly to accommodate bowl height by loosening side leg bolts. Adjust fitting to accommodate pitch requirement by loosening bolts.
5. Adjust ABS nipple and studs. ABS nipple should extend 5/16" beyond finished wall. Studs should extend 2-1/4" beyond finished wall.
6. Install neoprene bowl gasket on horn in back of bowl, knock out nipple test cap, and set bowl.
7. Install chrome cap nuts and plastic washer over studs. Tighten cap nuts fully to properly load the carrier.

NOTICE


Wall constructor must leave approx. 2" opening around nipple to access compression bolts. Use 30 - 50 in. lbs. of torque to tighten compression bolts.

NOTICE

Consult factory prior to installation with blow-out fixtures.

WATTS®

Installation Diagram

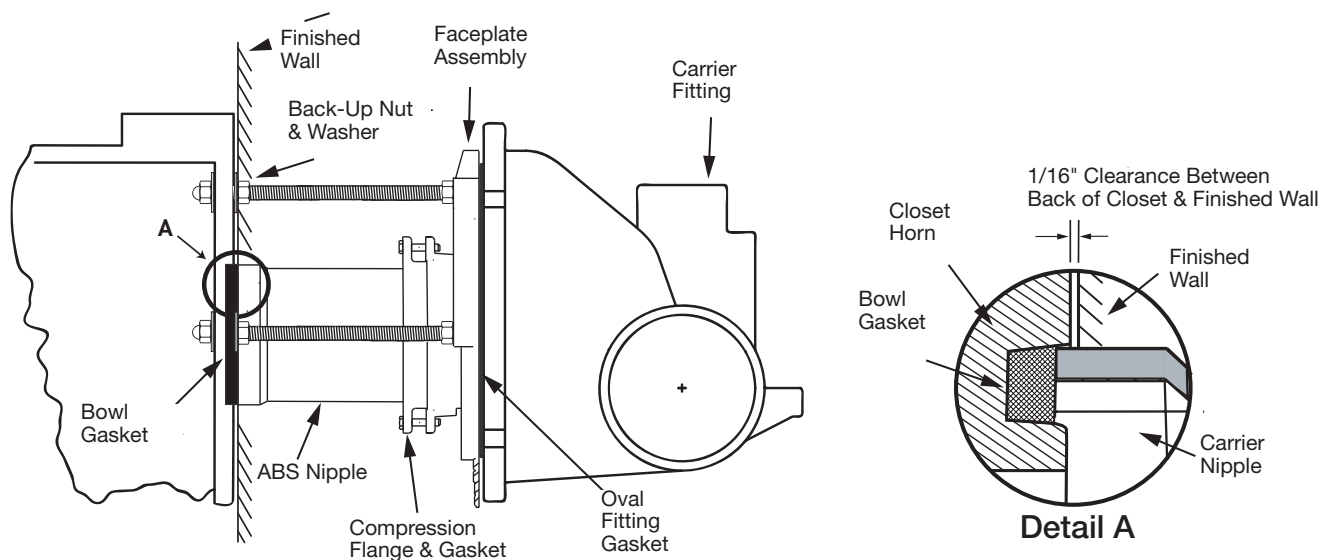

Battery Pitch & Rough-In Requirements

C/L Bowl Outlet From Floor	Min. C/L Horiz. Waste From Floor	Max. C/L Horiz. Waste From Floor
4-1/2"	3"	4-1/2"
5"	3"	5"
5-1/2"	3"	5-1/2"
6"	3"	6"
6-1/2"	3-1/4"	6-1/2"
7"	3-5/8"	7"
7-1/2"	4-1/8"	7-1/2"
8"	4-5/8"	8"
8-1/2"	5"	8-1/2"
9"	5-3/8"	9"
9-3/8"	5-3/4"	9-3/8"

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information: www.watts.com/prop65

Limited Warranty: Watts Regulator Co. (the "Company") warrants each product to be free from defects in material and workmanship under normal usage for a period of one year from the date of original shipment. In the event of such defects within the warranty period, the Company will, at its option, replace or recondition the product without charge.

THE WARRANTY SET FORTH HEREIN IS GIVEN EXPRESSLY AND IS THE ONLY WARRANTY GIVEN BY THE COMPANY WITH RESPECT TO THE PRODUCT. THE COMPANY MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED. THE COMPANY HEREBY SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and the Company shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, or any other circumstances over which the Company has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

Some States do not allow limitations on how long an implied warranty lasts, and some States do not allow the exclusion or limitation of incidental or consequential damages. Therefore the above limitations may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from State to State. You should consult applicable state laws to determine your rights. **SO FAR AS IS CONSISTENT WITH APPLICABLE STATE LAW, ANY IMPLIED WARRANTIES THAT MAY NOT BE DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO ONE YEAR FROM THE DATE OF ORIGINAL SHIPMENT.**



A Watts Water Technologies Company

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com