

# INSTALLATION INSTRUCTIONS



For more information contact...

## WOODFORD MANUFACTURING COMPANY

2121 Waynoka Road, Colorado Springs, Colorado 80915 • Phone: (800) 621-6032 • Fax: (800) 765-4115

To view our complete product line visit: [www.woodfordmfg.com](http://www.woodfordmfg.com) or email: [sales@woodfordmfg.com](mailto:sales@woodfordmfg.com)

A Division of WCM Industries, Inc.

Rev 06/17 Form No. 67HCM.101


## Model HC67 & HCB67 INSTALLATION INSTRUCTIONS FOR HOT AND COLD MIXER

### WARNING:

- Hydrant must be properly installed and operated to insure drainage. Improperly installed or operated hydrants may freeze and burst in freezing weather.
- Access to check valve is recommended since it cannot be serviced through the front of the unit.

### INSTALLATION INSTRUCTIONS:

1. Top edge of head must be level  
AND ...
2. 1/2" tube must slope slightly down toward inlet  
AND ...
3. 3/4" tube must slope slightly down toward head.
4. Install check valves after unit is in wall cutout.
5. Install hot supply line to inlet marked "H" and cold supply line to inlet marked "C".
6. Check completely for leaks and drain capabilities of unit.

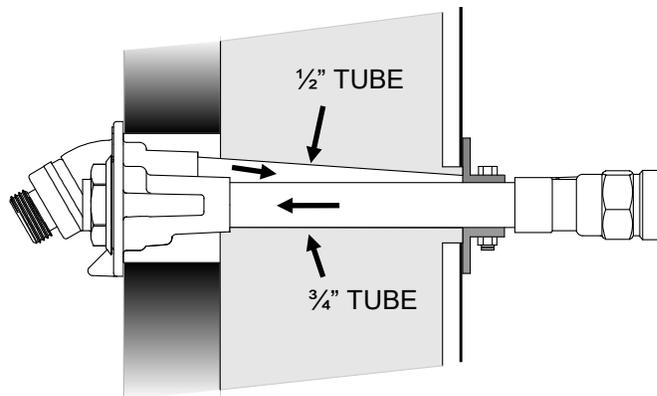

### OPERATION INSTRUCTIONS:

1. To OPEN, turn stem counter-clockwise.
2. To CLOSE and DRAIN, turn stem clockwise until seated and water drains out the drain hole.
3. To adjust water temperature, move pointer on handle to appropriate position.