



**cps** Automotive

# REVOLUTIONARY EASE AND ENDURANCE

Quickly and efficiently **Recover, Recycle and Recharge**  
automotive A/C systems with the FX Series.



**7" COLOR TOUCH  
SCREEN CONTROL PANEL**

**PATENTED OILLESS  
COMPRESSOR**

**PATENTED  
MOTOR-CONTROLLED  
BALL VALVES**

**1-2-5 WARRANTY**

**COMPATIBLE WITH ELECTRIC  
AND TRADITIONAL ENGINE  
DRIVEN COMPRESSORS**



**CPS GLOBAL HEADQUARTERS**

3600 Enterprise Way  
Miramar, FL 33025 U.S.A.

**CPS PRODUCTS CANADA LTD.**

1324 Blundell Road  
Mississauga, ON, L4Y 1M5


**FOR MORE INFORMATION CALL:**

Toll Free: 800.277.3808  
Telephone: 877.776.8486

[cpsproducts.com/fxadvantage/](http://cpsproducts.com/fxadvantage/)

CPS reserves the right to make changes to, or discontinue any product or service identified in this publication without notice. CPS advises its customers to ensure they have obtained the latest and most current version of any relevant information before placing any orders. ©CPS PRODUCTS. ALL RIGHTS RESERVED.

**cps**<sup>®</sup>

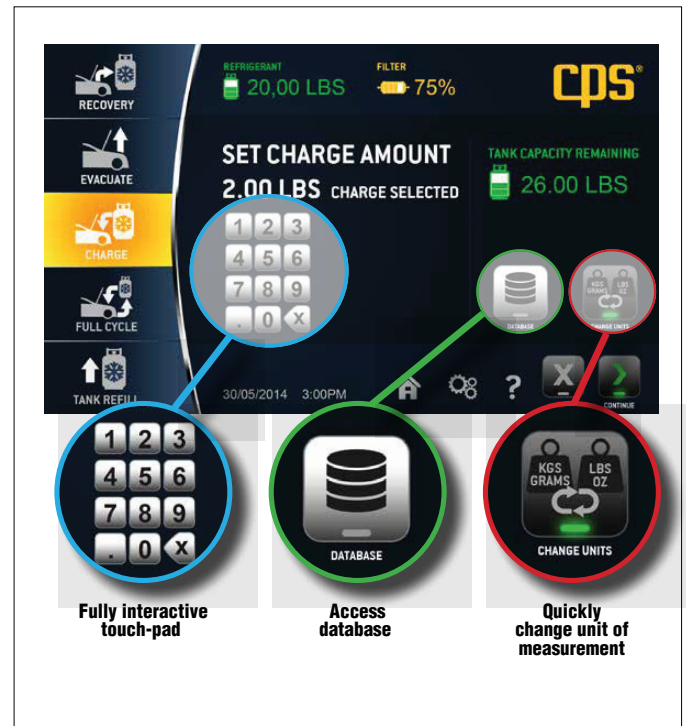

## FEATURES

- 7" Color touch screen control panel
- Warranty: 1 year labor/2 years parts/5 years compressor
- Displays maximum load up to 220 lbs. (up to 100 kg)
- Foam-filled wheels
- Refrigerant Management System monitors filter life and refrigerant usage
- Hybrid compatible
- Patented unique (FX3030 only), fast and complete refrigerant changeover system
- Supports multiple languages/UOM
- Quickly access all functions from the main screen
- 'Car Health' Mode enables printing a snap-shot of pressures before and after service
- Dual handle bars/hose drapes

## 12.67 cc Oilless Compressor

- Designed and built by CPS for high capacity commercial applications
- Eliminates failure issues due to improper oil filling of traditional compressors

## MOTOR-CONTROLLED BALL VALVES

- Opens wider for greater flow
- Resistant to clogging of debris or sealants

## SPECIFICATIONS

- Thermal Printer (Optional on FX1234V)
- Vehicle database (included) Refrigerant and oil charging data
- Recovery tank (two with FX3030)
- Recovery rate = Up to 1 lb/min
- 6 CFM vacuum pump/ 10 micron rated
- 3.5" gauges
- 10' power cord
- 115v, 850 W

## OPTIONAL ACCESSORIES



Part No.	Certification	Refrigerant	Dimensions (inches)				UPC	HTC
			H (in)	W (in)	D (in)	Weight (lb)		
<b>FX134A</b>	SAE J2788H	R134a	47.5	27.5	25	208	750377134012	8415.83.90
<b>FX1234V</b>	SAE J2843	R1234yf	47.5	27.5	25	208	750377119990	8415.83.90
<b>FX1234</b>	SAE J2843	R1234yf	47.5	27.5	25	208	750377123405	8415.83.90
<b>FX3030</b>	SAE J3030	R134a & R1234yf	60	27.5	25	240	750377303012	8415.83.90