


cps[®] **AUTOMOTIVE**

**PREMIUM A/C PRODUCTS BUILT
SPECIFICALLY FOR TECHNICIANS**

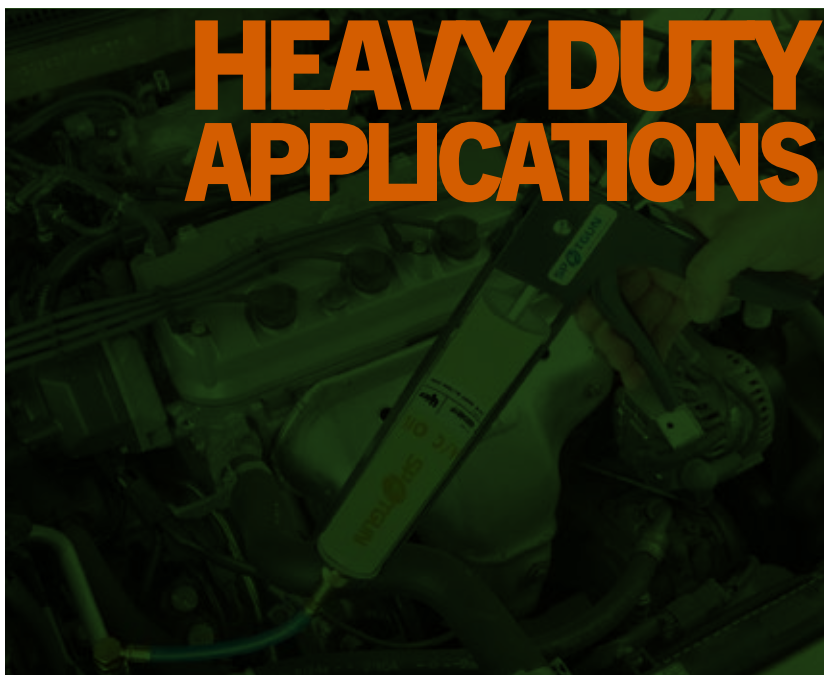

MAXX AIR
A CPS[®] BRAND

VIEW
A CPS[®] BRAND

MOTORVAC
A CPS[®] BRAND

cps[®]

Fully automatic, capable of fast and efficient servicing of large capacity R134A A/C systems.



HEAVY DUTY R-134A SINGLE GAS RRR

Fully automatic with tank-to-tank capability for remote service
MXHD

- External tank design offers flexibility in tank size and tank changing during service
- Comes standard with a 50 lb. tank and is compatible with the optional 90 lb. tank
- Features a 6 CFM dual-stage vacuum pump to decrease cycle time for large systems
- Features a large 12.67 cc twin piston oilless compressor for faster recovery and the ability to pass liquid refrigerant
- Wifi and Bluetooth® enabled
- Heavy duty steel frame construction
- Large 10" foam-filled tires



Tank-to-Tank Recycle Function On-site RRR for Large-Scale Vehicles and Equipment



Fast and simple process to recycle recovered refrigerant and charge back into a source tank for in field recharges. Suitable for 30, 50 and 90 Lb tank capacities with easy access to *Tank-to-Tank Recycle* feature from MXHD main menu.



Comes standard with a heater blanket to reduce recharge times



Easy-to-access tank and filter, removable for transportation to protect the scale calibration



Optional panel-mounted printer or Wi-Fi and Bluetooth® print options



7" color touch screen for fast and easy navigation featuring multiple languages

Industry-leading speed and precision

MSX
S E R I E S



MAXX 
A CPS® BRAND

OPTIMIZED FOR
VIEW
A/C OILS



Precision performance with increased productivity.

	MSX134	MSX3030	MSX1234
	R-134A	R-134A / R-1234YF	R-1234YF
Fully automatic or user selected manual processes	✓	✓	✓
7-inch color touch-screen display	✓	✓	✓
Hybrid / EV Ready		✓	✓
Built-in refrigerant identifier		✓	✓
High-capacity oilless compressor significantly reduces recovery time	✓	✓	✓
Includes 30lb tank, upgradeable to 50lb tank	✓	Includes 2 tanks	✓
WiFi and Bluetooth® enabled	✓	✓	✓
Onboard Oil Injection	✓		
Wireless network printing	✓	✓	✓
2-Year full coverage warranty	✓	✓	✓



Enhanced navigation on a 7"
color touch-screen display



Conveniently located refrigerant tank to
allow for quick and easy tank change



Built-in refrigerant identifier (Equipped on
the MSX1234 and MSX3030 models)



ACDB21 A/C Database
SD Card



MXXC Dust Cover
Durable, water-repellent,
fitted nylon dust cover



FX3030X1 Filter Maintenance kit
ARXF5 Filter only
Includes filter, vacuum pump
oil and coupler o-rings.



FXP1 HFO oil promotional kit
FXP2 Dual oil promotional kit
Includes oil injection kit, electronic leak detector,
filter maintenance kit and digital thermometer.

cps
AUTOMOTIVE

cpsproducts.com

©CPS Products All rights reserved.

HYDRAULIC FLARING TOOL KIT WITH 45° AND 37° ADAPTERS

TL4537

Ideal for producing 45° SAE inverted, ISO bubble, push-connect, GM fuel line and single flares quickly and accurately for brake, fuel, transmission, vacuum, oil, coolant, hydraulic, or other custom hard lines

INCLUDES:

- 1 x Hydraulic crimp pump
- 1 x Hydraulic crimp yoke
- 1 x pipe cutter

19 X ADAPTER:

- Push connect adapter 1/4", 5/16", 3/8", 1/2"
- 5° & double flaring adapter 3/16", 1/4", 5/16", 3/8", 1/2"
- Metric bubble flaring adapter 4.75mm, 6mm, 8mm, 10mm
- GM fuel line adapter 5/16", 3/8"
- GM transmission cooling line adapter 3/8", 1/2"
- 45° Flaring cone
- OPO positioning pin

17 X DIE SET:

- Push connect die set 1/4", 5/16", 3/8", 1/2"
- 45° & double flaring die set 3/16", 1/4", 5/16", 3/8", 1/2"
- Metric Bubble Flaring Die Set 4.75mm, 6mm, 8mm, 10mm
- GM Fuel Line Die Set 5/16", 3/8"
- GM Transmission Cooling Line Die Set 3/8", 1/2"
- 37° 3/16", 1/4", 5/16", 3/8" and 1/2" adapters
- 37° 3/16", 1/4", 5/16", 3/8" and 1/2" die sets
- 37° cone



for 37° flaring



HYDRAULIC A/C HOSE CRIMPER KIT

TLHHCK

Save on labor time and cost

APPLICATIONS:

- A/C hose sizes #6, #8, #10, #12 and reduced barrier #6, #8, #10 and #12

INCLUDES:

- Hydraulic crimp pump
- Hydraulic crimp yoke
- Pipe cutter
- Seven die sets including: 6SRB, 6-8SRB, 10SRB, 12SRB, 8, 10, and 12



HOSE SIZES:

- #6(5/16"), #8(13/32"), #10(1/2"), #12(5/8")
- Reduced Barrier #6(5/16"), #8(13/32"), #10(1/2"), #12(5/8")



A/C VALVE CORE REMOVAL TOOL KIT (11-PC)

TLVC5

Ideal for replacing valve cores without discharging the system while speeding recovery and recharging systems

- Quickly attaches to R-134a/R-1234yf service ports to remove and replace valve cores without refrigerant loss

Includes:

- R-1234YF high side quick connect
- R-1234YF low side quick connect
- R-134a high side quick connect
- R-134a low side quick connect
- Master shut off valve
- Standard valve core remover
- GM large bore core remover
- JRA valve core remover
- 8mm valve core remover
- 10mm valve core remover
- Valve steam and core tool





INFRARED THERMOMETER (NON-CONTACT)

TMINI12

Easy, instant temperature measurement over a wide range of applications.

The TMINI12 offers convenient one-hand operation, 8 point laser sighting, a backlit LCD display, °F/°C selection, automatic power off feature, built-in LED light, K-Type input for use with optional accessory temperature probes.

- Measure coolant temperature
- Measure belt and pulley temperature
- Test your A/C system by measuring temperatures of inlets, outlets and supply lines, output vents and condenser
- Detect excessive heat in brake components



VACROMETER™ DIGITAL VACUUM GAUGE

VG200

- Advanced sensor design with self-heated thermistor bridge and automatic temperature compensation
- Field cleanable sensor designed to withstand 400 Psi of positive pressure
- Calibrated to strict NIST standards for best-in-class accuracy and reliability
- Designed and manufactured in the USA with U.S. and globally sourced components

Includes:

- Brass adapter
- Swivel hanging hook
- Padded vinyl storage case



R-134A MANIFOLD SET

MAID8QZ

Brand:BLACKMAX®
Valves:2-Valve
Body type:Black
anodized aluminum
Fittings:1/4" SAE 45°

Gauges:2-1/2"
silicone dampened
Accuracy:1.6
Hoses:(3) 8'
Couplers: Manual R-134a

Includes: Protective gauge boots,
hanging hook and tin carrying case



R-134A, R-1234YF MANIFOLD SET

MAID8QDL

Brand:BLACKMAX®
Valves:2-Valve
Body type:Black
anodized aluminum
Fittings:1/2" ACME for both

Gauges:2-1/2"
silicone dampened
Hoses:(3) 8'
Couplers:Two sets manual

Includes: Protective gauge boots,
hanging hook and tin carrying case

SPOTGUN® INJECTION MASTER KIT

490200

This all-in-one solution provides you with unparalleled reliability and exceptional results. With the UView® SpotGun® Injector, you can easily tackle A/C system repairs and maintenance. So trust the UView® SpotGun® Injection Master Kit for top-notch performance and enjoy the benefits of seamless, efficient service.

INCLUDES:

- SpotGun® Injector with Purge Valve Adapters
- R-134a and R-1234yf Couplers
- (2) SpotGun® Service Hose Assemblies
- (1) Universal Oil Cartridge (8 oz/240 ml)
- (1) ExtenDye™ Cartridge (8 oz/240 ml)
- Phazer™ BLACK 395 Rechargeable UV Leak Detection Light
- UV Enhancing Glasses



AIRLIFT®

AIRLIFT™ II HD

550500HD

- Quickly and easily removes airlocks from HD cooling systems
- Eliminates the time consuming process of refilling and bleeding cooling systems by creating a vacuum that refills the entire EGR coolers, intercoolers, and aftercoolers
- Equipped with a 90° angled gauge to accommodate tight fit applications and also checks for leaks while under vacuum
- Includes a cone adapter to fit most systems with an extra-long 8' hose for hard-to-reach areas
- OEM Approved by International Truck



VACUFILL™

VACUFILL™ JR. WITH UNIVERSAL RADIATOR COOLING SYSTEM PRESSURE ADAPTER KIT

580000

Specially designed to work with the coolant refill system

- Detects and exposes external system leaks
- Detects internal engine leaks due to blown gaskets or damaged block
- Compatible with the coolant refill system

INCLUDES:

- Coolant refill system
- Pail fill capacity 4.25 Gal./16.2L. Overall Pail size 6-Gallon
- 25-Piece Airlift™ Universal Radiator Pressure Test Kit, P/N 575000



DIESELTUNE™ EGR CLEANING TOOL

500-0170M

For diesel EGR system cleaning on intake and exhaust sides of EGR valve and cooler

EGR Systems can become clogged with carbon deposits affecting fuel economy and performance of a diesel vehicle. The DieselTune™ EGR Cleaning Tool applies the powerful Diesel-Tune™ EGR System Cleaner into the circuit. For most applications, the exhaust side of the EGR is serviced, then the intake side. This cleaner rapidly dissolves deposits, eliminating issues commonly associated with plugged EGRs. Adding DieselTune™ Max Strength Fuel Injector Cleaner cleans the pump and injectors, completing the full diesel fuel service.

- Designed for on-vehicle cleaning of the EGR circuit
- Our EGR adapters are field tested and designed to deliver the most effective service
- Designed for many diesel EGR applications



MOTORVAC® COMPLETE FUEL SUPPLEMENT

400-3022

- Raises cetane number four to six points
- Improves cold weather starting
- Eliminates water using exclusive HydroBond Technology
- Reduces DPF regeneration cycles
- Meets CEC F 098-08 DW10 injector cleaning standard



MOTORVAC® MAX STRENGTH FUEL INJECTOR CLEANER

400-3012

- Exceeds industry injector cleaner standards for Cummins L-10 and CEC DW10
- Eliminates water using our exclusive HydroBond Technology
- Increases cetane by up to three points



HEAVY DUTY BLADDER PLUG

WVA-124

With through-hole and pressure pop-off valve

- 2.9" expands to seal or plug large intake or exhaust openings of up to 6"
- Body will flex for curved applications
- Heavy duty bladder easily conforms to round or irregular shapes

TURBO ADAPTERS

WVA-116 110MM, 115MM, 120MM


WVA-117 125MM, 130MM, 135MM



MOTORVAC®

Preventive Maintenance Solutions

QUICKLY FINDS PERFORMANCE-ROBBING LEAKS

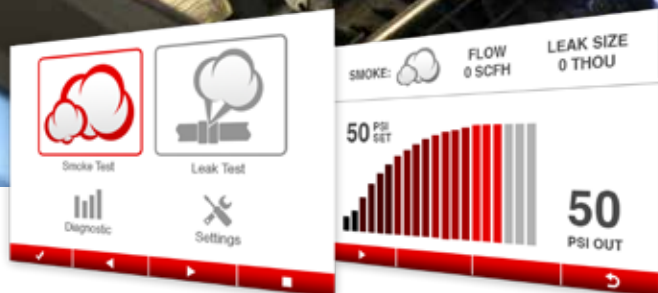

The patented Cool Smoke® process does not use a heat source to generate its UV dye enhanced smoke.

No heat means the machine produces a high-density smoke immediately.

COOL SMOKE® MP MULTI-PRESSURE LEAK DIAGNOSTIC SYSTEM 500-0175

- Operates on 12 to 24 VDC, is not polarity sensitive, and draws minimal current
- Delivers dense smoke with UV dye across its entire operating range of 0.5 PSI in EVAP mode/ 3-60 in HP mode, unlike competitive products that must reduce smoke output at higher pressures due to limitations in their technologies
- Measures pressure decay, leak sizes, and flow rates accurately over the entire pressure range due to high precision sensors and electronic controls that aren't possible with mechanical gauges

- Advanced 3.5" multi-color display with integrated software and Bluetooth® capabilities for future functional expansion
- Customer configurable settings include multiple languages and units of measure
- Multiple adapter configurations ensure the ability to connect to any automotive induction system component

200-0150

COOL SMOKE® TURBO ADAPTER KIT

Includes plugs, hoses, clamps, lights and glasses.



ISO 9001
CERTIFIED



FOR MORE INFORMATION: Phone: (305) 687-4121 Toll Free: (800) 277-3808

**CPS PRODUCTS (USA)
GLOBAL HEADQUARTERS**
3600 Enterprise Way
Miramar, FL 33025 USA
automotive@cpsproducts.com

CPS PRODUCTS CANADA
1324 Blundell Road
Mississauga, ON, L4Y 1M5
sales@cpsproducts.com

CPS PRODUCTS EUROPE
Entrepotstraat 3, 9100
St-Niklaas, Belgium
+32 3281 30 40
info@cpsproducts.be

CPS PRODUCTS AUSTRALIA
109 Welland Avenue
Welland, South Australia 5007
61-8-8340-7055
sales@cpsaustralia.com.au