ANTARCTIC Diesel Heater

00-ANT, 00-ANT-12-1T, 00-ANT-12-2T*

*00-ANT-12-1T & 00-ANT-12-2T includes water heating coil option



Key Features

- Stainless steel body & construction
- Designed for Marine use
- Produces heat even without connection to power
- Safety fuse offers overheating protection
- Floor mounted
- Built in draft assist
- Externally mounted fan control

Capacity & Specifications

- Draft type: Natural Draft
- Max. Heating capacity: 800 sq. ft
- Fuel input: #2 Diesel
- Max. fuel input pressure: 3 PSI
- BTU/hr: 16250
- Electrical input: 12 Vdc, .4 amp
- Draft assist fan: built-in
- Metering valve rating: 3D
- Flue diameter: 3”
- Min / max flue heights: 4’ / 10’
- Dimensions (inches): H 25, W 13, D 14
- Safety clearances (inches): 30 above, 12 at sides, 2* behind

*to protected surface

Venting Components

3” x 24” s/s pipe	16-000
3” x 24” s/s pipe with barometric damper	16-001
3” x 7” s/s pipe with barometric damper	16-010
3” x 45° s/s elbow	16-040
3” s/s deck fitting, gasket & dress ring	16-050
3” s/s DP exhaust cap	16-080
3” s/s H exhaust cap	16-090
3” s/s flue pipe rain lid	16-200
12” x 24” s/s wall liner	25-000

Fuel Supply Components

Fuel Tank 2 gallon	24-001
Fuel Tank 5 gallon	24-002
Fuel Filter & shut off	20-010
Fuel Pump	20-000
Fuel Pump - heavy duty	20-002

Installation Components included

- Fuel Metering Valve
- Auger
- Low sulfur baffle
- Super-heater & burner ring
- Drip Tray

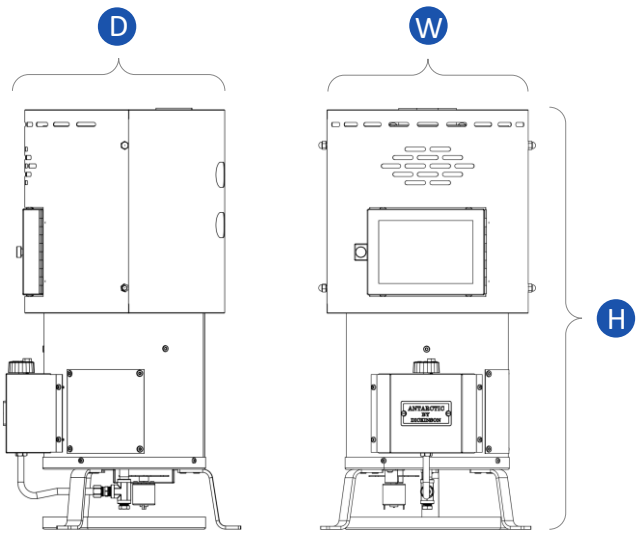

NOTE: Dimensions are for planning purposes only. For complete details, see installation instructions with product. Specifications subject to change without notice. All rights reserved.