

Features & Benefits

- Dust & insect filter as standard
- Built-in air-deflector
- Concealed screw fixings
- Easy to regulate
- Low pressure drop



Fresh 40

Window vent which is positioned over a row of holes or a slot in the frame/arch. The front functions as combined damper and air deflector. An external grille is mounted outside to prevent water penetration.

Specification

| Product | Description | Art no |
|------------------------------|--|--------|
| Fresh 40 Individually packed | Complete vent with internal part and external grille | 401031 |
| Fresh 40 Bulk | Complete vent with internal part and external grille | 401021 |
| Fresh 40 Internal part | Internal part | 401011 |

Technical data

| | |
|---------------|--|
| Capacity: | 9,2 l/s at 10 Pa |
| Wall opening: | Slot 400 x 10 mm or row of holes 24 x Ø10 mm |
| Material: | ABS plastic (recyclable) |
| Colour: | White, RAL 9010 |

Description/function

Window vent which is positioned over a row of holes or a slot in the frame/arch. A complete vent contains internal part and external grille. The internal part is supplied with a dust & insect-filter as standard. The external grille prevents water penetration and has a built-in mesh. A drill pattern is available as accessory.


Internal part

The front functions as combined damper and air-deflector. The airflow is simply regulated by opening/closing the front (with help of the handles on each side). When the front is fully open the air enters nearly straight forward, the air-direction is easily adjusted by gradually closing the front.

Maintenance

In order to ensure correct airflow and to retain good air quality it is important to wash the filter 1-2/year (use a gentle soap/detergent).

Capacity

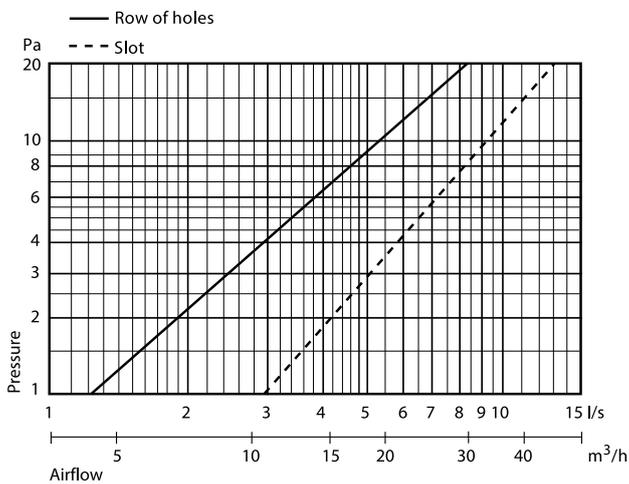

Accessories



Drill pattern
Aligns the drill and provides the correct distance between holes



Filter
Washable dust & insect-filter




Channel 33
Intended for hole profiles in plastic and aluminium windows.




Storm shield
Protection against heavy winds



Verticle grille (VG)
Used as external grille when mounted vertically (368x22mm)

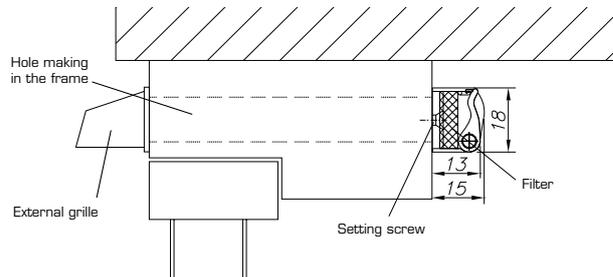

Dimensions Fresh 40

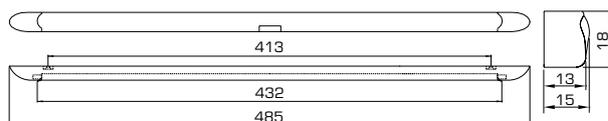

Technical data Fresh 40

| | |
|--------------------|--|
| Capacity at 10 Pa: | Slot 9,2 l/s Row of holes 5,3 l/s |
| Wall opening: | Slot 400 x 10 mm Row of holes 24 x Ø10 mm |
| Material: | ABS plastic (recyclable) |
| Colour: | White, RAL 9010 |