

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2:2019 & ISO 14025 / ISO 21930



BROEN Full Flow ball valve

- Stainless steel
- Flexible Connections
- Low stem / High Stem

EPD HUB, HUB-0974

Publishing date 21 December 2023

Last updated date 21 December 2023

Valid until date 21 December 2028

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Broen A/S
Address	Skovvej 30, DK-5610 Assens
Contact details	broen@broen.com
Website	https://www.broen.com

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Manufactured product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4, D
EPD author	BROEN (A/S) – Ibrahim Khaled Matar; Haider Saied.
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

Product name	BROEN Full Flow - Stainless steel
Additional labels	This EPD covers all BROEN Full Flow Stainless Steel valves in the range of DN10 to DN50 (See complete range in ANNEX on page 13-17)
Product reference	Boen Fullflow stainless steel 2032001201-0100 - High Stem DN32 Press x Male
Place of production	Denmark Skovvej 30, DK-5610 Assens
Period for data	December 2021 - November 2022
Averaging in EPD	Multiple products
Variation in GWP-fossil for A1-A3	-10 % + 21 %

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 kg.
Declared unit mass	1 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	1,26E+01
GWP-total, A1-A3 (kgCO ₂ e)	1,24E+01
Secondary material, inputs (%)	75%
Secondary material, outputs (%)	60%
Total energy use, A1-A3 (kWh)	60,8
Total water use, A1-A3 (m ³ e)	2,48E-01

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

BROEN Valve Technologies is a leading international manufacturer of valve technology and we operate on three continents across the world.

BROEN is headquartered in Assens, Denmark and is part of Aalberts N.V. listed on the EuroNext Stock Exchange (NL).

For more than 70 years BROEN has been the global leader in the development and production of valve technology for the control of water, air and gas.

BROEN delivers complete solutions for HVAC building installations and is a leading supplier of district energy valves and valve technology for natural gas.

PRODUCT DESCRIPTION

This EPD covers all BROEN Full Flow Stainless Steel valves in the range of DN10 to DN50 (See complete range in ANNEX on page 13-17)

Applications:

Drinking water:

With the BROEN Full Flow valve, you can be confident that all applicable standards for drinking and potable water systems are met. All system components are made of stainless steel and therefore corrosion resistant – even when they are exposed to demineralized or distilled water. BROEN Full Flow valves in stainless steel thus eliminate the risk of mixture with other material types from different components.

Treated water:

BROEN Full Flow in stainless steel is particularly well suited for treated water where you have demanding material requirements. All parts in connection with the water incl. the ball are produced in acid-proof stainless steel (AISI316).

Heating:

BROEN Full Flow is the best solution for heating systems. Before they leave the factory, the compact fittings are subjected to stringent quality assurance and leakage testing throughout the entire production process. Together with laser welding technology, the energy-optimized flow design gives all fittings a very low internal flow resistance.

Cooling:

BROEN Full Flow is the valve of tomorrow for cooling installations, and it provides the same advantages as those for heating installations: It is the optimal energy-efficient solution with the lowest possible flow resistance. Furthermore, you can adapt the choice of material to the individual installation. BROEN Full Flow valves with increased stem length also provide proper, diffusion-proof insulation for the entire installation.

Air pressure:

The BROEN Full Flow valve can be used for a number of air pressure installations. Depending on the water and oil content you can either use the galvanized version or the stainless steel valve to meet bigger demands.

Approvals:

- DVGW Wasser
- KIWA SE
- SINTEF
- VA (ETA)
- KUKReg4

Further information can be found at <https://www.broen.com>.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	95	Europe and Asia
Minerals	0	-
Fossil materials	5	Europe and Asia
Bio-based materials	0	-

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.0781

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 kg.
Mass per declared unit	1 kg
Functional unit	-
Reference service life	-

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage								End of life stage				Beyond the system boundaries	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational	Operational	Deconstr./demol	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The valve is made of stainless steel, PTFE and nylon. The stainless steel is received as tubes or bars in the factory and components are manufactured by processing the bars and tubes. The processes used to process the steel are milling, drilling, cutting and pressing. Scrap material derived from the

production are sent to recycling, directly from the factory.

Nylon and PTFE parts are sourced and are directly consumed in the assembly of the valve.

The valve consist of following components.

- Retaining Ring
- Stem
- Stem Guide
- Lock ring for sealing box
- Support ring
- Body Stainless Steel
- Ball
- Optional combinations of 2 connection ends
- Press end Stainless - Annealed
- Male end
- Female end
- Swivel nut

In addition it is possible to choose between 3 different handle options.

- L handle
- T handle
- Gear handle

The handles are made from nylon and stainless steel and for the gear handle stainless steel nylon & PTFE.

Other polymer parts include O-rings made from EPDM and seats made of PTFE.

Additional processes used to manufacture the valves are welding, testing and packaging.

The transport assumptions are based on the actual distances between the supplier and Broen for each component. The production loss is metal scrap from the processing of metals.

CO₂ emissions from the consumption of electricity is based on the actual emission provided by the supplier, where at least 50% comes from renewable sources.

For packaging a cardboard package is used, and no other material. The cardboard's transportation distance is defined as the distance between the supplier and Broen, both located in Denmark.

The ancillaries for the production is tap water, mineral oils for lubrication purposes and argon gas. The tap water waste is run to treatment facilities via pipes, the argon gas can not be collected and is simply diffused in air and the mineral oils are collected then sent for waste treatment. The mineral oils transportation is defined as the distance between Broen and the treatment facility in Denmark. The obtained scrap from the metal processing is sent to authorised recycling facilities, and the transportation is defined as the distance between Broen and the facilities.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

The transportation is defined according to the PCR. Distance of transportation from production to building site, is estimated from the countries with the largest sales volume, The transportation method is a combination of lorry and containership, depending on the country. Vehicle capacity utilization volume factor is assumed to be 1 which means full loads, it may vary but as role of transportation emission in total results are small, the variety is assumed to be negligible. Empty returns are not taken into account as it is assumed that the return trip is used by the transportation company to serve the needs of other clients. Transportation does not cause losses as products are packaged properly. Also, volume capacity utilisation factor is assumed to be 1 for the nested packaged products.

The only waste in A5 for the product comes from the packaging. The transportation from building site to recycling station is assumed to be 100 km in all scenarios.

PRODUCT USE AND MAINTENANCE (B1-B7)


A BROEN Full Flow ball valve needs no maintenance, repair or refurbishment and has no operational water or energy use during its lifetime.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

The consumption of energy and natural resources for disassembling the end-of-life is assumed to be negligible, as the disassembly of the product is done by the buyer or the recycling facilities (C1). The end-of-life product is assumed to be sent to the closest facilities by lorry, which is dependent on the individual country (C2). 85% of the product is sent for recycling, and 85% of polymer parts are sent for incineration with energy recovery (C3). 15% of the end-of-life product is assumed to go to a landfill or be lost in the processing (C4). Due to the recycling and incineration potential of metals and plastics, the end-of-life is converted into recycled materials, while heat is produced from material incineration (D). The benefits and burdens of waste packaging in A5 are also considered in module D.

MANUFACTURING PROCESS

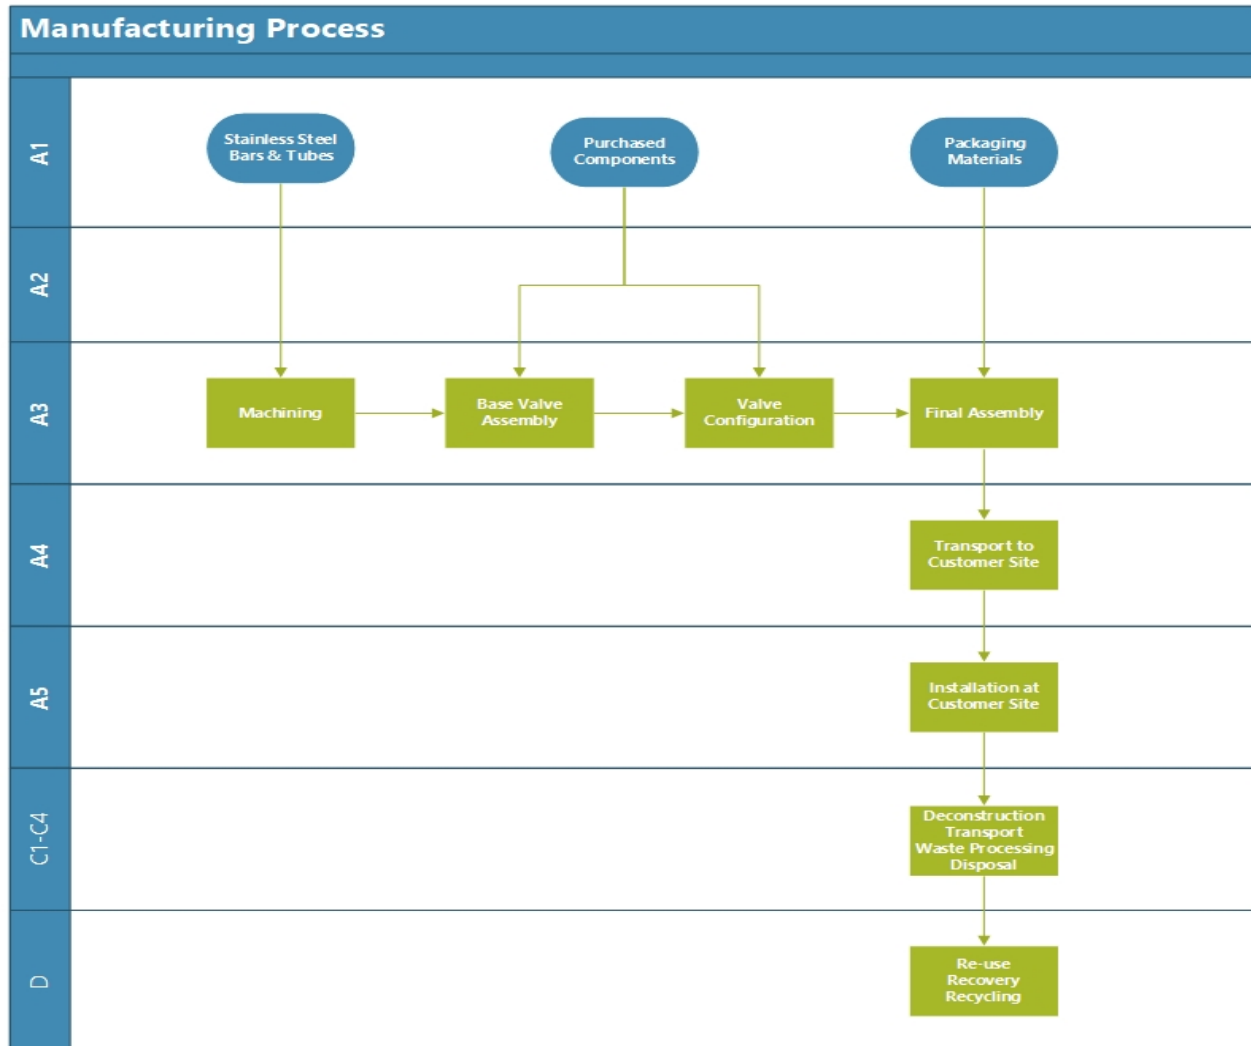

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass. . The is no materials used in the installation stage. The installation process uses hand tools or electrical hand tools. The amount of energy use to install 1 KG of valve is considered neglectable

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	Allocated by mass or volume
Packaging materials	Allocated by mass or volume
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

AVERAGES AND VARIABILITY

Type of average	Multiple products
Averaging method	Representative product
Variation in GWP-fossil for A1-A3	-10 % + 21 %

The Broen FullFlow Stainless steel DN32 PRESS/ MALE valve has been selected as the representative valve. It has two different connections, and initial calculations revealed that it was closest to the general average of mass for a BROEN Full Flow valve.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent 3.8 and One Click LCA databases were used as sources of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	1,13E+01	1,07E-01	1,04E+00	1,24E+01	6,22E-02	2,91E-01	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	9,71E-02	1,54E-03	-1,33E-02
GWP – fossil	kg CO ₂ e	1,13E+01	1,07E-01	1,27E+00	1,26E+01	6,22E-02	5,06E-03	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	9,71E-02	1,54E-03	-1,39E-02
GWP – biogenic	kg CO ₂ e	8,36E-03	0,00E+00	-2,94E-01	-2,86E-01	0,00E+00	2,86E-01	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP – LULUC	kg CO ₂ e	1,35E-02	4,63E-05	6,61E-02	7,96E-02	2,90E-05	3,14E-06	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,37E-05	6,56E-07	5,20E-04
Ozone depletion pot.	kg CFC ₁₁ e	5,40E-07	2,40E-08	8,57E-08	6,49E-07	1,40E-08	1,45E-10	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,52E-09	3,29E-10	-4,61E-09
Acidification potential	mol H ⁺ e	6,31E-02	9,91E-04	7,02E-03	7,11E-02	7,63E-04	1,74E-05	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,43E-04	7,77E-06	-1,13E-03
EP-freshwater ²⁾	kg Pe	4,72E-04	7,85E-07	1,44E-04	6,16E-04	3,81E-07	1,45E-07	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,06E-06	9,71E-09	-4,61E-06
EP-marine	kg Ne	1,12E-02	2,63E-04	1,35E-03	1,28E-02	1,98E-04	4,71E-06	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	5,54E-05	3,49E-06	-4,09E-04
EP-terrestrial	mol Ne	1,20E-01	2,91E-03	1,10E-02	1,33E-01	2,20E-03	4,07E-05	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	6,33E-04	2,95E-05	-2,62E-03
POCP (“smog”) ³⁾	kg NMVOCe	3,75E-02	8,29E-04	3,50E-03	4,19E-02	6,07E-04	1,21E-05	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,75E-04	8,73E-06	-9,80E-04
ADP-minerals & metals ⁴⁾	kg Sbe	3,08E-04	2,32E-07	9,64E-06	3,18E-04	1,29E-07	6,92E-08	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,11E-06	3,61E-09	-2,90E-06
ADP-fossil resources	MJ	1,27E+02	1,56E+00	2,68E+01	1,55E+02	8,99E-01	3,30E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,63E-01	2,26E-02	6,29E-01
Water use ⁵⁾	m ³ e depr.	4,86E+00	6,61E-03	4,97E+00	9,84E+00	3,76E-03	1,06E-03	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	6,20E-03	3,36E-04	-1,08E+00

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	8,63E-07	1,07E-08	4,34E-08	9,17E-07	5,75E-09	2,48E-10	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	3,21E-09	1,54E-10	-2,28E-08
Ionizing radiation ⁶⁾	kBq U235e	7,86E-01	7,39E-03	6,89E-01	1,48E+00	4,45E-03	4,83E-04	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,38E-03	9,93E-05	5,79E-02
Ecotoxicity (freshwater)	CTUe	3,62E+02	1,34E+00	2,49E+01	3,88E+02	7,14E-01	1,75E-01	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,17E+00	1,63E-02	1,96E+01
Human toxicity, cancer	CTUh	2,20E-07	4,06E-11	1,09E-09	2,21E-07	2,55E-11	1,02E-11	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	4,22E-11	3,84E-13	1,34E-08
Human tox. non-cancer	CTUh	2,86E-07	1,27E-09	1,93E-08	3,06E-07	6,87E-10	1,10E-10	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,61E-09	1,02E-11	-4,12E-09
SQP ⁷⁾	-	6,17E+01	1,55E+00	8,45E+00	7,17E+01	8,17E-01	2,30E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	4,05E-01	4,83E-02	-2,92E+00

6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	2,77E+01	1,65E-02	3,83E+01	6,61E+01	1,00E-02	4,20E-03	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	4,28E-02	2,14E-04	-1,40E+00
Renew. PER as material	MJ	0,00E+00	0,00E+00	2,50E+00	2,50E+00	0,00E+00	-2,50E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	2,77E+01	1,65E-02	4,08E+01	6,86E+01	1,00E-02	-2,50E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	4,28E-02	2,14E-04	-1,40E+00
Non-re. PER as energy	MJ	1,26E+02	1,56E+00	2,57E+01	1,53E+02	8,99E-01	3,29E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,63E-01	2,26E-02	6,50E-01
Non-re. PER as material	MJ	1,52E+00	0,00E+00	2,02E-02	1,54E+00	0,00E+00	-2,02E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	-1,29E+00	-2,28E-01	0,00E+00
Total use of non-re. PER	MJ	1,27E+02	1,56E+00	2,57E+01	1,54E+02	8,99E-01	1,28E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	-1,03E+00	-2,06E-01	6,50E-01
Secondary materials	kg	1,06E+00	4,76E-04	2,03E-01	1,27E+00	2,92E-04	1,02E-04	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,18E-04	3,48E-06	-2,67E-02
Renew. secondary fuels	MJ	3,48E-03	3,98E-06	1,39E-02	1,74E-02	2,00E-06	4,42E-07	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,09E-05	9,25E-08	-1,35E-02
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³	1,31E-01	1,86E-04	1,17E-01	2,48E-01	1,04E-04	2,83E-05	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,46E-04	2,47E-05	6,99E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	9,87E+00	2,07E-03	1,18E-01	9,99E+00	1,07E-03	4,95E-04	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,12E-03	7,29E-06	1,76E-01
Non-hazardous waste	kg	1,92E+01	3,13E-02	6,08E+00	2,53E+01	1,56E-02	1,04E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	9,56E-02	1,50E-01	-6,30E-01
Radioactive waste	kg	3,16E-04	1,05E-05	1,99E-04	5,25E-04	6,21E-06	1,57E-07	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,50E-06	4,00E-08	6,44E-06

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	6,67E-01	6,67E-01	0,00E+00	1,96E-01	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy rec	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	9,44E-01	0,00E+00	0,00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	1,11E+01	1,06E-01	1,34E+00	1,25E+01	6,16E-02	6,64E-03	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	9,62E-02	1,32E-03	-7,13E-03
Ozone depletion Pot.	kg CFC ₁₁ e	4,72E-07	1,90E-08	7,18E-08	5,63E-07	1,11E-08	1,28E-10	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,06E-09	2,61E-10	-2,81E-09
Acidification	kg SO ₂ e	5,23E-02	7,84E-04	5,87E-03	5,90E-02	6,06E-04	1,38E-05	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	1,85E-04	5,29E-06	-7,78E-04
Eutrophication	kg PO ₄ ³ e	1,89E-02	1,21E-04	4,77E-03	2,38E-02	8,38E-05	2,12E-05	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,36E-04	3,37E-05	-3,15E-04
POCP ("smog")	kg C ₂ H ₄ e	2,72E-03	2,40E-05	2,65E-04	3,01E-03	1,75E-05	1,87E-06	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	8,65E-06	3,41E-07	-1,89E-04
ADP-elements	kg Sbe	3,07E-04	2,25E-07	9,38E-06	3,17E-04	1,25E-07	6,87E-08	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,10E-06	3,59E-09	-2,80E-06
ADP-fossil	MJ	1,27E+02	1,56E+00	2,68E+01	1,55E+02	8,99E-01	3,29E-02	MND	MND	MND	MND	MND	MND	MND	0,00E+00	0,00E+00	2,63E-01	2,26E-02	6,51E-01

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? [Read more online](#)

This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited

21.12.2023





	Spindle	Valve size	Connection 1	Connection 2	Handle
OPTIONS	High Low	DN10	Press Female Male Swivel	Press Female Male Swivel	L-handle T-handle Gear handle
		DN15			
		DN20			
		DN25			
		DN32			
		DN40			
		DN50			



BROEN FULL FLOW - STAINLESS STEEL – SIZES AND VARIANTS

ANNEX

Size	Product Number	Handle	Spindle	Connections	TOTAL GWP (A1-A3)
DN10	2010000100-0100	L	Low	15 15	2,08
DN10	2010000100-0200	GEAR	Low	15 15	2,25
DN10	2010000100-0400	T	Low	15 15	2,08
DN10	2010000101-0100	L	High	15 15	2,84
DN10	2010000101-0200	GEAR	High	15 15	3,01
DN10	2010000101-0400	T	High	15 15	2,84
DN10	2010001010-0100	L	Low	G½ 15	2,67
DN10	2010001010-0200	GEAR	Low	G½ 15	2,83
DN10	2010001010-0400	T	Low	G½ 15	2,66
DN10	2010001011-0100	L	High	G½ 15	3,46
DN10	2010001011-0200	GEAR	High	15 G½	3,62
DN10	2010001011-0400	T	High	G½ 15	3,45
DN10	2010001201-0200	GEAR	High	G A 15	3,43
DN10	2010001210-0100	L	Low	15 G½A	2,55
DN10	2010001210-0200	GEAR	Low	15 G½A	2,71
DN10	2010001210-0400	T	Low	15 G½A	2,55
DN10	2010001211-0100	L	High	15 G½A	3,34
DN10	2010001211-0200	GEAR	High	15 G½A	3,51
DN10	2010001211-0400	T	High	15 G½A	3,34
DN10	2010001410-0100	L	Low	G¾ 15	2,24
DN10	2010001410-0200	GEAR	Low	G¾ 15	2,41
DN10	2010001410-0400	T	Low	G¾ 15	2,24
DN10	2010001411-0100	L	High	G¾ 15	3,00
DN10	2010001411-0200	GEAR	High	SW¾ 15	3,17

DN10	2010001411-0400	T	High	G¾ 15	3,00
DN10	2010002000-0100	L	Low	G3/8 G3/8	2,97
DN10	2010002000-0200	GEAR	Low	G3/8 G3/8	3,13
DN10	2010002000-0400	T	Low	G3/8 G3/8	2,96
DN10	2010002001-0100	L	High	G3/8 G3/8	3,76
DN10	2010002001-0200	GEAR	High	G3/8 G3/8	3,93
DN10	2010002001-0400	T	High	G3/8 G3/8	3,76
DN10	2010002200-0100	L	Low	G3/8 SW.G½	2,78
DN10	2010002200-0200	GEAR	Low	G3/8 SW.G½	2,95
DN10	2010002200-0400	T	Low	G3/8 SW.G½	2,78
DN10	2010002201-0100	L	High	G3/8 SW.G½	3,58
DN10	2010002201-0200	GEAR	High	G3/8 SW.G½	3,74
DN10	2010002201-0400	T	High	G3/8 SW.G½	3,57
DN10	2010002400-0100	L	Low	G3/8 A G3/8	2,92
DN10	2010002400-0200	GEAR	Low	G3/8 A G3/8	3,09
DN10	2010002400-0400	T	Low	G3/8 A G3/8	2,92
DN10	2010002401-0100	L	High	G3/8 G3/8 A	3,72
DN10	2010002401-0200	GEAR	High	G3/8 G3/8 A	3,89
DN10	2010002401-0400	T	High	G3/8 G3/8 A	3,72
DN15	2015000100-0100	L	Low	18 18	2,51
DN15	2015000100-0200	GEAR	Low	18 18	2,67
DN15	2015000100-0400	T	Low	18 18	2,50
DN15	2015000101-0100	L	High	18 18	3,27
DN15	2015000101-0200	GEAR	High	18 18	3,44
DN15	2015000101-0400	T	High	18 18	3,27
DN15	2015001010-0100	L	Low	G¾ 18	3,45
DN15	2015001010-0200	GEAR	Low	G¾ 18	3,62
DN15	2015001010-0400	T	Low	G¾ 18	3,45
DN15	2015001011-0100	L	High	G¾ 18	4,22
DN15	2015001011-0200	GEAR	High	G¾ 18	4,38

DN15	2015001011-0400	T	High	G¾ 18	4,21
DN15	2015001200-0200	GEAR	Low	18 G1/2A	3,24
DN15	2015001200-0400	T	Low	18 G1/2A	3,07
DN15	2015001210-0100	L	Low	18 G¾A	3,42
DN15	2015001210-0200	GEAR	Low	18 G¾A	3,59
DN15	2015001210-0400	T	Low	18 G¾A	3,42
DN15	2015001211-0100	L	High	18 G¾A	4,19
DN15	2015001211-0200	GEAR	High	18 G¾A	4,35
DN15	2015001211-0400	T	High	18 G¾A	4,18
DN15	2015001400-0100	L	Low	G¾ 18	2,63
DN15	2015001400-0200	GEAR	Low	G¾ 18	2,80
DN15	2015001400-0400	T	Low	G¾ 18	2,63
DN15	2015001401-0100	L	High	G¾ 18	3,40
DN15	2015001401-0200	GEAR	High	SW¾ 18	3,56
DN15	2015001401-0400	T	High	G¾ 18	3,40
DN15	2015002000-0100	L	Low	G½ G½	3,61
DN15	2015002000-0200	GEAR	Low	G½ G½	3,77
DN15	2015002000-0400	T	Low	G½ G½	3,60
DN15	2015002001-0100	L	High	G½ G½	4,37
DN15	2015002001-0200	GEAR	High	G½ G½	4,54
DN15	2015002001-0400	T	High	G½ G½	4,37
DN15	2015002200-0100	L	Low	G½ SW.G¾	3,19
DN15	2015002200-0200	GEAR	Low	G½ SW.G¾	3,35
DN15	2015002200-0400	T	Low	G½ SW.G¾	3,18
DN15	2015002201-0100	L	High	G½ SW.G¾	3,95
DN15	2015002201-0200	GEAR	High	G½ SW.G¾	4,11
DN15	2015002201-0400	T	High	G½ SW.G¾	3,95
DN15	2015002400-0100	L	Low	G½ G¾A	3,63
DN15	2015002400-0200	GEAR	Low	G½ G¾A	3,79
DN15	2015002400-0400	T	Low	G½ G¾A	3,62

DN15	2015002401-0100	L	High	G½ G¾A	4,39
DN15	2015002401-0200	GEAR	High	G½ G¾A	4,56
DN15	2015002401-0400	T	High	G½ G¾A	4,39
DN20	2020000100-0100	L	Low	22 22	3,56
DN20	2020000100-0200	GEAR	Low	22 22	3,73
DN20	2020000100-0400	T	Low	22 22	3,56
DN20	2020000101-0100	L	High	22 22	4,34
DN20	2020000101-0200	GEAR	High	22 22	4,50
DN20	2020000101-0400	T	High	22 22	4,33
DN20	2020001000-0100	L	Low	G¾ 22	4,99
DN20	2020001000-0200	GEAR	Low	G¾ 22	5,16
DN20	2020001000-0400	T	Low	G¾ 22	4,99
DN20	2020001001-0100	L	High	G¾ 22	5,77
DN20	2020001001-0200	GEAR	High	G¾ 22	5,93
DN20	2020001001-0400	T	High	G¾ 22	5,76
DN20	2020001200-0100	L	Low	22 G¾A	4,65
DN20	2020001200-0200	GEAR	Low	22 G¾A	4,82
DN20	2020001200-0400	T	Low	22 G¾A	4,65
DN20	2020001201-0100	L	High	22 G¾A	5,43
DN20	2020001201-0200	GEAR	High	22 G¾A	5,59
DN20	2020001201-0400	T	High	22 G¾A	5,42
DN20	2020001410-0100	L	Low	G¾ 22	4,04
DN20	2020001410-0200	GEAR	Low	G¾ 22	4,20
DN20	2020001410-0400	T	Low	G¾ 22	4,03
DN20	2020001411-0100	L	High	G¾ 22	4,81
DN20	2020001411-0200	GEAR	High	G¾SW. 22	4,98
DN20	2020001411-0400	T	High	G¾ 22	4,81
DN20	2020002000-0100	L	Low	G¾ G¾	6,43
DN20	2020002000-0200	GEAR	Low	G¾ G¾	6,59
DN20	2020002000-0400	T	Low	G¾ G¾	6,42

DN20	2020002001-0100	L	High	G¼ G¼	7,20
DN20	2020002001-0200	GEAR	High	G¼ G¼	7,37
DN20	2020002001-0400	T	High	G¼ G¼	7,20
DN20	2020002200-0100	L	Low	SW.G1 G¼	5,28
DN20	2020002200-0200	GEAR	Low	SW.G1 G¼	5,45
DN20	2020002200-0400	T	Low	SW.G1 G¼	5,28
DN20	2020002201-0100	L	High	SW.G1 G¼	6,05
DN20	2020002201-0200	GEAR	High	SW.G1 G¼	6,22
DN20	2020002201-0400	T	High	SW.G1 G¼	6,05
DN20	2020002210-0100	L	Low	G¼ SW.G¼	5,47
DN20	2020002210-0200	GEAR	Low	SW.G¼ G¼	5,63
DN20	2020002211-0100	L	High	G¼ SW.G¼	6,24
DN20	2020002400-0100	L	Low	G¼A G¼	6,09
DN20	2020002400-0200	GEAR	Low	G¼A G¼	6,25
DN20	2020002400-0400	T	Low	G¼A G¼	6,08
DN20	2020002401-0100	L	High	G¼A G¼	6,86
DN20	2020002401-0200	GEAR	High	G¼A G¼	7,02
DN20	2020002401-0400	T	High	G¼A G¼	6,86
DN20	2220002155-0400	T	Low	G¼A T G¼A R	5,84
DN25	2025000100-0100	L	Low	28 28	6,03
DN25	2025000100-0200	GEAR	Low	28 28	6,41
DN25	2025000100-0400	T	Low	28 28	5,90
DN25	2025000101-0100	L	High	28 28	7,22
DN25	2025000101-0200	GEAR	High	28 28	7,60
DN25	2025000101-0400	T	High	28 28	7,09
DN25	2025001000-0100	L	Low	G1 28	7,59
DN25	2025001000-0200	GEAR	Low	G1 28	7,96
DN25	2025001000-0400	T	Low	G1 28	7,46
DN25	2025001001-0100	L	High	G1 28	8,77
DN25	2025001001-0200	GEAR	High	G1 28	9,14

DN25	2025001001-0400	T	High	G1 28	8,64
DN25	2025001200-0100	L	Low	28 G1A	7,71
DN25	2025001200-0200	GEAR	Low	28 G1A	8,09
DN25	2025001200-0400	T	Low	28 G1A	7,58
DN25	2025001201-0100	L	High	28 G1A	8,89
DN25	2025001201-0200	GEAR	High	28 G1A	9,27
DN25	2025001201-0400	T	High	28 G1A	8,76
DN25	2025001400-0100	L	Low	G1¼ 28	6,77
DN25	2025001400-0200	GEAR	Low	G1¼ 28	7,15
DN25	2025001400-0400	T	Low	G1¼ 28	6,64
DN25	2025001401-0100	L	High	G1¼ 28	7,96
DN25	2025001401-0200	GEAR	High	G1¼ 28	8,33
DN25	2025001401-0400	T	High	G1¼ 28	7,83
DN25	2025002000-0100	L	Low	G1 G1	9,17
DN25	2025002000-0200	GEAR	Low	G1 G1	9,55
DN25	2025002000-0400	T	Low	G1 G1	9,04
DN25	2025002001-0100	L	High	G1 G1	10,35
DN25	2025002001-0200	GEAR	High	G1 G1	10,73
DN25	2025002001-0400	T	High	G1 G1	10,22
DN25	2025002200-0100	L	Low	G1 SW.G1¼	8,33
DN25	2025002200-0200	GEAR	Low	G1 SW.G1¼	8,70
DN25	2025002200-0400	T	Low	G1 SW.G1¼	8,20
DN25	2025002201-0100	L	High	G1 SW.G1¼	9,51
DN25	2025002201-0200	GEAR	High	G1 SW.G1¼	9,88
DN25	2025002201-0400	T	High	G1 SW.G1¼	9,38
DN25	2025002400-0100	L	Low	G1A G1	9,30
DN25	2025002400-0200	GEAR	Low	G1A G1	9,68
DN25	2025002400-0400	T	Low	G1A G1	9,17
DN25	2025002401-0100	L	High	G1A G1	10,48
DN25	2025002401-0200	GEAR	High	G1A G1	10,86

DN25	2025002401-0400	T	High	G1A G1	10,35
DN25	2225002155-0400	T	(blank)	G1A T G1A R	9,39
DN25	2225002800-0400	T	Low	G1A NPT G1A R Ø22	9,43
DN32	2032000100-0100	L	Low	35 35	9,07
DN32	2032000100-0200	GEAR	Low	35 35	9,44
DN32	2032000100-0400	T	Low	35 35	8,94
DN32	2032000101-0100	L	High	35 35	10,48
DN32	2032000101-0200	GEAR	High	35 35	10,86
DN32	2032000101-0400	T	High	35 35	10,35
DN32	2032001000-0100	L	Low	G1¼ 35	11,68
DN32	2032001000-0200	GEAR	Low	G1¼ 35	12,05
DN32	2032001000-0400	T	Low	G1¼ 35	11,55
DN32	2032001001-0100	L	High	G1¼ 35	13,11
DN32	2032001001-0200	GEAR	High	G1¼ 35	13,49
DN32	2032001001-0400	T	High	G1¼ 35	12,98
DN32	2032001200-0100	L	Low	35 G1¼A	12,55
DN32	2032001200-0200	GEAR	Low	35 G1¼A	12,92
DN32	2032001200-0400	T	Low	35 G1¼A	12,42
DN32	2032001201-0100	L	High	35 G1¼A	13,98
DN32	2032001201-0200	GEAR	High	35 G1¼A	14,36
DN32	2032001201-0400	T	High	35 G1¼A	13,85
DN32	2032001400-0100	L	Low	G1½ 35	9,94
DN32	2032001400-0200	GEAR	Low	G1½ 35	10,31
DN32	2032001400-0400	T	Low	G1½ 35	9,81
DN32	2032001401-0100	L	High	G1½ 35	11,35
DN32	2032001401-0200	GEAR	High	G1½ 35	11,73
DN32	2032001401-0400	T	High	G1½ 35	11,22
DN32	2032002000-0100	L	Low	G1¼ G1¼	14,32
DN32	2032002000-0200	GEAR	Low	G1¼ G1¼	14,70
DN32	2032002000-0400	T	Low	G1¼ G1¼	14,19

DN32	2032002001-0100	L	High	G1¼ G1¼	15,68
DN32	2032002001-0200	GEAR	High	G1¼ G1¼	16,06
DN32	2032002001-0400	T	High	G1¼ G1¼	15,55
DN32	2032002200-0100	L	Low	SW.G1½ G1¼	12,55
DN32	2032002200-0200	GEAR	Low	SW.G1½ G1¼	12,93
DN32	2032002200-0400	T	Low	SW.G1½ G1¼	12,42
DN32	2032002201-0100	L	High	SW.G1½ G1¼	13,99
DN32	2032002201-0200	GEAR	High	SW.G1½ G1¼	14,36
DN32	2032002201-0400	T	High	SW.G1½ G1¼	13,86
DN32	2032002400-0100	L	Low	G1¼A G1¼	15,19
DN32	2032002400-0200	GEAR	Low	G1¼A G1¼	15,56
DN32	2032002400-0400	T	Low	G1¼A G1¼	15,06
DN32	2032002401-0100	L	High	G1¼A G1¼ D32	16,55
DN32	2032002401-0200	GEAR	High	G1¼A G1¼ D32	16,93
DN32	2032002401-0400	T	High	G1¼A G1¼ D32	16,42
DN40	2040000100-0100	L	Low	42 42	15,10
DN40	2040000100-0200	GEAR	Low	42 42	16,01
DN40	2040000101-0100	L	High	42 42	17,32
DN40	2040000101-0200	GEAR	High	42 42	18,23
DN40	2040001000-0100	L	Low	G1½ 42	18,77
DN40	2040001000-0200	GEAR	Low	G1½ 42	19,68
DN40	2040001001-0100	L	High	G1½ 42	20,97
DN40	2040001001-0200	GEAR	High	G1½ 42	21,88
DN40	2040001200-0100	L	Low	42 G1½A	20,00
DN40	2040001200-0200	GEAR	Low	42 G1½A	20,90
DN40	2040001201-0100	L	High	42 G1½A	22,20
DN40	2040001201-0200	GEAR	High	42 G1½A	23,11
DN40	2040001400-0100	L	Low	G1¼ 42	16,09
DN40	2040001400-0200	GEAR	Low	G1¼ 42	17,00
DN40	2040001401-0100	L	High	G1¼ 42	18,31

DN40	2040001401-0200	GEAR	High	G1½ 42	19,22
DN40	2040002000-0100	L	Low	G1½ G1½	22,43
DN40	2040002000-0200	GEAR	Low	G1½ G1½	23,34
DN40	2040002001-0100	L	High	G1½ G1½	24,65
DN40	2040002001-0200	GEAR	High	G1½ G1½	25,56
DN40	2040002210-0100	L	Low	G1½ SW.G2	19,83
DN40	2040002210-0200	GEAR	Low	G1½ SW.G2	20,73
DN40	2040002211-0100	L	High	G1½ SW.G2	22,03
DN40	2040002211-0200	GEAR	High	G1½ SW.G2	22,94
DN40	2040002400-0100	L	Low	G1½A G1½	23,66
DN40	2040002400-0200	GEAR	Low	G1½A G1½	24,57
DN40	2040002401-0100	L	High	G1½A G1½	25,88
DN40	2040002401-0200	GEAR	High	G1½A G1½	26,78
DN50	2050000100-0100	L	Low	54 54	26,32
DN50	2050000100-0200	GEAR	Low	54 54	27,23
DN50	2050000101-0100	L	High	54 54	28,48
DN50	2050000101-0200	GEAR	High	54 54	29,39
DN50	2050001000-0100	L	Low	G2 54	34,07
DN50	2050001000-0200	GEAR	Low	G2 54	34,98
DN50	2050001001-0100	L	High	G2 54	36,10
DN50	2050001001-0200	GEAR	High	G2 54	37,01
DN50	2050001200-0100	L	Low	54 G2A	37,44
DN50	2050001200-0200	GEAR	Low	54 G2A	38,35
DN50	2050001201-0100	L	High	54 G2A	39,47
DN50	2050001201-0200	GEAR	High	54 G2A	40,37
DN50	2050001400-0100	L	Low	G2¼ 54	28,29
DN50	2050001400-0200	GEAR	Low	G1¾ 42	29,20
DN50	2050001401-0100	L	High	G2¼ 54	30,45
DN50	2050001401-0200	GEAR	High	G2¼ 54	31,36
DN50	2050002000-0100	L	Low	G2 G2	41,31

DN50	2050002000-0200	GEAR	Low	G2 G2	42,21
DN50	2050002001-0100	L	High	G2 G2	43,48
DN50	2050002001-0200	GEAR	High	G2 G2	44,39
DN50	2050002200-0100	L	Low	G2 SW.G2 ¼	36,04
DN50	2050002200-0200	GEAR	Low	G2 SW.G2 ¼	36,95
DN50	2050002201-0100	L	High	G2 SW.G2 ¼	38,07
DN50	2050002201-0200	GEAR	High	G2 SW.G2 ¼	38,98
DN50	2050002400-0100	L	Low	G2A G2	44,67
DN50	2050002400-0200	GEAR	Low	G2A G2	45,58
DN50	2050002401-0100	L	High	G2A G2	46,85
DN50	2050002401-0200	GEAR	High	G2A G2	47,76