




**HYDROFRESH 24 CL**

### COMPONENTS INCLUDED

- ※ Single-phase pump
- ※ Expansion tank
- ※ PSG-1 pressure switch
- ※ Pressure Gauge
- ※ Flexible hose
- ※ Brass fitting
- ※ 1.5 metres cable with Schuko plug

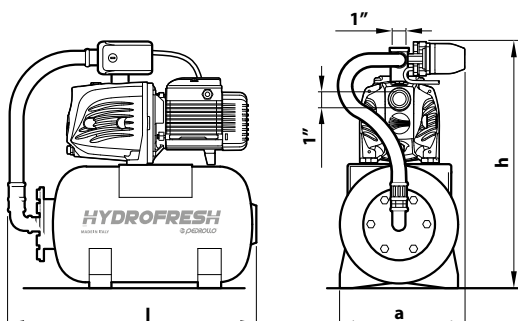

### INSTALLATION AND USE

The **HYDROFRESH** group is designed for residential water supply or irrigation purposes and is available with a **24 litres** or a **60 litres** horizontal expansion tank. This cost-effective, ready-to-use system improves pressurization through two key features:

- an **expansion tank** designed to reduce the number of times the pump needs to turn on and counteract any loss of water pressure that occurs when you open a faucet
- a **pressure switch** that automatically controls the pump operation

| TYPE | POWER (P <sub>2</sub> ) |    | CAPACITY<br>litres | FLOW<br>RATE (1)<br>litres/min | CALIBRATION<br>(2)<br>bar |
|------|-------------------------|----|--------------------|--------------------------------|---------------------------|
|      | kW                      | HP |                    |                                |                           |

#### HYDROFRESH 24 CL

|                                  |      |      |           |     |           |
|----------------------------------|------|------|-----------|-----|-----------|
| FUTURE JETm 1A - <b>24 CL</b>    | 0.55 | 0.75 | <b>24</b> | 90  | 1.2 – 3.2 |
| FUTURE JETm 2C - <b>24 CL</b>    | 0.75 | 1    | <b>24</b> | 110 | 1.2 – 3.2 |
| FUTURE JETm 1A-ST - <b>24 CL</b> | 0.55 | 0.75 | <b>24</b> | 90  | 1.2 – 3.2 |
| FUTURE JETm 2C-ST - <b>24 CL</b> | 0.75 | 1    | <b>24</b> | 110 | 1.2 – 3.2 |

#### HYDROFRESH 60 CL

|                                  |      |      |           |     |           |
|----------------------------------|------|------|-----------|-----|-----------|
| FUTURE JETm 1A - <b>60 CL</b>    | 0.55 | 0.75 | <b>60</b> | 90  | 1.2 – 3.2 |
| FUTURE JETm 2C - <b>60 CL</b>    | 0.75 | 1    | <b>60</b> | 110 | 1.2 – 3.2 |
| FUTURE JETm 1A-ST - <b>60 CL</b> | 0.55 | 0.75 | <b>60</b> | 90  | 1.2 – 3.2 |
| FUTURE JETm 2C-ST - <b>60 CL</b> | 0.75 | 1    | <b>60</b> | 110 | 1.2 – 3.2 |

(1) Maximum flow rate corresponding to the minimum set pressure of the pressure switch

(2) Pressure switch calibration (recommended)

### DIMENSIONS AND WEIGHT

| HYDROFRESH 24 CL                 | DIMENSIONS mm |     |     | WEIGHT<br>kg |
|----------------------------------|---------------|-----|-----|--------------|
|                                  | l             | a   | h   |              |
| FUTURE JETm 1A - <b>24 CL</b>    | 535           | 255 | 520 | <b>18.7</b>  |
| FUTURE JETm 2C - <b>24 CL</b>    |               |     | 530 | <b>22.0</b>  |
| FUTURE JETm 1A-ST - <b>24 CL</b> |               |     | 560 | <b>15.8</b>  |
| FUTURE JETm 2C-ST - <b>24 CL</b> |               |     | 570 | <b>19.2</b>  |

#### HYDROFRESH 60 CL

|                                  |     |     |     |             |
|----------------------------------|-----|-----|-----|-------------|
| FUTURE JETm 1A - <b>60 CL</b>    | 730 | 340 | 657 | <b>23.7</b> |
| FUTURE JETm 2C - <b>60 CL</b>    |     |     | 675 | <b>27.0</b> |
| FUTURE JETm 1A-ST - <b>60 CL</b> | 730 | 340 | 678 | <b>20.8</b> |
| FUTURE JETm 2C-ST - <b>60 CL</b> |     |     | 703 | <b>24.2</b> |