

River Pump

SUBMERSIBLE DRAINAGE PUMPS FOR CLEAR WATER

RIVER Drain T1 GE and T3 GE-pumps are suitable for use with clear water that does not contain abrasive particles.

Pumps are suitable for use in applications such as draining small flooded areas, cellars, garages and for emptying drainage traps.

LVI 4821128 RIVER Drain T1 GE-pump

LVI 4821129 RIVER Drain T3 GE-pump

Max. liquid temperature + 40 °C

Max. submersion depth 3 m

For use with clear water, solids passage max. 10 mm

Continuous service S1

Motor T1 / 0,25 kW 1-phase, T3 / 0,55 kW 1-phase


Flow T1 / 20-160 l/min, T3 20-260 l/min

Head T1 / 1-6 m, T3 1-10 m

Discharge connection 1 1/4" external thread or hose connection

Warranty 2 years

Performance curves RIVER Drain T1 GE and T3 GE

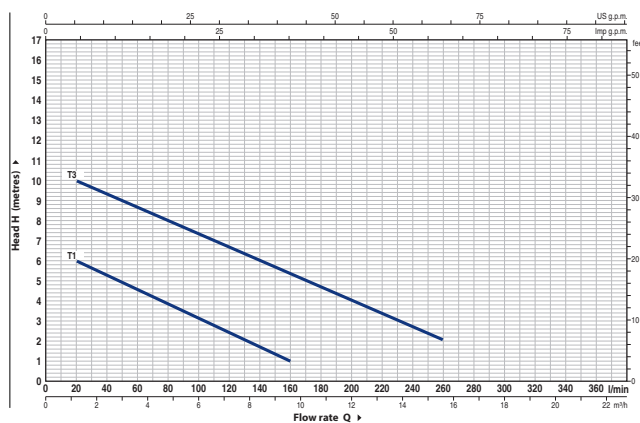

Dimensions RIVER Drain T1 GE and T3 GE

