



ENERG
енергия · ενέργεια




NIBE

NIBE S1156-8



55 °C

35 °C



A+++

A+++



36 dB



dB

■ 7,5
■ **7,5**
■ 7,5
kW

■ 7,5
■ **7,5**
■ 7,5
kW



2019

811/2013




ENERG
енергия · ενέργεια




NIBE

NIBE S1156-8 + VPB S300

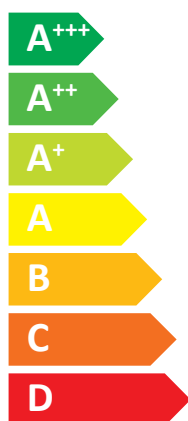

A+++

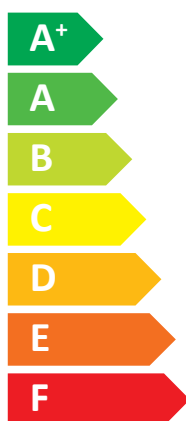

A+



36 dB



dB



■ 7,5 kW
■ **7,5 kW**
■ 7,5 kW

2019

811/2013



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

NIBE

NIBE S1156-8 + VPB S300



A+++



A+



A+++

A++

A+

A

B

C

D


E

F


G

A+++

+



+



+



+



A+++

A++

A+

A

B

C

D

E

F

G

A+

Supplier's name:	NIBE AB		
Model:	NIBE S1156-8 + VPB S300		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A+++	A+++	
Water heating energy efficiency class, average climate:	A+		
Rated heat output, average climate:	7,5	7,5	kW
Annual energy consumption for space heating, average climate	2732	3637	kWh
Annual electricity consumption for water heating, average climate	1318		kWh
Seasonal space heating energy efficiency, average climate:	219	162	%
Water heating energy efficiency, average climate:	127		%
Sound power level LWA indoors	36		dB
Rated heat output, cold climate:	7,5	7,5	kW
Rated heat output, warm climate:	7,5	7,5	kW
Annual energy consumption for space heating, cold climate	3107	4167	kWh
Annual electricity consumption for water heating, cold climate	1318		kWh
Annual energy consumption for space heating, warm climate	1765	2346	kWh
Annual electricity consumption for water heating, warm climate	1318		kWh
Seasonal space heating energy efficiency, cold climate:	230	169	%
Water heating energy efficiency, cold climate:	127		%
Seasonal space heating energy efficiency, warm climate:	219	163	%
Water heating energy efficiency, warm climate:	127		%
Sound power level LWA outdoors			dB

Data for package fiche with SMO or VVM

Controller class	CLASS VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	223	166	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	234	173	%
Seasonal space heating energy efficiency of package, warm climate:	223	167	%

Model(s):				NIBE S1156-8 + VPB S300							
Type of heat source/sink:				Brine/water							
Low-temperature heat pump:				No							
Equipped with supplementary heater:				Yes							
Heat pump combination heater:				Yes							
Climate condition:				Average							
Temperature application:				Medium temperature (55 °C)							
Applied standards: EN14825 - EN16147 - EN12102-1											
Rated heat output			Prated	7,5	kW	Seasonal space heating energy efficiency			ηs	162	%
<i>Declared capacity for part load at outdoor temperature Tj</i>						<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>					
Tj = -7 °C	Pdh	6,6	kW				Tj = -7 °C	COPd	3,25		
Tj = +2 °C	Pdh	4,0	kW				Tj = +2 °C	COPd	4,26		
Tj = +7 °C	Pdh	2,6	kW				Tj = +7 °C	COPd	5,02		
Tj = +12 °C	Pdh	1,8	kW				Tj = +12 °C	COPd	5,40		
Tj = biv	Pdh	7,5	kW				Tj = biv	COPd	3,03		
Tj = TOL	Pdh	7,5	kW				Tj = TOL	COPd	3,03		
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW				Tj = -15 °C (if TOL < -20 °C)	COPd			
Bivalent temperature	Tbiv	-10	°C				Operation limit temperature	TOL	-10	°C	
Cycling interval capacity for heating	Ppsych		kW				Cycling interval efficiency	COPcyc		-	
Degradation co-efficient	Cdh	0,99	-				Heating water operating limit	WTOL	65	°C	
<i>Power consumption in modes other than active mode</i>						<i>Supplementary heater</i>					
Off mode	P _{OFF}	0,003	kW				Rated heat output	P _{sup}	0,0	kW	
Thermostat-off mode	P _{TO}	0,003	kW								
Standby mode	P _{SB}	0,008	kW				Type of energy input	Electric			
Crankcase heater mode	P _{CK}	0,010	kW								
<i>Other items</i>											
Capacity control	Variable						Rated air flow rate, outdoors				m³/h
Sound power level, indoors/outdoors	L _{WA}	36,1/-	dB				Rated water flow rate, indoor heat exchanger				m³/h
Annual energy consumption	Q _{HE}	3637	kWh				Rated brine or water flow rate, outdoor heat exchanger		1,68		m³/h
<i>For heat pump combination heater:</i>											
Declared load profile			XL			Water heating energy efficiency			η _{wh}	127	%
Daily electricity consumption	Q _{elec}	6,250	kWh				Daily fuel consumption	Q _{fuel}		kWh	
Annual electricity consumption	AEC	1318	kWh				Annual fuel consumption	AFC		GJ	
Contact details				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							