


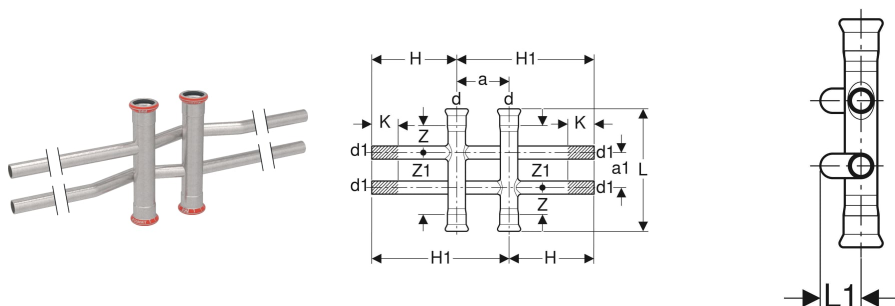

Esimerkkikuva

OMINAISUUDET

- Puristusindikaattori
- Puristamattomana vuotava liitos

- Ulkopuoli sinkitty
- O-rengas mustaa CIIR-kumia
- Muhvipäissä läpikuultava suojatulppa

TEKNISET TIEDOT

Materiaali Seostamaton teräs 1.0034 E195
(EN 10305)

Tuotenro	LV/Inro.	DN	d, ø mm	d1, ø mm	arc °	a cm	a1 cm	L cm	L1 cm	H cm	H1 cm	Z cm	Z1 cm	K cm
22964	0485430	10, 10	12	12	90	6	4	14	1.9	50	56	3.3	7.3	38
22965	0485431	12, 10	15	12	90	6	4	14	2.1	50	56	3	7	38
22966	0485432	12, 12	15	15	90	6	4	14	2.4	50	56	3	7	38
22967	0485433	15, 10	18	12	90	6	4	14	2.2	50	56	3	7	38
22968	0485434	15, 12	18	15	90	6	4	14	2.5	50	56	3	7	38
22969	0485436	20, 10	22	12	90	6	4	14	2.4	50	56	2.9	6.9	38

Tuotenro	LV nro.	DN	d, ø mm	d1, ø mm	arc °	a cm	a1 cm	L cm	L1 cm	H cm	H1 cm	Z cm	Z1 cm	K cm
22970	0485437	20, 12	22	15	90	6	4	14	2.7	50	56	2.9	6.9	38
22971	0485439	25, 10	28	12	90	6	4	14	2.8	50	56	2.7	6.7	38
22972	0485441	25, 12	28	15	90	6	4	14	3	50	56	2.7	6.7	38
22974	0485446	32, 12	35	15	90	6	4	14	3.3	50	56	2.4	6.4	38