


Geberit Silent-PP -supistus, epäkeskeinen



Esimerkkikuva

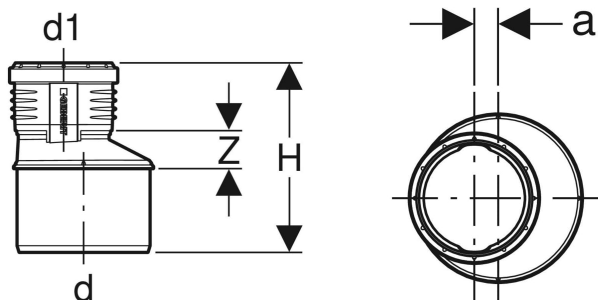

OMINAISUUDET

- Epäkesko
- Äänioptimoitu
- Tiiviste EPDM-kumia

TEKNISET TIEDOT

Asennuslämpötila	-10 – +40 °C
Materiaali	PP-MD
Lämpölaajeneminen	0.08 mm/(m·K)

Tuotenro	LV/nro.	DN	d ₁ mm	d ₂ mm	a cm	H cm	Z cm
390.271.14.1	2409594	50, 40	50	40	0.5	11.4	1.6
390.279.14.1	2409593	50, 30	50	32	0.9	11.3	1.9
390.372.14.1	2409595	70, 50	75	50	1.2	13.3	2.6
390.471.14.1	2409596	90, 40	90	40	2.4	14.6	3.8
390.472.14.1	2409597	90, 50	90	50	1.9	14.6	3.4
390.473.14.1	2409598	90, 70	90	75	0.7	13.9	2.2

<i>Tuotenro</i>	<i>LV/nro.</i>	<i>DN</i>	<i>d, ø</i> <i>mm</i>	<i>d1, ø</i> <i>mm</i>	<i>a</i> <i>cm</i>	<i>H</i> <i>cm</i>	<i>Z</i> <i>cm</i>
390.571.14.1	2409599	100, 40	110	40	3.3	16.4	4.9
390.572.14.1	2409600	100, 50	110	50	2.8	16.4	4.5
390.573.14.1	2409601	100, 70	110	75	1.7	15.7	3.3
390.574.14.1	2409602	100, 90	110	90	1	15.7	2.7
390.675.14.1	2409603	125, 100	125	110	0.7	17.1	2.9
390.775.14.1	2409604	150, 100	160	110	2.3	19.4	4.5
390.776.14.1	2409605	150, 125	160	125	1.7	19.4	4