




Esimerkkikuva

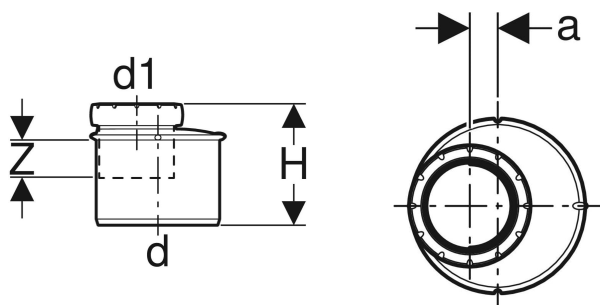

OMINAISUUDET

- Epäkesko
- Erittäin hyvin ääntä eristävä
- Tiiviste EPDM-kumia

TEKNISET TIEDOT

Asennuslämpötila	-10 – +40 °C
Materiaali	PP MX
Lämpölaajeneminen	0.08 mm/(m·K)

Tuotenro	LV/nro.	DN	d, ø mm	d1, ø mm	a cm	H cm	Z cm
393.372.14.1	2409913	70, 50	75	50	0.8	8.4	2.9
393.472.14.1	2409914	90, 50	90	50	1.5	8.8	2.3
393.473.14.1	2409915	90, 70	90	75	0.3	8.9	2.7
393.572.14.1	2409916	100, 50	110	50	2.5	9.5	2.2
393.573.14.1	2409917	100, 70	110	75	1.3	9.6	2.8
393.574.14.1	2409918	100, 90	110	90	0.5	9.8	3.1

Tuotenro	LVJ nro.	DN	d, ø mm	d1, ø mm	a cm	H cm	Z cm
393.674.14.1	2409919	125, 90	125	90	1.2	10.4	2.9
393.675.14.1	2409920	125, 100	125	110	0.2	10.5	3.7
393.775.14.1	2409921	150, 100	160	110	1.9	11.3	3.4
393.776.14.1	2409922	150, 125	160	125	1.1	11.5	3.8