

Quick locking two screws pipe clamp with rubber FTSR



Usage

For fastening:

- Pipe lines to walls, ceilings and floors in the sanitary and heating area.

Description

- Two screws pipe clamp for quick connection .

Advantages / Benefits

- Time saving insertion of the pipes in overhead installation.
- Compact construction for simple insulation of the pipes.
- Locking screw with large combination recessed slot secures against loss.

Examples of use




Installation

Installation tip

- Insert pipe, press together clamp parts, engage locking screw, adjust the pipe and tighten the screw.



Technical data

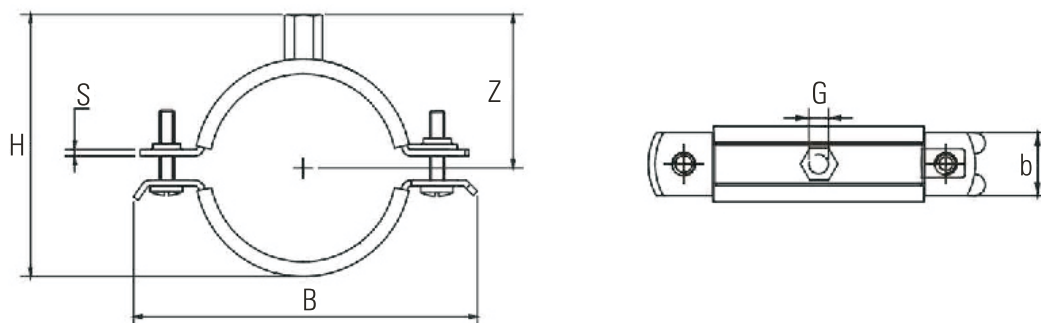

Type	Art-No.	Max.recom. static load(centr.tension) 【kN】	Size 【inch】	Clamping range 【mm】	Locking screw	Thread G	Connecting nut height 【mm】	Width x thickness b x s clamp band 【mm】	Rubber size 【mm】	Width B tolerance ±3 【mm】
FTSR	518238	1.2	3/8", 15-19mm	15-19mm	M6X25	M8	6.8	20×1,5	20×3.8	63
FTSR	518239	1.2	1/2", 21-23mm	21-23mm	M6X25	M8	6.8	20×1,5	20×3.8	67
FTSR	518240	1.2	3/4", 26-28mm	26-28mm	M6X25	M8	6.8	20×1,5	20×3.8	72
FTSR	518241	1.2	1", 32-35mm	32-35mm	M6X25	M8	6.8	20×1,5	20×3.8	78
FTSR	518242	1.2	1-1/4", 40-43mm	40-43mm	M6X25	M8	6.8	20×1,5	20×3.8	87
FTSR	518243	1.2	1-1/2", 48-56mm	48-56mm	M6X25	M8	6.8	20×1,5	20×3.8	98
FTSR	518244	1.2	2", 57-65mm	57-65mm	M6X25	M8/10	17	20×1.5	20×3.8	106
FTSR	518245	1.2	2-1/2", 74-80mm	74-80mm	M6X25	M8/10	17	20×1.5	20×3.8	124
FTSR	518246	1.2	3", 83-91mm	83-91mm	M6X25	M8/10	17	20×1.5	20×3.8	135
FTSR	518247	1.5	4", 108-114mm	108-114mm	M6X30	M8/10	17	23×2.0	23×3.8	162
FTSR	518248	1.5	5", 139-144mm	139-144mm	M6X30	M8/10	17	23×2.0	23×3.8	192
FTSR	518249	1.5	6", 159-169mm	159-169mm	M6X30	M8/10	17	23×2.0	23×3.8	217