
Door & Frame Specification for 72KC Cylindrical Locks

BEST
dormakaba Group

Template Number: K23
Series: 72KC
Backset: 2 3/8"
Strike: Large ANSI strike (S3)
Door Thickness: 1 3/8 - 2"

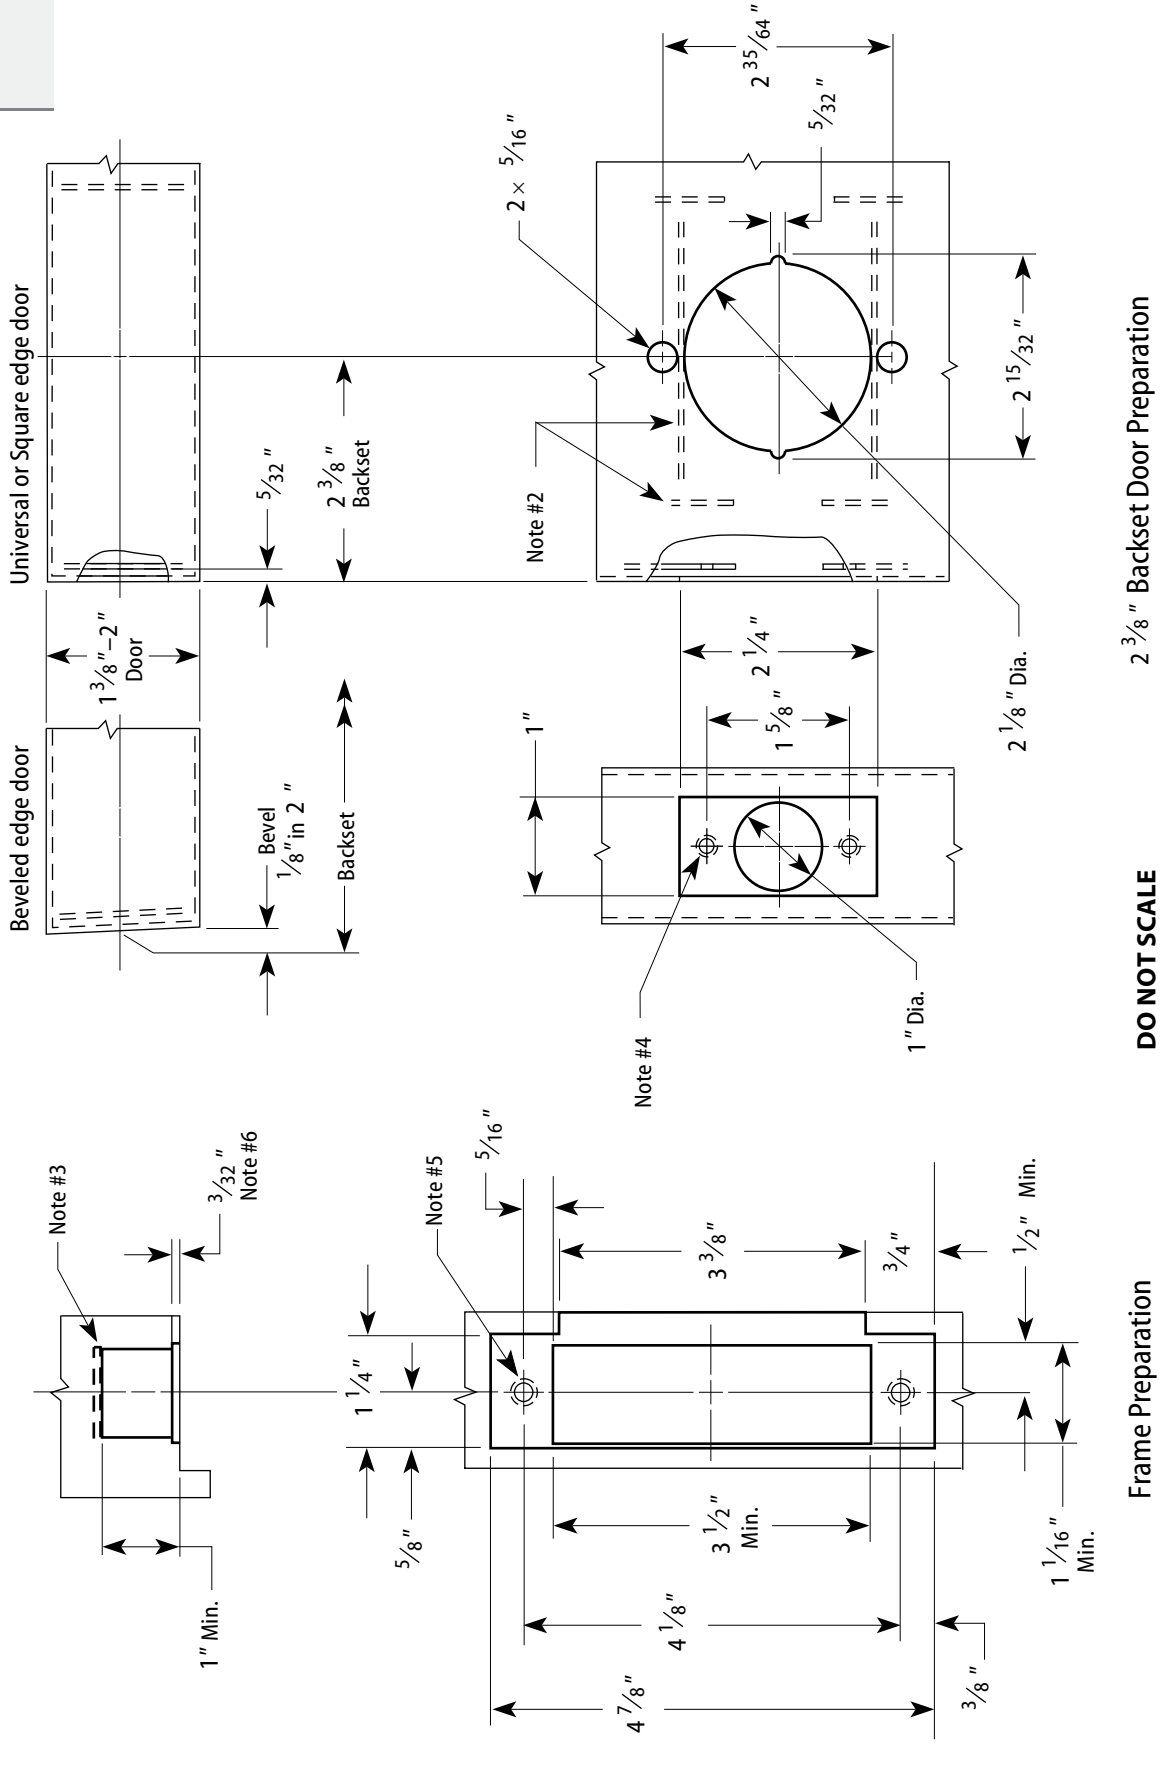

Notes

1 Allow plus tolerance for clearance per ANSI A115.2.
2 Lock and latch case support by door manufacturer.
3 Plaster guard by door manufacturer
4 Prepare for a #8–32 screw.
5 Prepare for a #12–24 screw.
6 When a strike box is used, 9/64".

BEST is a trademark of dormakaba USA Inc. ©2021 All rights reserved.