


RC Touch G2

Touchscreen for automatic door control

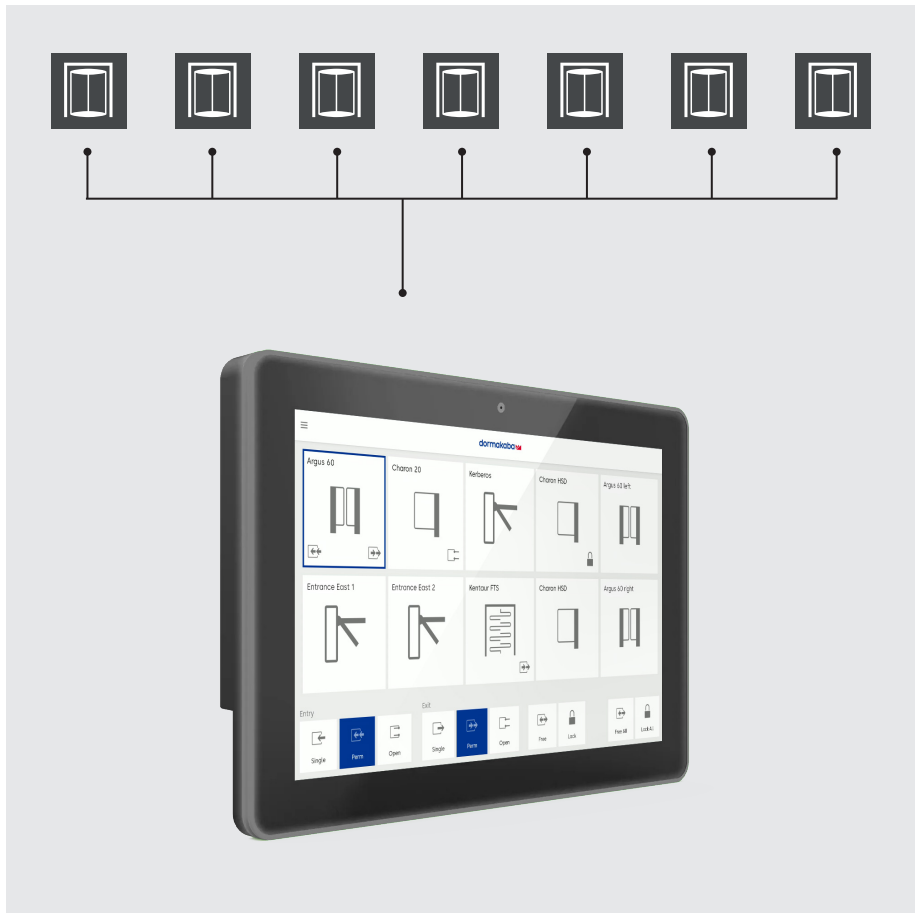

Features

- Controls up to 10 doors or gates
- Automatically detects the door type with corresponding control adjustments
- Type and number of available functions adapt to the connected door
- Open or lock all connected doors with one tap
- Connection via Ethernet or Wi-Fi
- Secure OPC UA communication
- Future-proof with software updates
- VESA 75 mm mounting option
- Includes VESA 75 table stand

RC Touch G2 – Smart control at your fingertips

RC Touch G2 is a 10" touchscreen remote control unit for supervising automatic doors in the nearby vicinity. Up to 10 automated doors or security gates equipped with Connector One / Connector One G2 can be monitored and controlled individually or simultaneously via Ethernet or Wi-Fi.

User-friendly design and adaptable installation

The clear, user-friendly interface makes operation quick and easy, while the stylish, modern monitor fits seamlessly in reception areas. Choose between a fixed wall installation or a flexible stand for added convenience.

Supported door types

Tripod turnstiles	Kerberos TPB
Turnstiles	Charon HTS, Kentaur FTS
Swing doors	Charon HSD, Kentaur FGE-Mxx
Sensor barriers	Argus HSB, Argus 40/60/80, Argus V60
Revolving doors	Geryon SRD
Security interlocks	Orthos PIL-M02
Swing door operators	ED 100/250
Sliding door operators	ES PROLINE

Technical data



RC Touch G2

RC Touch G2

Screen size	10.1" LCD touchscreen (16:10)
Resolution	1280 x 800
Brightness	280 cd/m²
Touch technology	PCAP
Dimensions	259.4 mm x 178.4 mm x 28 mm
Weight	927 g without table stand
Power supply	12 V DC / 1.5 A
Operating temperature	0°C to 40°C
Connectivity	Ethernet, WiFi (802.11a/b/g/n/ac)
Other interfaces	USB, SD card
Communication protocol	OPC UA



Ethernet or
Wi-Fi



Connector One G2



Security gate
e.g. Argus

Any questions? We would be happy to answer any questions you may have.