


Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. a) The catchment area of a basin is approximated as a semicircle of radius 'r' km with respect to the coordinate axis set up with its origin at the centre of circle and the x-axis coincident with the diameter. The area lies in the first and second quadrants and the position coordinates of the rain gauge stations are (0,0), $(\frac{r}{2}, \frac{r}{2})$ and $(-\frac{r}{2}, \frac{r}{2})$ km. Show that the Thiessen Weights are given by $\frac{0.5}{\pi}$, $(0.5, -\frac{0.25}{\pi})$ and $(0.5, -\frac{0.25}{\pi})$. [10]

- b) Route the flood hydrograph through a river reach for which Muskingum coefficient $K = 8h$ and $X = 0.25$. [6]

Time (hr)	0	6	12	18	24	30	36	42
Inflow (m^3/s)	7	13	30	35	28	21	14	9

2. a) The infiltration rates observed during a test on a double ring infiltrometer are as given below. Determine the constant f_0 , f_c and K of the Horton's equation which fits the above data. [10]

T (hrs)	0.04	0.13	0.33	0.75	1.50	2.50	3.50	4.50	5.50
f (cm/hr)	0.78	0.75	0.66	0.54	0.37	0.26	0.22	0.22	0.21

- b) Briefly describe the methodology of estimating evapotranspiration using Penman's equation and Lysimeter method. [3+3]
3. a) Describe briefly backwater effects and unsteady flow effect on a rating curve. [5]
- b) With the following data, compute the discharge for a river. Calibrated values of constants for current meter: $a = 0.51$ and $b = 0.03$. [11]

Distance from left bank (m)	0	1	3	5	7	9	11	12
Depth (m)	-	1	2	2.5	2	1.5	1	-
Revolution at 0.6d	-	40	60	110	90	50	30	-
Time (sec)	-	100	100	150	150	100	100	-

4. a) Differentiate between baseflow and direct runoff. What are limitations of unit hydrograph? [3+2]
- b) The ordinates of a 3 hr unit hydrograph of a catchment is given below

T (hr)	0	3	6	9	12	15	18	21	24	27	30	33	36	39	42
3 hr UH ordinates (m^3/s)	0	25	50	85	125	160	185	160	110	60	36	25	16	8	0

Derive the flood hydrograph in the catchment due to the storm given below.

Time from start of storm (hr)	0	3	6	9
Accumulated rainfall (cm)	0	4	12	17

The storm loss rate Φ -index for catchment is estimated as 0.25 cm/hr. The baseflow can be 15 m³/s at the beginning and increases by 2.0 m³/s for every 12 hours till the end of the direct-runoff hydrograph.

[11]

5. a) For the river estimate the peak flood for 500 years return period if the 100 years and 50 years return period flood was 1020 m³/s and 850 m³/s respectively using Gumble's method having large sample data.

[6]

- b) A catchment of 85 ha has slope of 0.006 and the maximum length of water travel 950m, if the maximum depth of rainfall with 25 year return period has following data. Calculate the peak flow for 25 years return period using rational method taking runoff coefficient of 0.3.

[6]

Duration (minute)	5	10	20	30
Depth of rainfall (mm)	17	26	40	50

- c) An analysis of an annual flood series covering the period 1920 to 2020 (100 years) on a certain river shows that the 100-year flood has a magnitude of 640,000 m³/s and 2 years has magnitude of 225,000 m³/s. Assume the annual flood fits with the Gumbel distribution. What is the probability of having 575,000 m³/s flood or a greater flood in coming 25 years?

[4]

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III/ I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt **All** questions.
- ✓ The figures in the margin indicate **Full Marks**.
- ✓ Assume suitable data if necessary.



1. a) Explain briefly humankind's interference in various parts of hydrological cycle. [3]
 b) What are the causes of inconsistencies in the rainfall data at a station? How do you find whether the rainfall data is consistent or inconsistent using double mass curve analysis? [3+3]
 c) Explain the procedure of deriving Clark UH. [6]
2. a) An isolated storm in a catchment produced a runoff of 3.5cm. The mass curve of the average rainfall depth over the catchment was as below. Calculate the ϕ -index for the storm. [6]

Time from beginning of storm (hr)	0	1	2	3	4	5	6
Accumulated average rainfall (cm)	0	0.5	1.65	3.55	5.65	6.8	7.75

- b) Derive an expression for estimation of evaporation in a lake by the energy balance method. [5]
- c) Justify the statement "Hydrological losses are not actual losses". Briefly describe factors influencing evaporation. [2+3]
3. a) During a flood flow, the depth of water in a 10 m wide rectangular channel was found to be 3.0 m and 2.7 m at two sections 200 m apart. The drop in the water surface elevation was found to be 0.12 m. Assuming Manning's coefficient to be 0.025, estimate the flood discharge through the channel. Assume no eddy loss. For the application of the hydraulic formulae for stream flow computation, what are the parameters that need to be measured in the channel? [3+8]
 b) List out the steps how to develop rating curve of hydrological station. [4]
4. a) What is unit hydrograph (UH)? How do you prepare UH for multiple storm? [2+4]
 b) Calculate the flood discharge from the outlet of the catchment if the total rainfall of 5.2 cm occurred at an interval of 6 hours using following 2 UH. Assume Base Flow = 15 cumes and infiltration index of 0.2 cm/hr. [12]

Time (hr)	0	2	4	6	8	10	12	14	16	18	20	22
2hr-UH(cumes)	0	30	55	90	130	170	180	110	60	35	20	0


5. a) If the annual flood series data for a catchment is available for N consecutive years, explain a procedure to determine a flood discharge with a return period of T, (where $T > N$), by using log-normal distribution. [6]
 b) Analysis of the annual flood peak of river of 21 years yielded a mean of $8520 \text{ m}^3/\text{s}$ and standard deviation of $3900 \text{ m}^3/\text{s}$. A proposed water control project on this river is to have an expected life of 40 years. The acceptable reliability by the design policy is 85%. Gumbel's Method recommend the flood discharge for this project. Take $y_n = 0.5252$ and $S_n = 1.0696$ for 21 years. [6]
 c) Define the terms return period, frequency and risk. [1+1+2]

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2082 Baishakh

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.




1. Define hydrology. Why hydrology is considered important in case of water resources engineering? [1+3]
2. a) Explain different methods of determining the average rainfall over an area due to a storm. Discuss the relative merits and demerits of various methods. [2+4]
- b) An isohyet drawn in the catchment of Bagmati river basin with catchment area of 442 sq. km has following data. Calculate the average rainfall for the basin. [4]

SN	Range of isohyet (cm)	Area enclosed by isohyet (Sq. km)
1	17-13	125
2	13-9	117
3	9-5	108
4	5-1	92

3. a) Briefly describe the types of evaporimeters with neat sketches. [6]
- b) Calculate the potential evapotranspiration for an area over Dang in the month of May by Penman's method using following data: Latitude = 26°N; Mean temperature = 10°C; Mean relative humidity = 65%; Mean monthly solar radiation at the top of atmosphere = 15.88 mm of evaporable water/day; Wind velocity at 2m height = 5 km/day; Psychrometric constant = 0.49 mm/°C; Mean sunshine hour = 10.1hr; Potential sunshine hours = 13.5hr; Reflection coefficient = 0.25; Slope of saturated vapor pressure at 10°C = 1.24 mm of Hg. [8]
4. a) Define stream gauging. What factor should be considered in selecting a site for a stream gauging station? [2+2]
- b) Discharge measured at Nakhu Khola using current meter has following data. Calculate the total discharge of river. [6]

Distance from left bank (m)	Depth (m)	Velocity (m/s)	
		At 0.2d	At 0.8d
0	-	-	-
1.5	1.3	0.6	0.4
3.0	2.5	0.9	0.6
5.0	1.7	0.7	0.5
6.0	1.0	0.6	0.4
7.5	0.4	0.4	0.3
9.0	-	-	-

5. a) Point out the applications and limitations of hydrograph theory. [3+3]
- b) A 2-hr unit hydrograph is shown in the figure below: [2+3+1+6]
- Determine the catchment area of the basin.
 - Determine the resulting flood hydrograph for a net rainfall of 1.5 cm/hr for the duration of 2 hr if the constant base flow is 2 cumecs.
 - What will be the time of concentration for the basin?
 - Two different storms, with rainfall of 0.47 cm/hr and 0.64 cm/hr occur for 1 hour. If the $\phi = 0.12$ cm/hr for the basin, what will be the peak discharge for the resulting flood hydrograph?

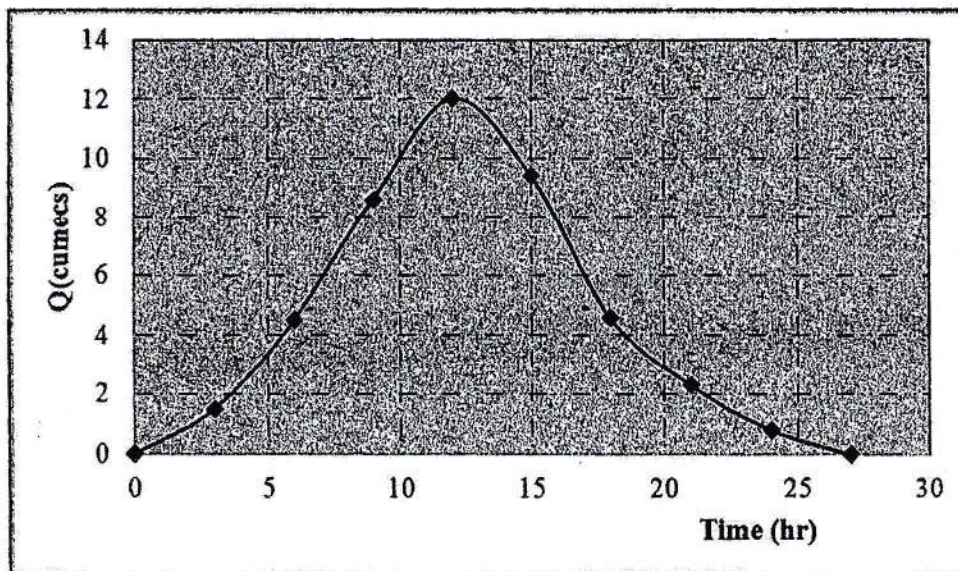

6. a) What are the different methods of flood prediction? [4]
- b) Using 30 years data and Gumbel's method, the flood magnitude for return period of 100 and 50 years for a river are found to be 1200 and 1060 m^3/s respectively. [4+2+2]
- Determine the mean and standard deviation of the data used. Take values of reduced mean and reduced standard deviation in Gumbel's extreme value distribution for $n = 30$ as 0.5362 and 1.1124.
 - Estimate the magnitude of the flood with a return period of 500 years.
 - What are the 95% confidence limits for this estimate if $f(95\%) = 1.96$.
7. a) What is flood routing? Explain about Clark IUH method of flood routing. [4]
- b) The storage in the reach of a stream has been studied. The values of x and k in Muskingum equation have been identified as 0.28 and 38.4 hr. If the inflow hydrograph to reach is as given below, compute the outflow hydrograph. Assume the outflow from the reach at $t = 0$ is $35 \text{ m}^3/\text{s}$. [8]


Time (hr)	0	6	12	18	24	30
Inflow (m^3/s)	35	55	92	130	160	140

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2081 Bhadra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. Define hydrological cycle. Draw a net sketch of hydrological cycle illustrating its components. [1+3]
2. a) Differentiate Arithmetic Mean, Thiessen Polygon and Isohyetal Methods. [5]
- b) The mass curve of the rainfall of 100 min duration is given below. If the catchment had an initial loss of 0.6cm and ϕ -index of 0.6cm/hr, calculate the total surface runoff from the catchmen. [6]

Time from start of rainfall (min)	0	20	40	60	80	100
Cumulative rainfall (cm)	0	0.5	1.2	2.6	3.3	3.5

3. a) Differentiate AET and PET. Explain the method of measurement of evapotranspiration in field with sketch. [2+2]
- b) Describe types of infiltrometers with sketch. How the data of infiltrometer are used to derive the Horton's constant? Explain with assumed data. [3+5]
4. a) What is rating curve? Explain with sketch how would you determine stage for zero discharge. [2+6]
- b) The data pertaining to a storm gauging operation at a gauging site are given below. The rating equation of the current meter is $v = (0.32N + 0.032)$ m/s where N is revolution per second, Calculate the discharge in the stream. [8]

Distance from right bank (m)	Depth (m)	Revolution of CM at 0.6d	Time (s)
0	0	0	0
2	0.5	80	180
4	1.1	83	120
6	1.95	131	120
9	2.25	139	120
12	1.85	212	120
15	1.75	114	120
18	1.65	109	120
20	1.5	92	120
22	1.25	85	120
23	0.75	70	150
24	0	0	0

5. a) What is unit hydrograph? How do you prepare the unit hydrograph for multiple storm of same duration? [2+4]

- b) The ordinates of 6 h-UH of a basin are given as under. Derive the storm hydrograph due to a 3hr storm with a total rainfall of 4cm, ϕ -index of 0.5cm/hr and base flow of $2 \text{ m}^3/\text{s}$. [9]

Time (hr)	0	6	12	18	24	30	36	42	48
Ordinate m^3/s	0	8	14	28	16	10	6	4	0

6. a) What return period will you adopt in the design of a bridge on a river if you are allowed to accept only 5% risk of flooding in the 25 years of expected life of the bridge? [4]

- b) 30 years flood data of Kamalamai River has been used for frequency analysis and after fitting the Gumbel distribution the 100-year and 50-year floods are predicted equal to $1200 \text{ m}^3/\text{s}$ and $1060 \text{ m}^3/\text{s}$ respectively. Calculate the magnitude of flood for 500 years return period if reduced mean and reduced standard deviation in Gumbel's distribution for available data series are 0.5362 and 1.1124 respectively. Also Calculate 80% confidence limit of 500-year flood if $f(c)$ for 80% is 1.28. [8]

7. a) Explain the concept of attenuation and lag of peak due to routing with sketch. [2]


- b) Route the flood hydrograph through a river reach for which Muskingum coefficient $K = 8 \text{ h}$ and $X = 0.25$. Initial outflow discharge from the reach is $8.0 \text{ m}^3/\text{s}$. [8]

Time (hour)	0	6	12	18	24	30	36	42
Inflow (m^3/s)	8	16	30	30	25	20	15	10

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. Describe Hydrological cycle. Discuss about the uses of Engineering Hydrology. [2+2]
2. a) What are the different method for the presentation of rainfall data? Explain any two methods. [4]
- b) Following are the data of a storm as recorded in a tipping bucket located at Lumle (Lat: 28.3°, Long: 83.8°) for 1.5 hours: [4+6]

Time from beginning of storm (minute)	10	20	30	40	50	60	70	80	90
Cumulative rainfall(mm)	1.6	6.6	13.8	20.2	24.2	38.4	46.8	49.4	50.8

- (i) Plot the hyetograph of the storm.
- (ii) Plot the maximum intensity duration curve of the storm.
3. a) Describe Penman's methods to estimate daily PET. [5]
- b) In a 120 minute storm the rates of rainfall observed in successive 20 minute interval are 5,8,15,12,9 and 2 mm/hr. Assuming the ϕ -index value as 2.5 mm/hr and an initial loss of 0.5mm, determine the total rainfall, net runoff and w-index of the storm. [1+2+5]
4. a) Find the drainage density, average length of overland flow, form factor and channel slope for a basin with the following data: Area of Basin (A) = 140 sq. km, Distance between the outlet to the farthest point (L) = 21km, elevation difference between the outlet and the farthest point (h) = 1090m and total length of the channels of all order (Ls) = 654 km. [4]
- b) Define Rating Curve and explain the use of Rating Curve. [3]
- c) Following data is the discharge measurement of Jhiku khola using stream gauging, compute the discharge of Jhiku khola. [8]

Distance from left bank (m)	Depth (m)	Velocity (m/s)	
		At 0.2d	At 0.8d
0	-	-	-
1.5	1.1	0.7	0.42
3.0	2.7	0.85	0.63
5.0	1.9	0.75	0.54
7.5	0.9	0.65	0.46
10.0	0.5	0.45	0.35
12.5	-	-	-

5. The ordinate of 4-Hr UH are given:

[14]

Time (hr)	0	2	4	6	8	10	12	14	16	18	20	22	24
Ordinate of UH (m^3/s)	0	30	100	150	200	160	120	80	40	30	20	6	0

A catchment has rainfall of 3.2, 3.0 and 5.0 cm in three consecutive two hours period. Assuming an average ϕ index of 1.25 cm/hr. and base flow of river is $40\text{m}^3/\text{s}$, determine the flood hydrograph of the catchment.

6. a) Prove that for a large sample as per Gumbel's distribution, the mean annual flood will have a return period of 2.33 years.

[4]

- b) From the analysis of available data on annual flood peaks of a small stream for a period of 35 years, 50 years and 100 years flood have been estimated to be $660\text{ m}^3/\text{s}$ and $740\text{m}^3/\text{s}$. Using Gumbel's method, estimate the 200 years flood for the stream. (Take $Y_n = 0.54034$ and $S_n = 1.12843$ for $n=35$ years)

[8]

7. A drainage basin has the following characteristics

[8]

Area = 180 km^2

Storage constant = 10hrs

Time of concentration = 8 hours

The inter isochrones area distribution are as follows


Travel time (hr)	0-1	1-2	2-3	3-4	4-5	5-6	6-7	7-8
Inter isochrones area (km^2)	14	38	28	36	30	20	10	6

Determine the instantaneous unit hydrograph (IUH) for this catchment.

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Please provide normal graph.
- ✓ Assume suitable data if necessary.



1. Explain water balance equation through hydrological cycle. [4]
2. a) Describe the procedure of estimation of mean rainfall over an area using Thiessen Mean Method. [4]
- b) Annual Precipitation of station X and average of the 15 surrounding stations are listed below. Examine the consistency of the station X. In which year, the change in regime observed? Make adjustments in the rainfall data wherever applicable. [8]

Year	2022	2021	2020	2019	2018	2017	2016	2015	2014	2013
Rainfall at station X (mm)	173	290	225	246	260	493	320	305	340	437
Average Rainfall at surrounding stations (mm)	234	333	236	251	284	361	282	240	265	302

3. a) How the infiltration of soil can be measured by laboratory method? Elaborate Horton's equation with neat sketch. [4+3]
- b) The mass curve of an isolated storm in a 500-ha watershed is as follows: [7]


Time from start (hr)	0	2	4	6	8	10	12	14	16	18
Cumulative rainfall (cm)	0	0.8	2.6	2.8	4.1	7.3	10.8	11.8	12.4	12.6

If the direct runoff produced by the storm is measured at the outlet of the watershed as 0.340 Mm^3 , estimate the ϕ - index of the storm and duration of the rainfall excess.

4. a) Calculate the flow discharge of a river from the following data using area velocity method using Mid sectional area. [8]

Distance from bank (m)	0	1.5	3.0	4.5	6.0	7.5	9.0
Depth of flow (m)	0	0.75	2.50	3.50	2.30	0.80	0
Velocity 0.2 depth	-	-	0.65	0.90	0.50	-	-
Velocity 0.6 depth	0	0.35	-	-	-	0.30	0
Velocity 0.8 depth	-	-	0.25	0.40	0.20	-	-

- b) Establish relationship between rainfall and resulting runoff for a large catchment. Point out the factor affecting runoff from a basin. [3+3]
5. a) From the given hydrograph below, answer the questions: [6]
 - (i) What is the total amount of rainfall and average rainfall intensity?
 - (ii) What is basin lag time and time of concentration?
 - (iii) What is the total time base of flow?

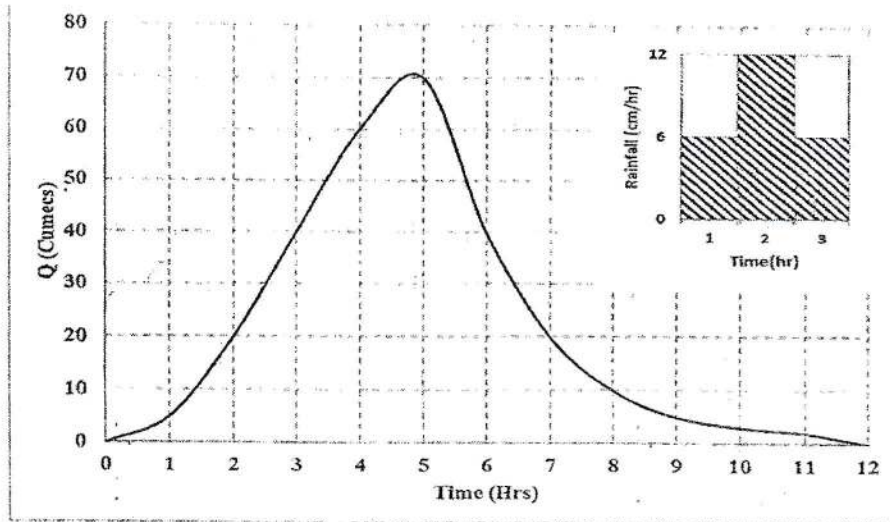

- b) Following are the ordinates of hydrograph from a catchment area of 770 km² due to 6-hr rainfall. Derive the ordinates of flood hydrograph due to 3.3 cm and 5.5 cm effective rainfall of duration 6-hr.

[8]

Time (hr)	0	6	12	18	24	30	36	42	48	54	60	66	72
Discharge (m ³ /s)	40	65	215	360	400	350	270	205	145	100	70	50	40

Make suitable assumptions regarding the base flow.

6. a) A catchment area has the time of concentration of 20 minutes and an area of 20 ha. Estimate the peak discharge corresponding to 25 years return period. Take runoff coefficient of 0.25. The intensity duration frequency curve for the storm can be expressed in cm/h by:

$$i = KT^x / (D+a)^n. \text{ Take } K = 6.93, x = 0.189, a = 0.50 \text{ and } n = 0.878.$$

[5]

- b) A hydraulic structure has been designed for a discharge of 350 m³/s. From the 25 years annual flood series data, the mean and standard deviation are 140 and 65 m³/s respectively. Calculate the return period for the design flood by using Gumbel's method. Take reduced mean variate and reduced standard deviation for this series as 0.5299 and 1.0876 respectively.

[6]

- c) Discuss application of probability plots with figure.

[3]

7. The inflow hydrograph readings for a stream reach are given below for which the Muskingum coefficients of $K = 36$ hr and $x = 0.15$. Route the flood through the reach and determine the outflow hydrograph. Also, determine the reduction in peak and the time of peak of outflow. Outflow at the beginning of the flood may be taken as the same as inflow.

[8]

Time (hr)	0	12	24	36	48	60	72	84	96	108	120
Inflow (cumec)	42	45	88	272	342	288	240	198	162	133	110

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2080 Baishakh

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. As a civil Engineer how do you justify the need and importance of Engineering Hydrology for the design of Bridge? [4]

2. a) Explain a procedure for checking a rainfall data for consistency. [4]

- b) Calculate the maximum intensity of rainfall for 1hr, 3 hr and 5 hr with following data. [8]

Duration	7 am	8 am	9 am	10 am	11 am	12 am	1 am	2 am	3 am	4 am	5 am	6 am	7 am	8 am
Rainfall(mm)	10	8	6	12	5	0	2	5	8	12	7	6	0	0

3. a) Derive the expression for potential evapotranspiration using Penman's method. [6]

- b) Following data represents the temporal distribution of rainfall in Bagmati Basin for the duration of 8 hrs. If surface runoff generated by the rainfall is 11.6 cm calculate the infiltration index. Assume no initial losses. [6]

Duration (hr)	1	2	3	4	5	6	7	8
Rainfall per hr (cm)	0.8	1.8	3	4.6	3.6	3.2	2	1

4. a) Write the equation of rating curve and explain it with figure. How daily discharge hydrograph is obtained from daily stage hydrograph? [6]

- b) Calculate the flood discharge of Marin River at Kusuntar by slope area method using following data: [8]

	Upstream	Downstream
Flow area	175 m ²	224 m ²
Wetted Perimeter	75 m	166 m

Reach Length = 120 m

Fall in water surface elevation = 1.46 m

Manning's Coefficient = 0.1

5. a) What is Unit Hydrograph? What are its assumptions and limitations? Describe the method of base flow separation. [1+3+2]

- b) Derive 2-hrs hydrograph from following 4 hrs unit hydrograph using s-curve method: [8]

Time (hr)	0	2	4	6	8	10	12	14	16	18	20	22	24
Ordinates of 4 hr UH	0	12.5	62.5	130	175	180	140	90	50	25	13	3	0

6. a) The observed annual peak flood for Lothar River from 1989 to 2009 are as follows: [10]

Year	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998
Peak Discharge(m^3/s)	419	320	65	150	1170	392	86	74.7	219	142
Year	1999	2000	2001	2002	2003	2004	2005	2007	2008	2009
Peak Discharge(m^3/s)	787	245	539	69.2	245	293	58.5	77.4	67.2	208

Find the flood value with return period of 30 years using Gumbel's Method. [Use Reduced Mean = 0.5236 and Reduced Standard Variation = 1.0628 for sample size of 20]. What is the return period of peak flood occurred on 1989?

- b) Describe Rational Method for estimation of flood, its assumptions and Limitations. [5]
7. a) What is flow routing ? Explain its importance. [3]
- b) Route the following flood hydrograph at Chovar of Bagmati River using Muskingum method having coefficient $k = 10$ hr and $x = 0.2$. Following is the inflow hydrograph with outflow of Chovar at the start is $60m^3/s$. [7]

t(hr)	0	6	12	18	24	30	36	42	48	54	60
Inflow(m^3/s)	60	120	480	660	460	260	160	100	90	60	40

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2079 Bhadra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. Discuss water balance and water budget analysis in hydrology. [4]

2. a) A catchment has six rain gauge stations. In a year, the annual rainfall in cm recorded by the gauges are as follows: 240, 252.2, 228.3, 218.6, 275.3, 212.2. For a 10% error in the estimation of the mean rainfall, calculate the optimum number of stations in the catchment. [4]

b) Explain briefly the following relationships relating to the precipitation over a basin.
(i) Depth-Area Duration Curves (ii) Intensity-Duration Frequency Relationship. [3+3]

3. a) What are the advantages of double ring infiltrometer over single ring infiltrometer. [4]

b) Determine ϕ -index for a watershed with catchment area of 0.8 km^2 if temporal distribution of rainfall at different time duration are as the following table. Take surface runoff as $92,800 \text{ m}^3$. [6]

Duration (hr)	1	2	3	4	5	6	7	8
Incremental rainfall (cm)	0.8	1.8	3.0	4.6	3.6	3.2	2.0	1.0

4. a) Write about the methods practiced in Nepal for estimating runoff from ungauged basins. [4]

b) The following data is observed on a stream using current meter. The rating equation of current meter is $V = (0.05 + 0.3N) \text{ m/s}$, where N is rev/sec was used to measured the velocity at 0.6 d depth. Calculate the discharge of the stream. [8]

Distance from bank (m)	0.8	1.6	2.4	3.0	3.6	4.2	5.0	5.8	6.6
Depth (m)	0.5	1.0	1.6	2.0	2.0	1.8	1.2	0.6	0.0
No. of rev.	12	23	27	33	32	28	24	14	-
Time (sec)	48	52	54	58	58	53	50	45	-

5. a) The ordinates of 6-h UH of a basin are given as under.

Time h	0	6	12	18	24	30	36	42	48
Ordinates m^3/s	0	6	12	25	10	8	6	3	0

Derive the storm hydrograph due to a 3-h storm with a total rainfall of 15 cm . Assume initial loss of 0.50 cm and Φ -index of 1 cm/h . Take base flow of $4 \text{ m}^3/\text{s}$. [8]

b) Explain the concept of the unit hydrograph. What are the assumptions and limitations of unit hydrograph theory? [2+4]

6. a) Analysis of the annual flood peak data of a certain river covering the period of 25 years has the mean of 8520 and standard deviation of 3900 m³/s. The proposed water control project near this site has an expected life of 45 years. The policy decision for project provides the reliability of 85%.

[4+2]

(i) Using Gumbel's method recommend peak discharge. Take $y_n = 0.5309$ and $S_n = 1.0915$

(ii) Calculate the design discharge if factor of safety is 1.3 and also the corresponding safety margin.

- b) A rainfall storm for the duration of 20 mins, 40 mins and 80 mins are 40 mm, 70 mm, 90 mm and 100 mm respectively. If the slope of the catchment is 0.01, runoff coefficient is 0.7, maximum length of the travel is 1,100 m and catchment area is 3 km², estimate the peak flow by rational method.

[6]

7. a) Explain briefly the basic principles involved in the development of IUH by Clark's method.

[6]

- b) A drainage basin has area of 157 km², storage constant = 8h and time of concentration = 7h has the following inter isochrone area distribution data.

Time h	0-1	1-2	2-3	3-4	4-5	5-6	6-7
Inter isochrone area km ²	10	38	20	45	32	10	2

Route the flood hydrograph.

[6]

- c) Why flow routing is required? Explain Time-Area method of Routing.


[6]

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2078 Kartik

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. Explain the hydrologic cycle in nature with the help of a neat sketch. [4]
2. Discuss three different methods of determining the average depth of rainfall over a catchment. [6]
3. Following are the rain gauge observations during a storm. Construct mass curve of precipitation, hyetograph and maximum depth-duration curve. [6]

Time since commencement of storm(min)	Accumulated rainfall (cm)
5	0.1
10	0.2
15	0.8
20	1.5
25	1.8
30	2.0
35	2.5
40	2.7
45	2.9
50	3.1

4. Discuss briefly methods used to estimate evaporation from a lake. [6]
5. Following are the monthly pan evaporation data (Jan-Dec) near Kathmandu in a certain year in cm. 16.7, 14.3, 17.8, 25.0, 28.6, 21.4, 16.7, 16.7, 21.4, 16.7, 16.7. The water spread area in a lake nearby in the beginning of January in that year was 2.80 km² and at the end of December it was measured as 2.55 km². Calculate the loss of water due to evaporation in that year. Assume a pan coefficient of 0.7. [6]
6. For ungauged basins, how would you determine the monthly flow from rainfall? Explain any two methods. [8]
7. The high flow water surface elevations of a stream at two section 10 km apart are 306.920 m and 306.650 m. The cross-sectional area and wetted perimeters are as follows:

Section	Area (m ²)	Wetted perimeter (m)
A	73.3	26.80
B	93.4	30.23

- Assume $n = 0.02$. The eddy loss coefficient is 0.30 for gradual expansion and 0.10 for gradual contraction. Estimate the discharge at the stream. Section A is upstream of B. [8]
8. Define flood hydrograph, Direct Run of Hydrograph (DRH) and Unit Hydrograph. Write the different methods of base flow separation in hydrograph analysis. [8]

9. The ordinates of a 2-h UH are given below. Derive the ordinates of a 3-h UH by S-curve method. [6]

Time (hr)	0	2	4	6	8	10	12
Ordinates of 2-h UH	0	12	48	78	114	72	54

10. Write the equations of flood prediction by rational and empirical methods. Also write the limitations and appropriate uses of these equations. [6]
11. For a river the estimated flood peaks for two return periods by the use of Gumbel's method are given below:

Return period (yrs)	Peak flood (m^3/s)
100	1020
50	850

What flood discharge in this river will have a return period of 500 yrs? [8]

12. A drainage basin has the following characteristics: Area = 120 km^2 , time of concentration = 14 h, storage constant = 10 h and inter-isochrone area distribution as below:

Travel time (hr)	0-2	2-4	4-6	6-8	8-10	10-12	12-14	14-16	16-18
Inter-isochrone area (km^2)	3	10	20	26	18	18	13	8	4

Compute the flood hydrograph by using Clark's method. [8]

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2078 Bhadra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Graph paper will be provided.
- ✓ Assume suitable data if necessary.



1. What is a hydrologic cycle? Why do we need to study hydrologic cycle and water budget equation? [1+3]
2. a) What are common causes of inconsistencies in rainfall data? Please demonstrate applications of mass curves with appropriate illustrative examples. [3+3]
- b) Mean and standard deviations of annual rainfall estimated based on seven stations in a catchment are 143 mm and 31.6 mm, respectively. For a 7% error in the estimation of mean rainfall, do we need additional rain gauges in the catchment? If yes, what are the minimum numbers of additional rain gauges required to be established in the watershed. [5]
3. a) A reservoir of a hydropower project has a surface area of 2 km². Estimate volume of water evaporated from the reservoir in March (30 days), if temperature = 25°C, relative humidity = 70%, wind speed at 2m above the ground surface is 12 km/h, and saturation vapor pressure at 25°C is 23.76 mm of Hg. Take Meyer's coefficient as 0.36. [5]
- b) Daily (24-hrs) rainfall observed over a catchment of 1 km² is 10 cm. A Horton's curve with a coefficient (K) of 0.5 hr⁻¹ indicated an initial and final infiltration capacities of 0.8 cm/hr and 0.3 cm/hr, respectively. If an evaporation pan (pan coefficient = 0.7) installed in the catchment indicated 0.5 cm drop in the water level during the 24 hours of its operation, determine runoff from the catchment. [5]
4. a) During a flood flow the cross section of area of a river were measured as 60 m² for u/s and 45 m² for d/s at two sections 6 km apart. Wetted perimeters of these sections were 18 m and 14 m respectively. Elevation difference between u/s and d/s bed of the river was 0.45m. Estimate the flood discharge of the river. Take Manning's rugosity coefficient = 0.025 and eddy loss coefficient = 0.15. [8]
- b) Explain the methods practiced in Nepal for the estimation of runoff from an ungauged basin. [6]
5. a) Discuss how different factors affect flood hydrograph. What are various methods for baseflow separation? [3+3]
- b) Observed streamflow in a catchment (Area = 600 km²) from a storm event of 4 hours' duration tabulated hereunder. If baseflow is 10 m³/s, derive 4 hr unit hydrograph. [8]

Time(hr)	0	4	8	12	16	20	24	28	32	36	40	44	48
Observed flow (m ³ /s)	10	100	230	190	130	100	70	60	50	30	20	15	10

6. a) Using given data for annual discharge in a section of a river from year 2000 to 2009. [6+4]

(i) Calculate sample mean, sample standard deviation and sample coefficient of skewness.

(ii) What would be the probability of the flood of magnitude $250 \text{ m}^3/\text{s}$ occurring in the next year?

Year	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Discharge (m^3/s)	33.9	31.7	31.5	59.6	50.5	38.6	43.4	28.7	32.0	51.8

Reduced mean $\bar{y}_n = 0.4952$, Reduced Standard Deviation (σ_n) = 0.9497.

- b) Define the terms exceedance probability, recurrence interval and frequency factor. [6]

7. a) What are the processes that Clark's method considers in the transformation of excess precipitation to runoff? How are they achieved? [3]

- b) Route the following hydrograph through a river reach with routing parameters K and x as 10 and 0.20, respectively. Take outflow discharge at the start of inflow flood as $5 \text{ m}^3/\text{s}$. Also estimate attenuation and lag of peak. [6+2]

Time (hr)	0	5	10	15	20	25	30	35	40
Inflow (m^3/s)	5	10	30	45	40	30	18	12	8

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2076 Chaitra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ A separate graph is provided.
- ✓ Assume suitable data if necessary.



- The catchment area of a reservoir is 15.5 km^2 . A uniform precipitation of 0.5 cm/h for 2 hr was observed on a particular day. 65% of precipitation reached into the reservoir. A canal carrying a flow of $1.1 \text{ m}^3/\text{s}$ is taken from the reservoir. The rate of evaporation was 0.6 mm/hr/m^2 . Assuming seepage loss to be 45% of evaporation loss, find the change in reservoir level for 10 hrs, if the water spread of the reservoir was 0.6 km^2 . [6]
- The normal annual rainfall of four stations A, B, C and D in a catchment area is 1150, 940, 1080 and 980 respectively. In a particular year the station B did not work and the rainfall amount of A, C and D were 1000, 970 and 890 respectively. Compute the missing precipitation at point B for that year. [6]
- Write down the procedure of developing Depth Area Duration (DAD) curve. From an isohyetal map prepared for 12 hrs precipitation, following data are obtained. [2+4]

Isohyetal interval (cm)	Area enclosed (km^2)
>70	125
60-70	225
50-60	215
40-50	350
<40	150

- Explain with neat sketch to determine the infiltration capacity of soil by using double ring infiltrometer. How you differentiate ϕ index from ω -index. [5+3]
- The infiltration rates observed during a test on a double ring infiltrometer are as given below:-

Time(hrs)	0.0417	0.125	0.333	0.75	1.5	2.5	3.5	4.5	5.5	6.5
f(cm/hr)	0.781	0.747	0.662	0.535	0.370	0.255	0.224	0.218	0.207	0.207

Determine the constant f_0 , f_c and k of Horton's equation which fits the above data. [6]

- With the following data, compute discharge for a river.

Distance from left bank (m)	0	1	4	7	10	13	16	19	20
Depth(m)	0	1	1.25	1.75	2.15	1.80	1.20	1.05	0
Revolution at 0.6d	0	30	40	30	40	35	25	20	0
Duration of observations(sec)	0	100	100	50	50	50	100	100	0

Calibrated value of constants for current meter: $a = 0.51$ and $b = 0.03$ [6]

7. Calculate the flood discharge of a stream by the slope area method given as below:

Upstream flow area = 45 m^2	Downstream Flow area = 50 m^2
Upstream wetted perimeter = 26 m	Downstream wetted perimeter = 28 m
Upstream velocity head coefficient = 1.18	Downstream velocity head coefficient = 1.23

Falling Difference = 1.15m, Reach length = 7km, Manning's Coefficient $\eta = 0.03$
 The eddy loss coefficient of 0.3 for gradual expansion and 0.1 for gradual contraction.

[8]

8. The ordinate of 4-h UH are given:

Time (hr)	0	2	4	6	8	10	12	14	16	18	20	22	24
Ordinate (m^3/s)	0	30	100	150	200	160	120	80	40	30	20	6	0

A catchment has rainfall of 3.5 cm, 2.5 cm and 4.5 cm in three consecutive two hour period. Assuming an average ϕ -index of 1.25 cm/hour and base flow of river is $50 \text{ m}^3/\text{s}$; determine the flood hydrograph of the catchment.

[12]

9. A river, whose annual flood peak can be represented by Gumbel distribution, has 100-years and 500-years return period flood of magnitude $9900 \text{ m}^3/\text{s}$ and $12100 \text{ m}^3/\text{s}$ respectively. The sample size = 30.

[4+4+3+3]

$[\bar{y}_n = 0.536, S_n = 1.1124]$

- What is the magnitude of 200 years and 1000-year flood?
- What are 95% and 80% confidence limits for 200 year and 1000 year flood if $f(95\%) = 1.96$ and $f(80\%) = 1.28$
- A hydraulic structure of 25-year life was designed for $12300 \text{ m}^3/\text{s}$ peak flow. What is the hydrologic risk of this structure?
- What peak flow should be taken into consideration if you want the structure to be 99% reliable for a structure life of 25 years.

10. A drainage basin has the following characteristics

[8]

Area = 180 km^2 ,

Storage constant = 10 hours

Time of concentration = 8 hour

The inter isochrones area distribution are as follows

Travel time (hr)	0-1	1-2	2-3	3-4	4-5	5-6	6-7	7-8
Inter isochrones area (km^2)	14	38	28	36	30	20	10	6

Determine the instantaneous unit hydrograph (IUH) for this catchment

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
(Examination Control Division
2076 Ashwin

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Semi-log graph is provided.
- ✓ Assume suitable data if necessary.



1. a) In a certain catchment, inflow rate into the catchment due to rainfall is given by equation $I=2t \text{ m}^3/\text{s}$. If loss in the catchment is neglected, determine the change in storage in catchment with in 3 hr duration. [4]
- b) Justify the uses of Hydrology in Engineering Design. [3]
2. For a station A, the recorded annual 24 hr maximum rainfalls are given below. [8]

Estimate the 24 hr maximum rainfall with return periods of 50 years by using provided semi log graph.

Year	1950	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65
Ppt (cm)	13.0	12.0	7.6	14.3	16.0	9.6	8.0	12.5	11.2	8.9	8.9	7.8	9.0	10.2	8.5	7.5

3. a) Calculate PET for May month by Penman method. [8]
 - Mean monthly temperature = 20°C
 - Mean RH = 75%
 - Mean Sunshine hoar = 10 hr.
 - Potential Sunshine hour = 13.5 hr.
 - Wind velocity at 2m height = 8 km/hr.
 - Albedo = 0.028
 - Upper terrestrial solar radiation = 14.4 mm of Hg/day
 - Latitude = 27° ; Longitude = 86°
 - Saturated vapour pressure at 20°C = 11mm of Hg
 - Slope of Saturated vapour pressure = $1.42 \text{ mm}^\circ\text{C}$
- b) A storm with a 15.0 cm precipitation produced a direct runoff of 8.7cm. The time distribution of storm is as follows.

Time from start (hr)	1	2	3	4	5	6	7	8
Incremental rainfall in each hr (cm)	0.6	1.35	2.25	3.45	2.7	2.4	1.5	0.75

- Estimate the Φ -index of the storm. [5]
4. a) Define catchment. What are the factors affecting runoff from a catchment? [1+5]
 - b) For the purpose of discharge measurement in a stream by Slope-Area method the following data has been obtained. [8]

	U/S Section	Middle Section	D/S Section
Area (m^2)	105.75	102.63	96.63
Wetted perimeter (m)	64.25	60.20	58.00
Gauge Reading (m)	315.5	-	315.15
Manning's Roughness	0.025	0.027	0.029

Determine the stream discharge for length between U/S and D/S sections as 260 m assuming coefficient of contraction K_e as 0.1.

- c) Define shifting control in stage discharge relationship. What are the causes of shifting control? [1+2]


5. a) Define unit hydrographs and explain the uses of hydrograph. [5]
- b) The ordinates of a 4 hr UH of a basin area of 300 km². Three hundred square km measured at 1-hr intervals are 6, 36, 66, 91, 106, 93, 79, 68, 58, 49, 41, 34, 27, 23, 17, 13, 9, 6, 3 and 1.5 m³/s respectively. Obtain the ordinates of a 3 hr UH of the basin using the s-curve technique. [10]
6. a) In the time series data of annual peak flood for 75 years, the mean and standard deviations are found to be equal to 5561 m³/s and 1718 m³/s respectively. Using $\bar{y}_n = 0.556$ and $S_n = 1.189$ (for 75 yrs). [4+4]
- i) Determine the peak flood for 0.4% probability of exceedence by Gumbel's method.
- ii) Compute 90% confidence limits for above floods, using $f(c) = 1.6$ for 90% confidence level respectively.
- b) Explain the rational method of determining the floods. Also write down its limitations. [6]
7. A drainage Basin has the following characteristics: [6]
- Area = 110 Km², Time of concentration = 18 h, Storage time constant = 12 h and inter-isochrones area distribution as below:
- | | | | | | | | | | |
|---|-----|-----|-----|-----|------|-------|-------|-------|-------|
| Travel Time (h) | 0-2 | 2-4 | 4-6 | 6-8 | 8-10 | 10-12 | 12-14 | 14-16 | 16-18 |
| Inter-isochrone area (km ²) | 3 | 9 | 20 | 22 | 16 | 18 | 10 | 8 | 4 |
- Determine the Clark's 2h-IUH for this catchment.

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2075 Chaitra

Exam.	Regular/Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ A separate graph paper is provided.
- ✓ Assume suitable data if necessary.



1. Explain hydrologic cycle with neat sketches and justify its need in Engineering Hydrology. [3+2]
2. The rainfall depth with time during a storm at a station is given below. Compute maximum average intensities of the rainfall for durations 30 minutes, 1hr, 2 hr, and 5hr and plot the resulting intensity duration curve. [6]

Time (hr)	06:00	06:30	07:00	07:30	08:00	08:30	09:00	09:30	10:00	10:30	11:00	11:30	12:00
Rainfall (mm)	0	6	6	5	8	5	9	13	6	4	3	2	0

3. a) Explain the water budget and energy budget methods for estimation of evaporation. [3+3]
- b) The mass curve of an isolated storm in a 500ha watershed is as follows:

Time from strat (h)	0	2	4	6	8	10	12	14	16	18
cumulative rainfall (cm)	0	0.8	2.6	2.8	4.1	7.3	10.8	11.8	12.4	12.6

If runoff measured at the outlet is 0.361 Mm^3 is baseflow, estimate the ϕ -index of the storm and duration of rainfall excess. Also determine W-index if the other losses in the storm is 0.1 Mm^3 . [5+1]

- c) Differentiate actual and Potential Evapotranspirations. [3]
4. a) Following are the data of gauge and discharge collected at a particular section of the river by stream gauging operation. [6+2]
 - i) Develop a gauge-discharge relationship for this stream at this section for use in estimating the discharge for a known gauge reading. What is the coefficient of correlation of the derived relationship? Use a =7.5m for the gauge corresponding to zero discharge.
 - ii) Estimate the discharge corresponding to a gauge reading of 10.5m at this gauging station.

Gauge reading (m)	Discharge (m^3/s)	Gauge reading (m)	Discharge (m^3/s)
7.65	15	8.48	170
7.7	30	8.98	400
7.77	57	9.30	600
7.8	39	9.5	800
7.9	60	10.5	1500
7.91	100	11.1	2000
8.08	150	11.7	2400

- b) Calculate the discharge in a stream by using mid-section method from provided data. A current meter is used to measure velocity at 0.6 depth and calibrated as $V=0.3N+0.004$ [8]

Distance from right bank (m)	0	2	4	6	9	12	15	18	20
Depth (m)	0	0.50	1.10	1.90	2.2	1.8	1.1	0.7	0
Number of revolutions	0	80	83	130	121	116	100	90	0
Time (s)	0	170	110	100	100	100	100	90	0

5. a) Define storm hydrograph, direct runoff hydrograph and baseflow. Explain the methods to separate base flow from hydrograph with clear sketches. [3+3]
- b) Following are the ordinates of hydrograph from a catchment area of 770km^2 due to 6-hr rainfall. Derive the ordinates of flood hydrograph due to 3.3cm and 5.5cm effective rainfall of duration 12-hr. [10]

t (hr)	0	6	12	18	24	30	36	42	48	54	60	66	72
Discharge (m^3/s)	40	65	215	360	400	350	270	205	145	100	70	50	40

6. a) Explain Rational method of flood predication. Also mention its limitations & uses. [3+3]
- b) Analysis of the annual flood peak of river of 21 years yielded a mean of $8520\text{m}^3/\text{s}$ and standard deviation of $3900\text{m}^3/\text{s}$. A proposed water control project on this river is to have an expected life of 40 years. The acceptable reliability by the design policy is 85%. [4+4]
- i) Using Gumbel's Method recommend the flood discharge for this project. Take $y_n=0.5252$ and $S_n=1.0696$ for 21 years.
- ii) What would the 80% confidence limit of the above flood if $f(c)=1.282$ at 80% confidence level.

7. a) What do you understand by flow routing? [2]

- b) A drainage basin has the following characteristics:
Area = 123 km^2 , time of concentration=14 hr, storage constant=10h and inter-isochrone area distribution as below:

Travel Time (hr)	0-2	2-4	4-6	6-8	8-10	10-12	12-14	14-16	16-18
Inter-isochrone area (km^2)	4	10	21	24	18	20	12	9	5

Compute the flood hydrograph by using Clark's IUH. [6]

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) Explain **double mass** curve method for checking a rainfall data for consistency. [6]
- b) What **factors** should be considered in selecting a site for stream gauging station. [4]
- c) The **catchment area** of a reservoir is 1600 ha. A uniform precipitation of 8 mm/hr for 2 hour **was observed** on particular day. 55% run off reached the reservoir. A canal carrying a **flow of** $1\text{ m}^3/\text{s}$ is taken from the reservoir. The rate of evaporation was 0.8 mm/h/m^2 . Assuming seepage loss is 40% of evaporation loss, find the change in the reservoir **level** for 6 hours, if the water spread of the reservoir was 45ha. [6]
2. a) Explain the **different** methods of determining the average rainfall over a catchment due to a **storm**. [6]
- b) Calculate the **potential** evapotranspiration from an area near Dharan, Sunsari in the month of **april** by Penmans' formula. The following data are available. [10]

Latitude: $26^{\circ}49'N$, Elevation (from msl) : 250.00 m
Mean monthly temperature : $22.5^{\circ}C$, Mean relative humidity: 75%
Mean observed sunshine hour: 10 hr Wind velocity at 2m height: 80 km/day
Psychrometric constant : $0.49\text{ mm of Hg}/^{\circ}C$ Reflection coefficient: 0.20
 e_w : 20.4 mm of Hg , A : $1.24\text{ mm}/^{\circ}C$ $b = 0.52$, $H_a = 14.9\text{ mm}$ of evaporable water per day
Mean monthly value of possible sunshine hour (N) : 12.7 hours
Nature of sunshine cover: closed ground green crop, where the symbols carry their usual meanings

3. a) The mass curve of an isolated storm over a watershed is given below.

Time from start (hr)	0	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
Cumulative rainfall (cm)	0	0.6	1.4	1.9	2.8	3.7	5.4	6.2	7	7.8	8.2

If the storm produced a direct run off of 3.8 cm at the outlet of the watershed, estimate the ϕ -index of the storm and duration of rainfall excess. [6]

- b) The ordinates of a 2-h UH are given below. Derive the ordinates of a 3-h UH by S-curve method.

Time (hr)	0	2	4	6	8	10	12	14	16	18	20	22	24
Ordinates of 2-h UH (m^3/s)	0	25	100	160	190	170	110	70	30	20	15	6	0

Calculate the flood discharge of a storm of 3h and 2h rainfall of 8 cm and 7 cm respectively. Consider ϕ -index 0.3 cm/hr and baseflow $10\text{ m}^3/\text{s}$. [10]

4. a) The ordinates of 4 hr unit hydrograph are given below.

Time (hr)	0	2	4	6	8	10	12	14	16	18	20	22	24
4-hr UH ordinates (m^3/s)	0	9	12	28	40	52	49	36	29	20	13	10	0

The storm has successive 2 hr, 4 hr and 6 hr rainfall of 2.5, 8.0 and 9.0 cm respectively. ϕ -index is of 0.15 cm/hr and base flow of $40\text{m}^3/\text{s}$. Determine the 2 hr UH and resulting flood hydrograph from above storm. [12]

- b) Annual flood peak flood of a river for 20 years yielded a mean value of $5460\text{ m}^3/\text{s}$ and the standard deviation of $2950\text{ m}^3/\text{s}$. The proposed hydraulic project on this river has an expected life of 35 years and reliability of project is 87%.

(i) Using Gumbel's method predict the flood discharge for the project if the value of $\bar{y}_n = 0.5402$ and $S_n = 1.1285$.

(ii) What discharge is to be adopted if the safety factor for flood magnitude is taken as 1.5 and also determine safety margin on this basis.

(iii) Calculate the confidence limits at 95% confidence probability $f(c) = 1.96$ [12]

5. Route the following hydrograph through a river reach for which $K = 12\text{h}$ and $X = 0.20$. At the start of the inflow flood, the outflow discharge is $10\text{m}^3/\text{s}$ also find lag of peak and lag attenuation. [10]

Time (h)	0	6	12	18	24	30	36	42	48	54
Inflow (m^3/s)	10	20	50	60	55	45	35	27	20	15

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Necessary tables are attached herewith.
- ✓ Assume suitable data if necessary.

1. Explain water budget equation. What is the role of water budget equation in hydrology? [2+2]
2. The annual rainfall at station X and the average of annual rainfall at 25 surrounding base stations in can are given below for the period of 36 years starting from 1941 [6+1+4+3]
 - i) Check whether the data of starting X is consistent
 - ii) In which year a change in regime indicated?
 - iii) Compute the mean annual rainfall for stations X at its present site for the given 36 year period first without adjustment and secondly with the data adjusted for the change in regime.
 - iv) Compute the adjusted annual rainfall at station X for the affected period.
3. a) Starting from Horton's equation, derive an expression for total infiltration in time "t". Also draw graph showing infiltration and total infiltration vs time. [4+2]
- b) Calculate the potential evapotranspiration from an area near Simara, Bara, in the month of April by Penman's formula. The following data are available. [10]

Latitude: 27°N

Elevation (from msl): 107 m

Mean monthly temperature: 23°C

Mean relative humidity: 75%

Mean observed sunshine hour: 10

Wind velocity at 2 m height: 85 km/day

Nature of sunshine cover: closed ground green crop

Given:

A: 1.27mm/°C

$H_a = 15.00$ mm of evaporable water per day

Mean monthly value of possible sunshine hour (N): 12.5 hours

Saturated vapour pressure at 23°C = 21.04 mm of Hg

4. a) Calculate the flood discharge of a stream by the slope area method given the following data: [12]

Upstream flow area = 3500 m^2

Upstream wetted perimeter = 650

Upstream velocity head coefficient = 1.17

Down stream flow area = 3250 m^2

Down stream wetted perimeter = 621 m

Down stream velocity head coefficient = 1.21

Falling difference = 0.4

Reach length = 1300 m

Manning's coefficient $\eta = 0.03$

- b) Describe about the use of current meter according to flow characteristics of channel. [4]

5. a) What is Unit hydrograph? What are assumptions and limitations of UH? [2+2]

- b) In a storm, the rainfall of depth 0.7cm, 0.9cm, 0.2cm, 1.0cm occurred in four successive hours. The storm hydrograph due to this storm has following hourly ordinates: [8]

0.5, 44.5, 110.5, 85.5, 102.8, 94.0, 38.4, 18.6, 10.9, 5.3, 2.9, 0.5 m^3/s

If the average losses are 0.2cm/hr, estimate the hourly ordinates of unit hydrograph. Assume suitable value of base flow. Calculate 2-h UH using Scurie Method.

6. A river, whose annual flood peak can be represented by Gumbel distribution, has 100-years and 500-year return period flood of magnitude $9900 \text{ m}^3/\text{s}$ and $12100 \text{ m}^3/\text{s}$ respectively. The sample size is $n = 30$. $\left[\bar{y}_n = 0.536, s_n = 1.1124 \right]$ [4+4+3+3]

- What is the magnitude of 200 year and 1000 year flood?
- What are 95% and 80% confidence limits for 200 year and 1000 year flood if $f(95\%) = 1.96$ and $f(80\%) = 1.28$
- A hydraulic structure of 25 year life was designed for $12300 \text{ m}^3/\text{s}$ peak flow. What is the hydrologic risk of the structure?
- What peak flow should be taken into consideration if you want the structure to be 99% reliable for a structure life of 25 years.

7. A drainage basin has the following Characteristics. [4]

Area = 172 Km^2 ,

Storage constant = 10 hour

Time of concentration = 8 hour

The inner-isochrones area distributions are as follows

Travel Time (hr)	0-1	1-2	2-3	3-4	4-5	5-6	6-7	7-8
Inter-isochrones area (Km^2)	12	40	26	36	28	18	8	4

Determine the IUH for this catchment.

Year	Rainfall at X	Average rainfall of base stations	Year	Rainfall at X	Average rainfall of base station
1941	163	135	1959	112	123
1942	119	111	1960	95	142
1943	121	124	1961	106	92
1944	129	111	1962	81	91
1945	126	123	1963	116	131
1946	120	90	1964	112	104
1947	153	138	1965	80	97
1948	172	119	1966	88	111
1949	127	108	1967	85	114
1950	108	107	1968	90	92
1951	126	111	1969	120	146
1952	190	142	1970	72	93
1953	112	112	1971	113	138
1954	87	99	1972	82	112
1955	86	93	1973	116	117
1956	111	131	1974	122	152
1957	68	92	1975	73	90
1958	88	142	1976	74	104

Exam.	New Back (2066 & Later Batch)		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. Explain Water balance Equation and explain each process. [4]
2. A storm commenced at 7:00 hours. The ordinates of the rainfall mass curve of this storm in mm as recorded by a recording rain gauge at 15 minute intervals are 0, 9.5, 17.0, 27.0, 40.5, 49.0, 63.0, 84.0, 95.0, 102.0, 110.0, 112.0 and 112.0. Plot the intensity duration graph by computing the maximum rainfall intensities for durations of 15, 30, 45, 60, 90, 120 and 180 minutes. [12]
3. a) Explain energy balance equation and derive evaporation equation using Bowen's ratio. [4]
b) For a storm of 3 hours on 50 ha catchment, the rainfall rates are as follows: [6]

Time of rain from beginning (min):	0	30	45	75	100	125	150	180
Rain fall rate (cm/hour):	0	2.5	3.5	2.0	4.8	5.2	1.8	5.3

If the ϕ index of this basin is 2.5 cm/hour, calculate total rainfall, runoff in (cm) and peak discharge.

- c) Explain interception and depression storage losses. How these losses are estimated during hydrological analysis. [2+2]
4. a) Explain how stage discharge relationship is established. [4]
b) Explain the procedure of stream flow measurement by area-velocity method. Also, describe the mid section method for discharge computation using sketch and equations. [3+3]
b) What factors should be considered in selecting a site for stream gauging station. [4]
5. a) The 3 h unit hydrograph of a basin with an area of 20 km² at one hour interval are as given below 0, 0.41, 1.38, 4, 7.72, 10.06, 9.24, 6.62, 4.57, 3.86, 2.76, 2.07, 1.38, 0.83, 0.41, 0. If rainfall excess with intensity of 2.0 cm/h for a period of 4 h followed immediately by another 3 h storm with an intensity of 1 cm/h occurs on the basin, what is the peak flow produced by this rainfall and at what time after the commencement of rainfall would this peak flow occur? Assume baseflow is negligible. [10]
b) A 6 h unit hydrograph of a basin has a peak ordinate of 96 m³/s. When the base flow in the stream is 25 m³/s, and when the basin has reached its minimum infiltration capacity of 2.5 mm/h, a 6 h storm with 18.3 cm of total rainfall had occurred on the basin. What is the magnitude of the peak discharge in the flood hydrograph produced by this storm? [4]

6. a) The annual peak discharge of a river follows the Gumbel's extreme value distribution with a mean of $10000 \text{ m}^3/\text{s}$ and a standard deviation of $3000 \text{ m}^3/\text{s}$. What is the probability that the annual peak discharge is more than $15000 \text{ m}^3/\text{s}$? What is the magnitude of the peak discharge with an exceedance probability of 0.1? [Hint:

$$\alpha = \frac{1.28255}{\sigma}; \beta = \mu - 0.48\sigma$$

[8]

- b) Differentiate between continuous and discrete random variables. Give examples each in hydrology. Give three formulae which are used to determine the return period. [1+2+3]

7. The ordinates of the inflow hydrograph at 6 hr interval are as follows:

[8]

Time (hrs)	0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90
Discharge (m^3/s)	0	50	280	610	1290	1900	2130	1900	1600	1440	1060	780	500	370	220	130

The discharge over the spillway Crest and the surcharge storage above the crest for different water surface elevations are as follows:

Water surface elevation (m)	140	141	142	143	144	145	146
Outflow Discharge (m^3/s)	0	170	482	883	1360	1905	2500
Storage $\times 10^6 (\text{m}^3)$	0.00	15.0	35.0	60.0	95.0	140.0	240.0

Determine:

- Maximum reservoir level
- Maximum outflow rate
- Reduction in the peak

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. Define the following terms: hydrological cycle, runoff, water balance and catchment. [4]
2. The catchment area of a basin may be approximated as a semicircle of radius r km with respect to the coordinate axis set up with its origin at the center of the circle and the x-axis coincident with the diameter the area lies in the first and second quadrants and the position coordinates of the rain gauge stations are $(0,0)$, $\left(\frac{r}{2}, \frac{r}{2}\right)$ and $\left(-\frac{r}{2}, \frac{r}{2}\right)$ km. Show that the Thiessen weights of the gauges are given by $\frac{0.5}{\pi}$, $(0.5-0.25/\pi)$ and $(0.5-0.25/\pi)$ respectively. [12]
3. a) The ordinates of a rainfall mass curve of a storm over a basin of area 850 km^2 measured in mm at one hour interval are 0, 10, 22, 30, 39, 45.5, 50, 55.5, 60, 64 and 68. If the infiltration during this storm can be represented by Horton's equation with $f_0 = 6.5 \text{ mm/h}$, $f_c = 1.5 \text{ mm/h}$ and $k = 0.15 / \text{h}$, estimate the resulting runoff volume. [10]
b) Write down Penman equation and explain all variables and constants involved in it. [4]
4. a) Mention the factors that should be considered for the proper selection of stream gaging site. [4]
b) Explain with sketch how you determine the stage for zero discharge. [6]
c) Find the drainage density, average length of overland flow, form factor and channel slope for a basin with the following data: [4]

Area of basin (A) = 140 km^2
Distance between the outlet to the farthest point (L) = 21 km
Elevation difference between the outlet and the farthest point (h) = 1090 m
Total length of channels of all order (L_s) = 654 km
5. a) Describe the procedure of derivation of unit hydrograph from complex storms using appropriate expressions. [8]
b) Given below are ordinates of a 4 h unit hydrograph of a basin in m^3/s at one hour intervals. [6]

4, 25, 44, 60, 70, 61, 52, 45, 38, 32, 27, 22, 18, 14, 11, 8, 6, 4, 2, 1

What is the area of the basin?
6. The observed annual peak flood of a river in m^3/s for a period of 20 years from 1981 to 2000 are given below: [14]

190, 155, 298, 136, 137, 131, 140, 124, 185, 104, 91, 154, 109, 269, 164, 270, 142, 72, 130, 111.

Prepare a graph of flood peak versus the return period and hence estimate the annual peak flood with a return period of 30 years.
7. Route the following flood hydrograph through a river reach for which Muskingum coefficient $k=10 \text{ h}$ and $x=0.2$. At the start of inflow flood, the outflow discharge is $10 \text{ m}^3/\text{sec}$. [8]

Time (h)	0	6	12	18	24	30	36	42	48	54
----------	---	---	----	----	----	----	----	----	----	----

Exam.	New Back (2066 & Later Batch)		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. Explain Hydrologic cycle and water balance equations. [2+2]

2. a) Explain the different methods of determining the average rainfall over a catchment due to a storm. Discuss the relative merits and demerits of the various methods. [3+3]

b) Explain double mass curve test for rainfall data. [6]

3. a) Explain briefly (i) Infiltration Capacity (ii) Φ -index lake (iii) W-index [6]


b) Explain the energy budget method of estimating evaporation from a lake. [8]

4. a) Determine the stage corresponding to zero discharge from the following data of a rating curve: [8]

Stage (m)	20.80	21.42	21.95	22.37	23.00	23.52	24.00
Discharge (m ³ /s)	100	200	300	400	600	800	1000

b) Explain different methods of Stream gauge reading with sketch. [6]

5. A hydrograph for a 4,250-acre basin is shown in the accompanying sketch. The given hydrograph actually appeared as a direct runoff hydrograph from the basin, caused by net rain falling at an intensity of 0.20 in./hr for a duration of 5 hr, beginning at $t = 0$. [4+3+3+4]

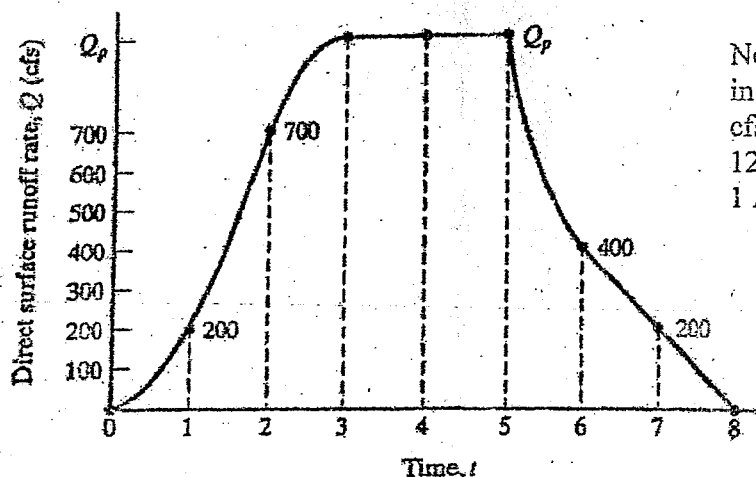

Note

in = inches

cfs = cubic feet/sec

12 inches = 1 foot

1 Acre = 43560 sq.ft

(a) Determine the excess release time of the basin.

(b) What percentage of the drainage basin was contributing to direct runoff 4 hr after rain began ($t = 4$)?

(c) Use your response to part (b) to determine Q_p as shown in the sketch. Do not scale Q_p from the drawing.

(d) Note that rain continued to fall between $t = 3$ and $t = 5$. Why did the hydrograph form a plateau between $t = 3$ and $t = 5$, rather than continue to rise during those 2 hours?

6. a) Explain Gumble's Distribution function. Derive frequency factor (k) using Gumble's distribution. [7]
- b) The flood discharge for 25 and 250 years from fitted Gumbel distribution are 90 and 550 m³/sec respectively. Estimate the flood magnitudes for 50, 500 and 1000 years by Gumbel analytically. [7]
7. A basin having 128 km² of drainage area has 22 hours and 14 hours of concentration time and storage constant respectively. Determine the IUH for this basin if inter-isochrones area distribution is as below: [8]

Travel time (hr)	0-3	3-6	6-9	9-12	12-15	15-18	18-21	21-24	24-27
Area(km ²)	2	7	17	25	31	23	14	6	3

04 TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2071 Chaitra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. Explain all hydrological process in Hydrological Cycle. [4]
2. a) Describe methods of averaging point rainfall over a catchment area with neat sketches. [6]
- b) Explain the energy budget method of estimating evaporation from a lake. [6]
3. Calculate the potential evapotranspiration for an area over Kathmandu in the month of March by Penman Method. [14]

The flowing data is available:

Mean Monthly temp	: 10.0°C
Mean RH	: 60%
Mean sunshine hours	: 9 h
Potential sunshine hours	: 12.9 h
Wind Velocity at 2m height	: 5 Km/hour
Albedo	: 0.25

Upper terrestrial Solar radiation = 11 mm of hg/day

Other values:

Latitude	: 28.5°	
Longitude	: 84.5°	
Saturated vapor pressure at 10.0 °C		= 9.2 mm of Hg
Slope of saturate vapor pressure		= 1.24 mm/°C
Psychrometric constant		= 0.49mm/°C
Boltzman constant		= 2.01 *E-9 mm/day

4. a) Compute the stream-flow from following data. The calibrated equation of current meter is: [8]

$V = 0.035 + 0.74 * N$, where V is in m/sec and N is revolution/sec.


Distance from bank (m)	0	0.6	1.5	2.5	3.5	5.0	6.0	7.0	7.5
Water Depth (m)	0	0.3	0.75	1.2	1.7	1.3	0.7	0.3	0
No. of Revolutions	0	15	95	110	120	110	80	20	0
Time (sec)	0	45	85	95	90	100	70	40	0

- b) Explain how the monthly flows from the ungauged locations are estimated from the observed rainfall data over the catchment, in Nepal. [6]

5. A 2-hr unit hydrograph for a basin is shown in the sketch.

[6+3+5]

- (a) Determine the peak discharge (in cfs) for a net rain of 5.00 in./hr and a duration of 2 hr.
- (b) What is the total direct surface runoff (in inches) for the storm described in part (a)?
- (c) A different storm with a net rain of 0.50 in./hr lasts for 4 hr. What is the discharge at 8 p.m. if the rainfall started at 4 p.m.?

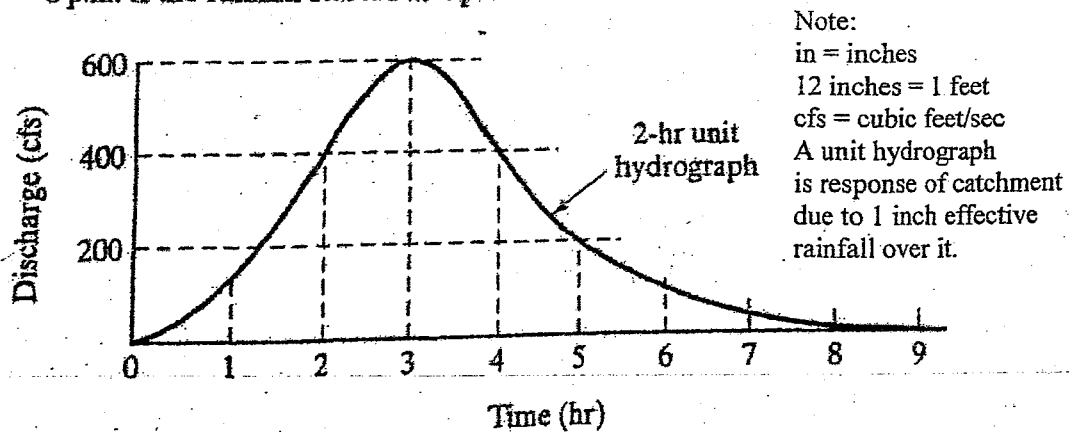

- 6. a) If the annual flood series data for a catchment are available for N consecutive years, explain a procedure to determine a flood discharge with a return period of T , (where $T > N$), by using Log Pearson type III distribution method. [8]
- b) Calculate the flood discharge using Empirical method from a catchment of area 100sqkm. The catchment has longest river of 60km. The elevation difference of the river is 20m. Rainfall runoff coefficient is 0.6 and maximum daily rainfall is 200mm. [6]
- 7. Explain in detail time area method for estimating runoff hydrograph. [8]

Exam.	New Back (2066 & Later Batch)		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. Define Hydrological cycle and water balance equation. Write down a general water balance equation for a basin. [4]
2. a) The shape of a catchment is in the form of a pentagon ABCDE. There are 4 rain gauge stations P, Q, R and S inside the catchment. The position co-ordinates in km are: A(0,0), B(50,75), C(100,70), D(150,0), E(75,-50), P(50,25), Q(100,25), R(100,-25) and S(50,-25). If rainfalls recorded at P, Q, R and S are 90, 105, 114 and 120 mm respectively, determine the mean rainfall by Thiessen Polygon method. [6]
- b) Explain the different types of precipitation based on lifting mechanism. [6]
3. a) Calculate the free water surface evaporation in june using the Penman method from an area, whose latitude is approximately 33°N. The available data include air temperature = 30°C, wind speed at 2 m height = 10 km/h, relative humidity = 60%, mean observed sun shine hours = 12 and reflection coefficient = 0.05. [8]
- b) The infiltration capacity in a basin is represented by Horton's equation as $f_p = 3.0 + e^{-2t}$, where f_p is in cm/hr and 't' in hours. Assuming the infiltration to take place at capacity rates in a storm of 60 minutes during, estimate the depth of infiltration in (i) the first 30 minutes and (ii) the second 30 minutes of the storm. [3+3]
4. a) Estimate the flood discharge through a 5m-wide rectangular channel for the following data. The depth of water is 2m and 1.8m at two section 500m apart. The drop in water surface elevation is 0.25 m. Manning's roughness coefficient is 0.025, Assume eddy loss to be zero. [8]
- b) The following data were collected for a stream at a gauging station. Compute the discharge. [6]

Distance from one end of water surface (m)	Depth, d (m)	Immersion of current meter below water surface					
		at 0.6d		at 0.2d		at 0.8d	
		Rev.	Sec.	Rev.	Sec.	Rev.	Sec.
3	1.4	12	50				
6	3.3			38	52	23	55
9	5.0			40	58	30	54
12	9.0			48	60	34	58
15	5.4			34	52	30	50
18	3.8			35	52	30	54
21	1.8	18	50				

Rating equation of current meter : $v = 0.3N + 0.05$

5. An S- hydrograph is given such that at time $t = 0$, its ordinate is 1 cm/h and it remains so for an indefinite period of time. Determine a 2-hour unit hydrograph. Using this unit hydrograph, determine a 4- hour unit hydrograph. [8+6]

6. An analysis of an annual flood, series covering the period 1890 to 1966 on a certain river shows that the 80 year flood has a magnitude of 620000 units and 1.4 year flood has a magnitude of 215000 units. Assume the annual floods are Gumbel distributed. [6+4+4]
- What is the probability of having a flood as great as or greater than 440000 units?
 - What is the magnitude of flood having a recurrence interval of 40 years?
 - What is the probability of having 575000 units flood or a greater flood in the coming 25 years time?
7. a) Explain the concept of attenuation and lag of peak due to routing with sketch. [4]
b) Starting from the continuity equation, obtain the equation of reservoir routing. [4]

SATURATION VAPOR PRESSURE OF WATER

Temperature		Saturation vapor pressure, e_s		Slope (mm Hg/°F)
°C	°F	mb	mm of Hg	
0	32	6.11	4.58	0.30
5.0	41.0	8.72	6.54	0.45
7.5	45.5	10.37	7.78	0.54
10.0	50.0	12.28	9.21	0.60
12.5	54.5	14.49	10.87	0.71
15.0	59.0	17.05	12.79	0.80
17.5	63.5	20.00	15.00	0.95
20.0	68.0	23.38	17.54	1.05
22.5	72.5	27.25	20.44	1.24
25.0	77.0	31.67	23.76	1.40
27.5	81.5	36.71	27.54	1.61
30.0	86.0	42.42	31.82	1.85
32.5	90.5	48.89	36.68	2.07
35.0	95.0	57.07	42.81	2.35
37.5	99.5	64.46	48.36	2.62
40.0	104.0	73.14	55.32	2.95
45.0	113.0	94.91	71.20	3.66

MEAN MONTHLY SOLAR RADIATION INCIDENT AT THE EARTH'S OUTER SPACE (EXTRATERRESTRIAL RADIATION), E_0 , IN MJ/M² OF SURFACE WATER/DAY, IN NORTHERN HEMISPHERE WITH $L = 560 \text{ CAL/C}$

Month	North latitude (°N)									
	90°	80°	70°	60°	50°	40°	30°	20°	10°	0°
January	—	—	—	1.3	3.6	6.0	8.5	10.8	12.8	14.5
February	—	—	1.1	3.5	5.9	8.3	10.5	12.3	13.9	15.0
March	—	1.8	4.3	6.8	9.1	11.0	12.7	13.9	14.8	15.2
April	7.9	7.8	9.1	11.1	12.7	13.9	14.8	15.2	15.2	14.7
May	14.9	14.6	13.6	14.6	15.4	15.9	16.0	15.7	15.0	13.9
June	18.1	17.8	17.0	16.5	16.7	16.7	16.5	15.8	14.8	13.4
July	16.8	16.5	15.8	15.7	16.1	16.3	16.2	15.7	14.8	13.5
August	11.2	10.5	11.4	12.7	13.9	14.8	15.3	15.3	15.0	14.2
September	2.6	4.0	6.9	8.5	10.5	12.2	13.5	14.4	14.9	14.9
October	—	0.2	2.4	4.7	7.1	9.7	11.3	12.9	14.1	15.0
November	—	—	0.1	1.9	4.3	6.7	9.1	11.2	13.1	14.6
December	—	—	—	0.9	3.0	5.5	7.9	10.3	12.4	14.3

MEAN MONTHLY VALUES OF POSSIBLE SUNSHINE HOURS, H_p

Latitude (°N)	Month											
	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
0°	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1
10°	11.6	11.8	12.1	12.4	12.6	12.7	12.6	12.4	12.9	11.9	11.7	11.5
20°	11.1	11.5	12.0	12.6	13.1	13.3	13.2	12.8	12.3	11.7	11.2	10.9
30°	10.4	11.1	12.0	12.9	13.7	14.1	13.9	13.2	12.4	11.5	10.6	10.2
40°	9.6	10.7	11.9	13.2	14.4	15.0	14.7	13.8	12.5	11.2	10.0	9.4
50°	8.6	10.1	11.8	13.8	15.4	16.4	16.0	14.5	12.7	10.8	9.1	8.1

03 TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2070 Ashad

Exam.	New Back (2066 & Later Batch)		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Normal graph papers will be provided.
- ✓ Assume suitable data if necessary.

- Why the study of hydrology is important for engineers for planning and designing of water resources projects in Nepal? Explain the significant features of global water balance with necessary equation. [2+2]
- In what way you can present the precipitation data? What are the benefits of each method? Explain the method of drawing Intensity Duration Frequency (IDF) curve. [3+2+3]
 - A catchment has seven raingauge stations. In a year the annual rainfall in cm recorded by the gauges are as follows: 130, 142.1, 118.2, 108.5, 165.2, 102.1, 146.9 for a 5% error in the estimation of the mean rainfall, calculate the minimum number of additional stations required to be established in the catchment. [4]
- A 4-hour storm occurs over a 80 km² watershed. The details of the catchment are as follows: [14]

Sub basin (km ²)	ϕ index (mm/h)	Hourly Rainfall (mm)			
		1 st hour	2 nd hour	3 rd hour	4 th hour
15	10	16	48	22	10
25	15	16	42	20	8
35	21	12	40	18	6
5	16	15	42	18	8

Calculate the runoff from the catchment and the hourly distribution of the effective rainfall for the whole catchment.

- Calculate the discharge of river section as given: [14]

Distance (m)	0	1	2	3	4	6	8	12	16	17	18	19
Depth (m)	0	1	4.3	7.2	8.5	7.4	5.6	4.7	3.5	2.1	1.4	0
Revolution / s at 0.2d	0	1.4	1.0	2.6	2.9	2.7	2.5	2.3	2.1	1.8	1.5	0
Revolution / s at 0.8d	0	.7	1.2	1.8	2.0	1.9	1.7	1.5	1.3	1.1	1.0	0

The current meter formula is $v = 0.02 N_s - 0.02$, v = velocity (m/s) and N_s = revolution per minute.

- In a storm the rainfall excess of 0.5 cm, 0.0 cm and 0.8 cm occurred in three successive hours. The storm hydrograph due to this storm has the hourly ordinates (Q) as given below: 0.5, 44.5, 110.5, 85.5, 102.8, 94.0, 38.4, 18.6, 10.9, 5.3, 2.9, 0.8 (cumecs). If there is a constant base flow of 0.5 cumecs, find the hourly ordinates of unit hydrograph. If 2 successive storms of 6.5 cm and 10.5 cm of 3 hours duration and ϕ -index of 0.2 cm/hr occurred in the same catchment, what is the peak flow from the catchment? [9+5]

6. a) Mention the steps for the computation of flood of return period T using graphical method. [4]

b) The following are the annual peak flow data (m^3/s) of a river from 1990 to 2006: [10]

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998
Peak discharge (m^3/s)	1400	4160	2580	2910	2250	1360	2280	2540	3900
Year	1999	2000	2001	2002	2003	2004	2005	2006	
Peak discharge (m^3/s)	3420	6170	2160	1360	5440	1340	3360	2800	

Compute flood magnitude with 50 year return period (T) using Log-Pearson type III distribution. For $T = 50$ year, obtain frequency factor (K_T) for the computed coefficient of skewness (C_s) using following table.

C_s	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
K_T	2.054	2.107	2.159	2.211	2.261	2.311	2.359	2.407	2.453	2.498	2.542

C_s	1.2	1.4	1.6	1.8	2	2.2	2.5	3
K_T	2.626	2.706	2.78	2.848	2.912	2.970	3.048	3.152

7. Explain the procedure of deriving Clark UH. [8]

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. Explain different prospects of Hydrological study. [4]
2. a) What can be the causes of inconsistency while recording the rainfall of a station? Explain how it can be corrected for the future use? [4]
- b) The rainfall depth with time during a storm at a station is as given: [2+6]

Time	6:00	6:30	7:00	7:30	8:00	8:30	9:00	9:30	10:00	10:30	11:00	11:30	12:00
Rainfall (cm)	0	7	5	8	9	13	10	8	6	5	3	1	0

- i) Construct the hyetograph of this storm for 30 min and 2 hours interval
- ii) Compute maximum average intensity of rainfall for 30 min, 1 hour, 2 hour in this storm and plot the resulting intensity duration curve.
3. a) Calculate the daily potential evapotranspiration by the Penman method from an area having the following characteristics: latitude = 30°N, elevation = 300 m above mean sea level, mean monthly temperature = 15°C, mean relative humidity = 70%, mean observed sunshine hours = 10, wind velocity at 2 -m height = 50 km/day and reflection coefficient is 0.05. [8]
- b) Precipitation falls on a 100 km² drainage basin according to the following schedule: [6]

Time (minute)	30	60	90	120
Rainfall intensity (cm/hr)	4	2	6	5

Determine the total storm rainfall. Also, find out ϕ -index for the basin if the net storm runoff is 3 cm.

4. a) Explain the stream flow computation by slope area method. [5]
- b) Write the method of estimating monthly flows in a stream or river by MIP method in a Nepalese river. [4]
- c) What is mean by rating curve? Write the uses of rating curve. Also explain the method of drawing the rating curve in a particular section of a river. [1+2+2]
5. a) The direct runoff hydrograph due to an effective rainfall event is given by a triangle such that its base is 8 hours and its height at the midpoint of the base is 1cm/h. The duration and intensity of the effective rainfall are 4 hours and 1cm/h, respectively. Derive and sketch a 4 hour unit hydrograph. [8]
- b) A 1 hour unit hydrograph is given by a rectangle whose base is 4 hours and height is 0.25/hour. Construct an S-hydrograph using this UH. [6]
6. a) Analysis of the annual flood peak of a river for 43 years yielded a mean of 330m³/s and a standard deviation of 187 m³/s. A proposed water control project on this river is to have an expected life of 50 years. Policy decision of the project allows an acceptable reliability of 85%. Using Gumbel's method, recommend the flood discharge for this project. [9]

A table for reduced mean ($\bar{y}_n$) and reduced standard deviation (S_n) is given below:

N	40	41	42	43	44	45
$\bar{y}_n$	0.5436	0.5442	0.5448	0.5453	0.5458	0.5463
S_n	1.1413	1.1436	1.1458	1.1480	1.1499	1.1519

- b) Explain log pearson III distribution and its use in the prediction of flood. [5]

7. For what purpose time area method is used? Explain time area method using a time area histogram of a catchment and a set of effective rainfall hydrograph over it. Comments on its drawbacks. [1+5+2]

SATURATION VAPOR PRESSURE OF WATER

Temperature		Saturation vapor pressure, e_s		Slope (mm Hg/°F)
°C	°F	mb	mm of Hg	
0	32	6.11	4.58	0.30
5.0	41.0	8.72	6.54	0.45
7.5	45.5	10.37	7.78	0.54
10.0	50.0	12.28	9.21	0.60
12.5	54.5	14.49	10.87	0.71
15.0	59.0	17.05	12.79	0.80
17.5	63.5	20.00	15.00	0.95
20.0	68.0	23.38	17.54	1.05
22.5	72.5	27.25	20.44	1.24
25.0	77.0	31.67	23.76	1.40
27.5	81.5	36.71	27.54	1.61
30.0	86.0	42.42	31.82	1.85
32.5	90.5	48.89	36.68	2.07
35.0	95.0	57.07	42.81	2.35
37.5	99.5	64.46	48.36	2.62
40.0	104.0	73.14	55.32	2.95
45.0	113.0	94.91	71.20	3.66

MEAN MONTHLY SOLAR RADIATION INCIDENT AT THE EARTH'S OUTER SPACE (EXTRATERRESTRIAL RADIATION), L , IN MM OF EVAPORABLE WATER/DAY, IN NORTHERN HEMISPHERE WITH $L = 560 \text{ CAL/G}$

Month	North latitude (°N)									
	90°	80°	70°	60°	50°	40°	30°	20°	10°	0°
January	—	—	—	1.3	3.6	6.0	8.5	10.8	12.8	14.5
February	—	—	1.1	3.5	5.9	8.3	10.5	12.3	13.9	15.0
March	—	1.8	4.3	6.8	9.1	11.0	12.7	13.9	14.8	15.2
April	7.9	7.8	9.1	11.1	12.7	13.9	14.8	15.2	15.2	14.7
May	14.9	14.6	13.6	14.6	15.4	15.9	16.0	15.7	15.0	13.9
June	18.1	17.8	17.0	16.5	16.7	16.7	16.5	15.8	14.8	13.4
July	16.8	16.5	15.8	15.7	16.1	16.3	16.2	15.7	14.8	13.5
August	11.2	10.6	11.4	12.7	13.9	14.8	15.3	15.3	15.0	14.2
September	2.6	4.0	6.8	8.5	10.5	12.2	13.5	14.4	14.9	14.9
October	—	0.2	2.4	4.7	7.1	9.3	11.3	12.9	14.1	15.0
November	—	—	0.1	1.9	4.3	6.7	9.1	11.2	13.1	14.6
December	—	—	—	0.9	3.0	5.5	7.9	10.3	12.4	14.3

MEAN MONTHLY VALUES OF POSSIBLE SUNSHINE HOURS, N

Latitude north (°N)	Month											
	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
0°	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1
10°	11.6	11.8	12.1	12.4	12.6	12.7	12.6	12.4	12.9	11.9	11.7	11.5
20°	11.1	11.5	12.0	12.6	13.1	13.3	13.2	12.8	12.3	11.7	11.2	10.9
30°	10.4	11.1	12.0	12.9	13.7	14.1	13.9	13.2	12.4	11.5	10.6	10.2
40°	9.6	10.7	11.9	13.2	14.4	15.0	14.7	13.8	12.5	11.2	10.0	9.4
50°	8.6	10.1	11.8	13.8	15.4	16.4	16.0	14.5	12.7	10.8	9.1	8.1

Exam.	Regulation		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Normal graph papers will be provided.
- ✓ Assume suitable data if necessary.

- 3 1. What is hydrological cycle? Draw a neat sketch of the cycle showing all components. [1+3]
- 4 2. a) How would you determine optimum number of rain gauges to be installed in a given catchment? [6]
- 3 b) Explain Intensity Duration Curve and Depth Area Curve. [6]
- 6 3. a) What is the difference between potential evapotranspiration (PET) and Actual evapotranspiration (AET)? Explain the penman's method for the estimation of PET from an area. [2+4]
- 6 b) The infiltration of a catchment can be represented by the equation $f = 15 + 50e^{-0.9t}$. If the rainfall intensity of 45mm/hr occurs continuously for 10 hour from a catchment of area 12km², calculate [2+2+2+2]
- i) Total runoff volume generated from that catchment
- ii) Total infiltration volume at the period
- iii) Calculate time from the start of rainfall from which runoff started
- iv) Show your all (above three) results in infiltration curves
- 2 4. a) The stage and discharge data of a river are given below. Derive the equation of rating curve (stage-discharge relationship) to predict the discharge for a given stage. Assume the value of stage for zero discharge as 161.0m. [8]

Stage (m)	161.3	161.7	161.9	162.8	163.4	163.8	164.5	165.4	165.7
Discharge (m ³ /s)	30	120	210	450	650	825	900	1000	1050

- 4 b) Describe the principle of slope-area method for the measurement of flood discharge in a stream. Explain the procedure to compute peak discharge using method. [3+3]
- 7 5. A 1 hour unit hydrograph of a small catchment is triangular with peak value of 3.6 m³/s occurring at 2 hours from the start and a base time of 6 hours. Following urbanization over a period of two decades, the infiltration index ϕ has decreased from 0.7cm/h to 0.4cm/h. Also one hour unit hydrograph has now peak of 6.0 m³/s at 1 hours from start and time of base is 4 hours. If a design storm has intensities of 4cm/hour and 3cm/h for two consecutive one hour intervals. [14]
- a) Estimate the percentage increase in the peak storm runoff due to urbanization.
- b) The volume of flood runoff due to urbanization.
- 2 6. The project life of headworks is 50 years. The flood discharges at risk 63.58303% is 4200 cumecs. The average flood is 3500 cumec, which is derived from long term historical data using Gumbel distribution. Calculate the discharge from 500 year return period and risk 39.49939%. Prepare a Gumbel graph paper using normal arithmetic graph paper. Plot these three discharges on Gumbel paper. [14]
- 4 7. What is linear reservoir? Explain the procedure to obtain Clark UH from time area method. [2+6]

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology (CE 606)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) What is a water balance equation? Write its significance in engineering hydrology. [4]

- b) Estimate the average depth of precipitation over the drainage basin with following data. [4]

Isohyetals (Intervals, cm)	15-12	12-9	9-6	6-3	3-1
Inter-isohyetal area (km ²)	92	128	120	175	85

- c) A catchment has seven rain gauges. In a year the annual rainfalls in cm, recorded at these gauges are 130, 142.1, 118.2, 108.5, 165.2, 102.1 and 146.9. For a 5% error in the estimation of mean rainfall, calculate the minimum number of additional rain gauges required to be established in the watershed. [4]

- d) Explain the use of Double Mass Curve with sketch. [4]

2. a) Discuss briefly the various hydrological losses from precipitation. [4]

- b) Estimate daily evaporation from a lake at 30°N for April by Penman method with following mean monthly data. [6]

T _a , Kelvin	RH, %	n, hrs	u ₂ , m/s	H _a , mm/ day	N, hrs
293	65	10	1.2	14.8	12.9

- c) A storm with 20 cm of precipitation produced a surface runoff of 12cm. Estimate the Φ index of the storm. [4]

Storm time(hr)	1	2	3	4	5	6	7	8
Rainfall (cm/hr)	0.7	2.2	3.0	4.6	3.6	3.2	2.0	0.7

3. a) Define rating curve and explain its uses in hydrology. [4]

- b) Determine the stage corresponding to zero discharge for following data of a smooth rating curve. [5]

Stage (m)	20.80	21.42	21.95	23.37	23.00	23.52	23.90
Discharge (m ³ /s)	100	200	300	400	600	800	1000

- c) Differentiate Velocity-Area and Slope-Area methods of flow estimation. [5]

4. The ordinates of a 6-h unit hydrograph are given below. A storm had three successive 6-h intervals of rainfall magnitude of 3.0, 5.0 and 4.0cm respectively. Assuming an index of 0.20cm/h and a base flow of 30m³/s. Determine and plot the resulting hydrograph of flow. [14]

Time (hr)	0	3	6	9	12	18	24	30	36	42	48	54	60	66
6-h UH ordinate m ³ /s	0	150	250	450	600	800	700	600	450	320	200	100	50	0

5. a) Briefly describe the procedure of flood estimation by Log Pearson III method. [5]

- b) A highway-bridge has to be designed with an expected life of 50 years and an allowable flood risk of 4%. The flood data of bridge site were well fitted to Gumbel EV distribution and discharges for 50 and 300 years return period are found to be 150 and 650 m³/sec respectively. Estimate the frequency and magnitude of design flood for the bridge.
6. A drainage basin has area = 157 km², storage constant K = 9.5 h and time of concentration = 7 h. The following isochrones area distribution data are available. Determine the IUH of this catchment.

Time(h)	0-1	1-2	2-3	3-4	4-5	5-6	6-7
Inter-isochrone area (km ²)	10	38	20	45	32	10	2

[9]

[8]

Exam.	Regular / Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / I	Time	3 hrs.

Subject: - Engineering Hydrology

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt any Five questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

- 1/ The following are the ordinates of the hydrograph of flow from a catchment area of 700km² due to a 6-h rainfall. [16]

Time(Hour)	0	6	9	12	18	24	30	33	36	42	48	54	60	66	72
Discharge(m ³ /s)	40	65	140	215	360	400	350	330	270	205	145	100	70	50	40

- a) Derive the ordinates of 6-h unit hydrograph
- b) Calculate the flood hydrograph for two successive storms of 9.5 and 12.5 cm of 6 hours duration rainfall and an average storm loss of 0.25cm/hr
- 2/ a) Describe the statistical approach for estimating the floods of required frequencies (design floods) when annual maximum floods of few years are available. [8]
- b) Compute the stream flow from following data. The calibrated equation of current meter is: $V = 0.045 + 0.76N$, where V is in m/sec and N is revolution/sec. [8]

Distance from bank (m)	0	0.6	1.5	2.5	3.5	5.0	6.0	7.0	7.5
Depth (m)	0	0.3	0.75	1.2	1.7	1.3	0.7	0.3	0
No. of Revolutions	0	15	95	110	120	110	80	20	0
Time (sec)	0	45	85	95	90	100	70	40	0

3. a) Describe various forms of precipitation. [4]
- b) A 4 hour storm occurs over a 80km² watershed. The details of the catchment are as follows. [12]

Sub basin(km ²)	ϕ index (mm/h)	Hourly Rainfall (mm)			
		1 st hour	2 nd hour	3 rd hour	4 th hour
15	10	16	48	22	10
25	15	16	42	20	8
35	21	12	40	18	6
5	16	15	42	18	8

Calculate the runoff from the catchment and the hourly distribution of the effective rainfall for the whole catchment.

4. a) In a recuperation test, the static water level in an open well was depressed by pumping by 3m and it recuperated 1.5m in 1 hour. If the diameter of the well is 3.0m and the safe working depression head is 2.4m, find out the average yield of the pump. [8]
- b) Describe the hydro-geo-morphological characteristics of rivers with sketches. [8]

5. a) Calculate the discharge of a stream having a high water surface elevations noted at two sections A and B, 10km apart. These elevations and other salient hydraulic properties are given below. [8]

Section	Water Surface elevation (m)	Area of x-section (m^2)	Hydraulic Radius (m)
A	104.77	73.293	2.733
B	104.500	93.375	3.089

The eddyless coefficient is 0.3 for gradual expansion, 0.1 for gradual contraction and Manning's roughness is 0.02.

- b) How is the double mass curve technique used to check the consistency and adjust the rainfall at a suspicious station? Explain with sketch. [8]
6. a) What is a rating curve? Write down a standard equation for a rating curve. Explain in detail the procedure to estimate the parameters of that rating equation. [1+1+8]
- b) Prepare a Gumbel probability paper from an ordinary graph paper provided to you. [6]

Exam.	Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / II	Time	3 hrs.

Subject: - Engineering Hydrology

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt any Five questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. A 1-hour unit hydrograph of a small catchment is triangular with peak value of $3.6 \text{ m}^3/\text{s}$ occurring at 2 hours from the start and a base time of 6 hours. Following urbanization over a period of two decades, the infiltration index ϕ has decreased from 0.7 cm/h to 0.4 cm/h . Also one hour unit hydrograph has now peak of $6.0 \text{ m}^3/\text{s}$ at 1 hour from start and time of base is 4 hours. If a design storm has intensities of 4 cm/hour and 3 cm/h for two consecutive one hour intervals, estimate [16]

- a) the percentage increase in the peak storm runoff due to urbanization.
- b) the volume of flood runoff due to urbanization.

2. a) Briefly describe the role of ground water in irrigation development. [6]

- b) Calculate the daily potential evaporation by Penman method using following data: Latitude = 27.5°N , Elevation = 1400 m above mean sea level, mean monthly temperature = 10°C , relative humidity = 70% , mean observed sunshine hour = 7 h , wind velocity at 2 m height = 80 km/day , the ground surface is observed with green grass, Albedo = 0.15 . Saturated vapor pressure at 10°C = 11.4 mm of hg , Slope of saturated vapor pressure = $1.24 \text{ mm}/^\circ\text{C}$, Psychrometric constant = $0.49 \text{ mm}/^\circ\text{C}$, and Boltzman constant = $2.01 \times 10^{-9} \text{ mm/day}$. [10]

3. a) In a 140-minute storm, the following rates of rainfall were observed in successive 20-minute intervals: $3.0, 3.0, 9.0, 6.6, 1.2, 1.2$ and 6.0 mm/hr . Assume the ϕ index value as 3.0 mm/hr and an initial loss of 0.8 mm . Determine the total rainfall, net runoff and w-index for the storm. [6]

- b) For a drainage basin of 600 km^2 , isohyets drawn for a storm gave the following data: [4]

Isohyets intervals (cm)	15-12	12-9	9-6	6-3	3-1
Inter-isohyets area (km^2)	92	128	120	175	85

Find the average rainfall over the basin.

- c) What is rating curve? What are the factors affecting run off? Explain. [2+4]
4. a) Followings are the data obtained from a stream gauging station. A current meter with a calibration equation $V = (0.32N + 0.032) \text{ m/s}$ where N = revolutions per second, was used to measure the velocity at 0.6 depth. Calculate the discharge in the stream. [10]

Distance from right bank (m)	0	2	4	6	9	12	15	18	20	22	23	24
Depth (m)	0	0.5	1.1	1.95	2.25	1.85	1.75	1.65	1.50	1.25	0.75	0
No. of Revolutions	0	80	83	131	139	121	114	109	92	85	70	0
Time (sec.)	0	180	120	120	120	120	120	120	120	120	150	0

- b) Explain slope area method for estimating discharge of a stream. [6]

5. Using 30 years data and Gumbel's method the flood magnitudes, for return periods of 100 and 50 years for a river are found to be 1200 and 1060 m³/sec respectively. ($\bar{y}_n = 0.5362$ and $S_n = 1.1124$). [16]

- a) Determine the mean and standard deviation of the data used.
- b) Estimate the magnitude of a flood with a return period of 500 years.
- c) What are the 95% confidence limits for this estimate if $f(95\%) = 1.96$.
- d) What is the probability of the flood equal to or greater than a 500-year flood occurring three times in the next 10 years?

6. a) A 30cm well fully penetrates an unconfined aquifer of saturated depth 25m. When a discharge of 2100 lpm was being pumped for a long time, observation wells at radial distances of 30 and 90m indicated drawdowns of 5 and 4m respectively. Estimate the co-efficient of permeability and transmissibility of the aquifer. What is the drawdown at the pumping well? [10]

- b) Describe the four important hydro-geomorphological characteristics of a river. [6]

Exam.	Regular/Back		
Level	BE	Full Marks	80
Programme	BCE	Pass Marks	32
Year / Part	III / II	Time	3 hrs.

Subject: - Engineering Hydrology

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt any Five questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. Unit hydrograph of 3h duration from a catchment area of 524.88 ha has peak discharge value after 9 hours from the start of the storm. It has half of the peak discharge value at 3 hours and 15 hours after the start of storm respectively. If time base (t_b) is 30 hours, constitute the unit hydrograph and calculate the flood hydrograph from the following rainfall data. Assume the Phi index (ϕ) as 0.333 cm/hour and base flow as 20 cumecs. [16]

Time (hours)	0	6	9	12
Cumulative Rainfall (cm)	0	12	12	23

2. The project life of a headworks is 50 years. The flood discharges at the risks 63.6% and 39.5% are 4200 cumecs and 5800 cumecs respectively, which is derived from long term historical data using Gumbel distribution. Calculate the discharge from 500 years return period. Plot these three discharges on Gumbel paper. [16]
3. a) Write down the factors affecting evapotranspiration. [4]
- b) Calculate the potential evapotranspiration for an area over Kathmandu in the month of February by Penman Method. The following data is available. [12]

Mean Monthly Temperature : 12.5°C

Mean RH : 70%

Mean Sunshine Hours : 7 h

Potential Sunshine Hours : 11.9 h

Wind Velocity at 2m Height = 120 km/day

Albedo : 0.15

Upper Terrestrial Solar Radiation : 9mm of water/day

Other values:

Latitude : 28.50

Longitude : 84.50

Saturated Vapor Pressure at 12.5°C : 11.4mm of Hg

Slope of Saturated Vapor Pressure : 1.24mm/°C

Psychrometric Constant : 0.49mm/°C

Boltzman Constant : 2.0×10^{-9} mm/day

4. a) Depth of a triangular shaped river is 3m. Its top width is 10m. The maximum depth of the river is at 4m from the one side. The top velocity of the river measured at 3.0 and 7.0m from the same side are 1.5m/s and 1.8m/s respectively. Calculate the discharge of the river. [8]
- b) Explain slope area method for discharge calculation. [8]
5. a) Explain different types of rain gauges with neat sketch. [8]
- b) There are four rain gauges at four corner of a rectangle. The two sides of rectangle are 100km and 150km. The yearly rainfalls of four gauges are 1200mm, 1300mm, 1500mm and 1100mm respectively. Calculate the average rainfall by Theissen polygon method. [4]
- c) Explain Φ (Phi)-index and W-index. [4]
6. a) Explain hydrological cycle. [4]
- b) Define floods. Enumerate the causes, effects and mitigation of floods. [1+5]
- c) In a recuperation test, the static water level in an open well was depressed using pumps by 3m and it recuperated 1.5m in 1 hour. If the diameter of the well is 3.0m and the safe working depression head is 2.4m, find out the average specific yield of the soil and specific capacity of the soil. [6]