


# SeamGrip Fastener Installation Guide

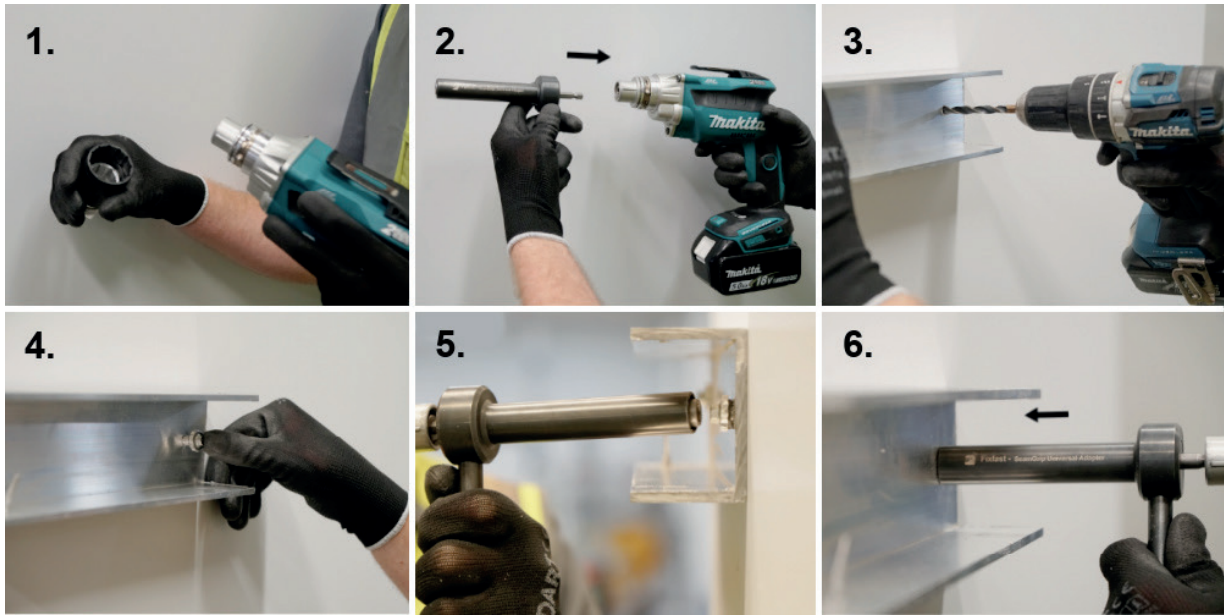

## Installing SeamGrip fasteners with drill or screwgun.

Installation is fast and easy with the SeamGrip Universal Adapter, designed to fit a variety of drills or screwguns.

1. Drill 8mm hole in application.
2. Remove standard depth setting sleeve assembly from the tool.
3. Insert SeamGrip Universal Adapter shaft into the chuck.
4. Insert SeamGrip fastener into the hole.
5. Pull the adapter handle back and use the drivebar to locate the fastener hex head.
6. Once located, push the handle forward and adjust until the fastener flange is engaged with the outer sleeve of the tool.
7. Use the variable trigger speed at approx half power (1000-1500rpm) on the screwdriver (or drill) to install the fastener. The SeamGrip bolt is tightened to cause the sleeve to draw up and form four clamping lines, which bring the materials being fastened together. The fastener is fully seated when the tool begins to ratchet and the fastener stops turning.

Merlin House  
Seven Mile Lane  
Borough Green  
Sevenoaks  
Kent  
TN15 8QY

**Enquiries**  
0800 304 7616  
**International**  
+44 (0) 1732 882387  
**Email**  
sales@fixfast.com

