

DuraMet®

Ring shank nails

Application

- For fastening DuraMet cleats into timber

Key Features

- Genuine A2/304 stainless steel for durability
- Ring shank design for increased pull-out resistance


Datasheet

Document Reference: [DS-FS-RSN-7.17/01](#)

01 FASTENER SYSTEMS
DuraMet® ring shank nails

DuraMet® ring shank nails

Code	Length (mm)	Diameter (mm)
RSN-SS-3.35 x 25	25	3.35

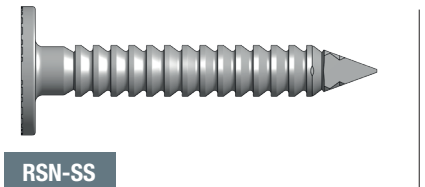

Pull out values

The shape of the shank is the determining factor and comparative tests give the following results:

Smooth shank 35Kg
Annular shank: 90Kg

Tests carried out using 2.70 dia x 30mm long nails driven 75% into timber

An annular ring shank nail has to break the fibres of the wood when being driven, therefore resulting in higher pull out values.

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY*

©Fixfast September 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.



Certificate Number 10905
ISO 9001: 2008
ISO 14001: 2004
BS OHSAS 18001: 2007