

DukMat™ Linear TPO

Rooftop walkways

Application

- To provide safe access for maintenance of roof top services and frequently accessed areas

Key Features

- Quick and easy to install - 10m roll can simply be rolled out across the roof
- No fixing required - loose lay product remains in place in hurricane force winds
- Provides permanent slip resistance
- Protects the roof membrane or material from being damaged, pierced or worn

Datasheet


Document Reference: [DS-RP-DMTPO-7.17/01](#)

04 ROOFTOP PRODUCTS
DukMat™ Linear TPO rooftop
walkways

Compatibility Chart

	PVC	TPO	TPE	EPDM	Bitumen	GRP	Coated Steel
DMAT-L-TPO	√	√	√	√	√	√	√

Code	Width (mm)	Length (m)	Height (mm)	Weight (kg/m ²)	Colour
DMAT-L-TPO-750-W	750	10	14	5.2	White

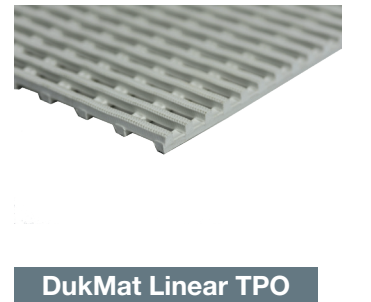

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY*

©Fixfast September 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.



Certificate Number 10905
 ISO 9001: 2008
 ISO 14001: 2004
 BS OHSAS 18001: 2007