

DukMat™ Solar PVC

Rooftop walkways

Application

- To provide safe access around solar arrays on flat roofs.

Key Features

- Narrow, 450mm wide walkway fits neatly between and around solar panels
- Quick and easy to install - 10m roll can simply be rolled out across the roof
- No fixing required - loose lay product remains in place in hurricane force winds
- Provides permanent slip resistance
- Protects the roof membrane or material from being damaged, pierced or worn
- Edging strip available - provides visual awareness

Datasheet

Document Reference: S-RP-DMS-7.17/01

04 ROOFTOP PRODUCTS
DukMat™ Solar PVC rooftop
walkways


DukMat™ Solar PVC rooftop walkways

Compatibility Chart

	PVC	TPO	TPE	EPDM	Bitumen	GRP	Coated Steel
DMAT-S-PVC	√	-	-	-	√	√	√

Code	Width (mm)*	Length (m)	Height (mm)	Weight (kg/m ²)	Colour*
DMAT-S-PVC-450-G	450	10	14	6.6	Grey
DMAT-S-PVC-450-B	450	10	14	6.6	Black

* Bespoke widths and colours are available on request. Please contact the Customer Service Team to discuss your requirements.

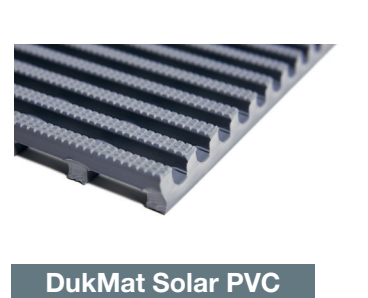

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY*

©Fixfast September 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.



Certificate Number 10905
 ISO 9001: 2008
 ISO 14001: 2004
 BS OHSAS 18001: 2007