



Expanding foam tape

XFT

Applications

- For sealing and isolating purposes

Key Features


- Impregnated self-adhesive foam tape
- When compressed to 25% of expanded thickness will provide a weatherseal
- Supplied pre-compressed to approx 15% of its expanded thickness
- Has an acrylic based resin release paper

Expanding foam tape

| Substrate | | | | | | | |
|-------------------------|-------|-----------|-----------|--------------|------------------|-----------------------------|-----------------------|
| Tape | Steel | Aluminium | GRP / PVC | Fibre cement | Glass (uncoated) | Timber (painted or stained) | Concrete / Brick-work |
| XFT Expanding Foam Tape | ✓ | ✓ | ✓ | - | ✓ | ✓ | ○ |

✓ = Recommended ○ = Possible

| Code | Expanded thickness (mm) | Roll width (mm) | Roll length (m) | Initial thickness (mm) | Colour |
|--------------------|-------------------------|-----------------|-----------------|------------------------|--------|
| XFT-9 x 12 x 12.5 | 9 | 12 | 12.5 | 1.75 | Grey |
| XFT-10 x 20 x 12.5 | 10 | 20 | 12.5 | 2.00 | |
| XFT-14 x 20 x 10 | 14 | 20 | 10 | 2.00 | |
| XFT-33 x 25 x 4.3 | 33 | 25 | 4.3 | 6.00 | |

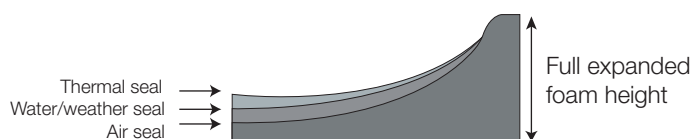

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY*

©Fixfast July 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.



Certificate Number 10905
 ISO 9001: 2008
 ISO 14001: 2004
 BS OHSAS 18001: 2007