


Maximum reliability. Minimum fuss.



Technical Data Sheet

EdgeGuard Premium

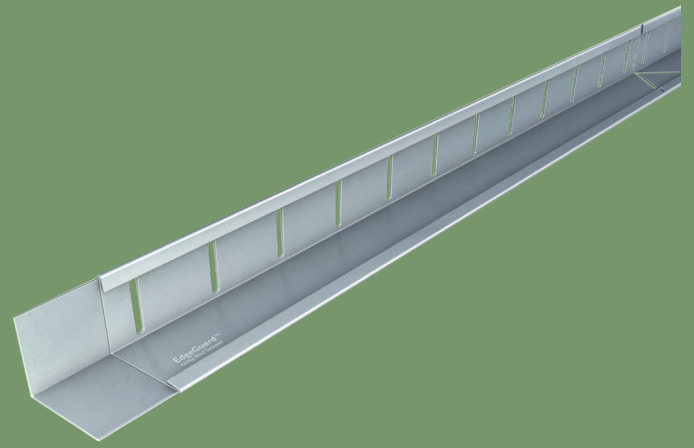

Living Roof Systems

Application

- + Designed for use in variety of green or ballasted roof applications
- + Can be used either as an edge restraint, or where a solution for retaining or separating the roof garden materials is required.

Key Features

- + Supplied in 2.4 M lengths - quick installation
- + Lightweight and robust
- + Can be cut to length
- + Available powder coated in any colour
- + Connectors not normally required
- + Manufactured from aluminium - long lasting and aesthetically pleasing

Technical Data

Code	Description	Height (mm)	Width of base (mm)	Material thickness (mm)	Length of section (mm)
EG-A-P-50/2400	Aluminium, pre-punched and profiled	50	100	1.2	2400*
EG-A-P-75/2400		75	100	1.2	
EG-A-P-100/2400		100	100	1.2	
EG-A-P-120/2400		120	100	1.2	
EG-A-P-150/2400		150	150	1.2	
EG-A-P-200/2400		200	150	1.5	
EG-A-P-250/2400		250	200	1.5	
EG-A-P-300/2400		300	200	1.5	

*This is the length once assembled i.e. the attached male connectors are approx 70mm which slot into the next section



Merlin House
Seven Mile Lane
Borough Green
Sevenoaks
Kent
TN15 8QY

Enquiries

0800 304 7616

International

+44 (0) 1732 882387

Fax

0845 450 7486

Email

info@fixfast.com



Certificate number 10905
ISO 9001, ISO 14001
ISO 45001