

SeamFast®

Rooflight stitchers

Application

- For stitching translucent rooflight materials
- Securing sidelaps, barge boards, ridge cappings and closures for fibre cement roof systems

Key Features

- Flexible EPDM sleeve allows for sheet expansion and contraction
- EPDM sleeve - UV resistant

Datasheet

Document Reference: DS-FS-SF-7.17/01


01 FASTENER SYSTEMS
SeamFast® Rooflight stitchers

SeamFast® Rooflight stitchers

For trapezoidal sheeting

Code	Head style	Washer diameter (mm)	Sleeve length (mm)	Maximum grip range (mm)	Material
19-S	8mm hex	19	25	10	A2 Stainless Steel
19-L	8mm hex	19	38	25	A2 Stainless Steel
MF19-S	11mm bi-hex	19	28	10	A2 Stainless Steel


When installing SeamFast, the material must be pre-drilled with a 9.5mm clearance hole

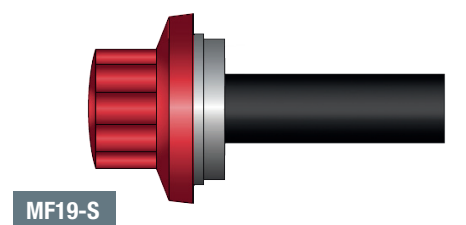

For sinusoidal sheeting

Code	Head style into steel (mm)	Washer diameter (mm)	Sleeve length (mm)	Maximum grip range (mm)	Material
28-S	8mm hex	28	25	10	Carbon Steel
28-L	8mm hex	28	38	23	Carbon Steel

When installing SeamFast, the material must be pre-drilled with a 9.5mm clearance hole

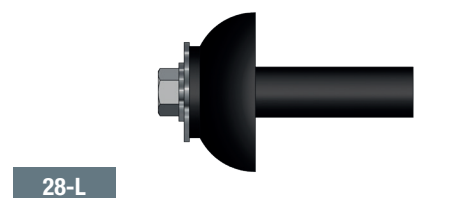

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY*

©Fixfast September 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.



Certificate Number 10905
ISO 9001: 2008
ISO 14001: 2004
BS OHSAS 18001: 2007