



# Expanding foam tape

XFT

## Applications

- For sealing and isolating purposes

## Key Features



- Impregnated self-adhesive foam tape
- When compressed to approx 40% of expanded thickness will provide a weatherseal
- Supplied pre-compressed to approx 15% of its expanded thickness
- Has an acrylic based resin release paper

# Expanding foam tape

Substrate							
Tape	Steel	Aluminium	GRP / PVC	Fibre cement	Glass (uncoated)	Timber (painted or stained)	Concrete / Brick-work
XFT Expanding Foam Tape	✓	✓	✓	-	✓	✓	○

✓ = Recommended    ○ = Possible

Code	Expanded thickness (mm)	Roll width (mm)	Roll length (m)	Colour
XFT-9 x 12 x 12.5	9	12	12.5	Dark Grey
XFT-10 x 20 x 12.5	10	20	12.5	
XFT-14 x 20 x 10	14	20	10	
XFT-17 x 20 x 8.0	17	20	8.0	
XFT-26 x 25 x 5.6	26	25	5.6	
XFT-33 x 25 x 4.3	33	25	4.3	
XFT-44 x 25 x 3.3	44	25	3.3	

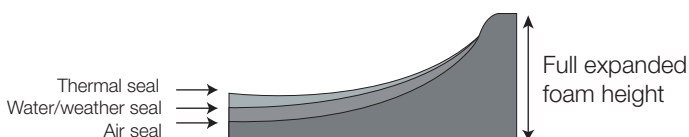

XFT

**FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY**  
**T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com**

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.  
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY*

*©Fixfast July 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.*



Certificate Number 10905  
 ISO 9001: 2008  
 ISO 14001: 2004  
 BS OHSAS 18001: 2007