





FIXFAST

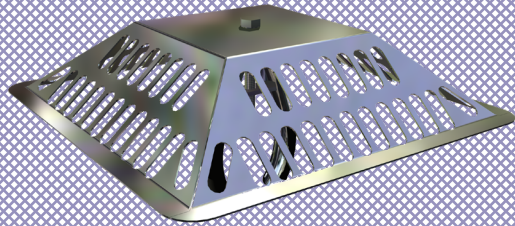

FarBo[®] leafguards

Leafguards for use with rainwater outlets

Application

- For use with FarBo[®] rainwater outlets, to prevent the blocking of the outlet by debris

Key Features

- Many types available - to suit most applications
- Durable and hard wearing

Datasheet

Document reference: DS-RDS-LG-7.17/02

03 ROOF DRAINAGE SYSTEMS
Leafguards

FarBo® leafguards

Universal leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-UG-210	50-160	210 x 210	FloDrain/DuoDrain (with exception of FO-FLO-40) DuoDrain
FO-UG-325	160-250	325 x 325	

Stainless steel universal guard is solid and effective and securely clamps to the inside of the outlet stem. It is also tamper proof, as it can only be removed with the correct tool



Universal leafguard

CasCade leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-CASCADE	50-160	260 x 260	FloDrain/DuoDrain (with exception of FO-FLO-40) DuoDrain

The FarBo CasCade is a new, high performance leaf guard, manufactured from 304 grade stainless steel. Designed for use with standard size FarBo roof outlets, the new design dramatically increases the flow rate by over 50% compared to standard leaf guards. The leaf guard is also tamper resistant, as it can only be removed from the outlet by using a spanner.



CasCade leafguard

Monsoon leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-MONSOON	50-160	210 x 210	FloDrain/DuoDrain (with exception of FO-FLO-40) DuoDrain

New development designed to maximise flow rates through standard size drainage systems. Tamper proof, as it can only be removed with the correct tool.



Monsoon leafguard

Click leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-CLICK	70-180	205	FloDrain/DuoDrain sizes FO-FLO-70 through to FO-FLO-160 DuoDrain

Provides solution for applications where maintenance is required on a regular basis. Simple ratchet system allows quick and tool free removal of guard.



Click leafguard

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218. The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY

© Fixfast July 2017. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.




Certificate number 10905
 ISO 9001, ISO 14001
 ISO 45001

Cylindrical leafguard

Code	To suit pipe size (mm)	Guard size (mm)	Guard height (from deck level - mm)	For use with
FO-CG-40	40	40	110	FloDrain DuoDrain
FO-CG-50	50	50		
FO-CG-62	62	62		
FO-CG-70	70	70		
FO-CG-75	75	75		
FO-CG-90	90	86		
FO-CG-95	95	95		
FO-CG-110	110	110		
FO-CG-125	125	125		
FO-CG-145	145	145		
FO-CG-160	160	160		

Stainless steel cylindrical leafguard ideal for use in restricted areas and for ballasted roofs. Eleven standard sizes are available, please specify when ordering.



Cylindrical leafguard

Balcony leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-BG	50-110	130 x 130	FloDrain/DuoDrain within the sizes below: 50-110

Very low profile, making it suitable for balconies and other areas which are exposed to light foot traffic



Balcony leafguard

Wire ball leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-WB	50-110	132 x 132	FloDrain/DuoDrain within the sizes below: 50-160
FO-LWB	110-160	185 x 185	

Plastic coated wire ball leafguard is effective and economical. Prevents small debris from entering the roof outlets.



Wire ball leafguard

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0800 304 7616 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY

© Fixfast June 2022. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.



Certificate number 10905
 ISO 9001, ISO 14001
 ISO 45001

ParaDrain leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-PG-50-225	50	225 x 100 x 140	FO-PARAPET-50
FO-PG-225	75-110	225 x 100 x 140	FO-PARAPET-75/90/110
FO-PG-325	215-300 SQ	325 x 100 x 140	FO-PARAPET-215/300
Stainless steel parapet leafguard prevents blocking of outlet by debris			



ParaDrain leafguard

Flat ParaDrain leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-FPG-500	500	645 x 125	FO-PARA-SQ-500
Stainless steel flat parapet leafguard prevents blocking of outlet by debris			



Flat ParaDrain leafguard

Para Click leafguard

Code	To suit pipe size (mm)	Guard size (mm)	For use with
FO-PG-CLICK	50-110	230 x 100 x 225	ParaDrain outlets
Provides solution for applications where maintenance is required on a regular basis. Simple ratchet system allows quick and tool free removal of guard.			



Para Click leafguard

Ballast leafguard

Code	To suit pipe size (mm)	Guard size (mm)	Guard height (from deck level - mm)	For use with
FO-BSG-62	62	62	260	FloDrain DuoDrain
FO-BSG-70	70	70		
FO-BSG-75	75	75		
FO-BSG-90	90	90		
FO-BSG-95	95	95		
FO-BSG-110	110	110		
Stainless steel cylindrical leafguard ideal for use on ballasted roofs. Six standard sizes are available, please specify when ordering.				



Ballast leafguard

FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY
T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY

© Fixfast July 2017. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.



Certificate number 10905
 ISO 9001, ISO 14001
 ISO 45001