


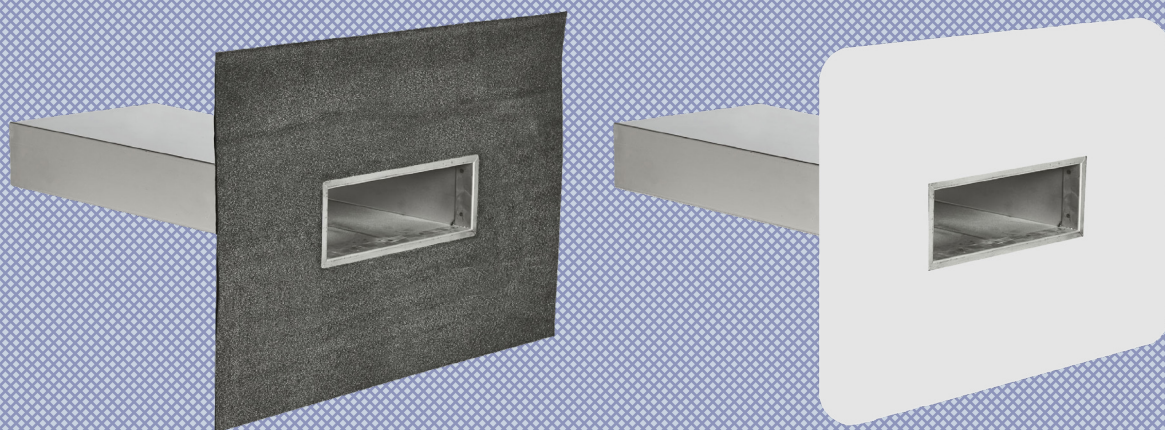

FarBo® Horizontal safety drain

Stainless steel emergency outlet

Application

- Installed at a specified level above the roof surface and is used as a safety/overflow outlet.

Key Features

- 600mm long spigot manufactured from durable stainless steel
- Factory bonded flange in SBS or PVC
- Membrane attached to the outlet allows for easy installation
- Suitable for use in new build or refurbishment applications

Datasheet


Document Reference: DS-FO-PARA-01.25/01

03 ROOF DRAINAGE SYSTEMS
FarBo® Horizontal safety drain


FarBo® Horizontal safety drain

Code	Membrane type	Membrane size	Spigot Width (mm)	Spigot Height (mm)	Spigot Length (mm)	Flow rates (l/s)*
FO-SAFETY-LB-215-PVC DK GY	PVC dark grey	445 x 298	215	70	600	2.02
FO-SAFETY-LB-215-PVC LT GY	PVC light grey	445 x 298	215	70	600	2.02
FO-SAFETY-LB-215-SBS	SBS	700 x 500	215	70	600	2.02

* As recommended by UK design standard BS EN 12056 : 3-2000 with a water depth of 35mm.

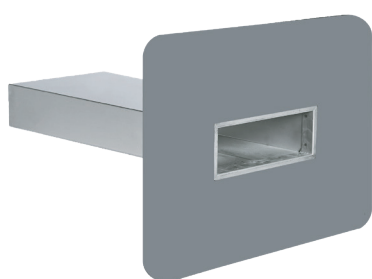

FO-SAFETY-LB-215-PVC DK GY

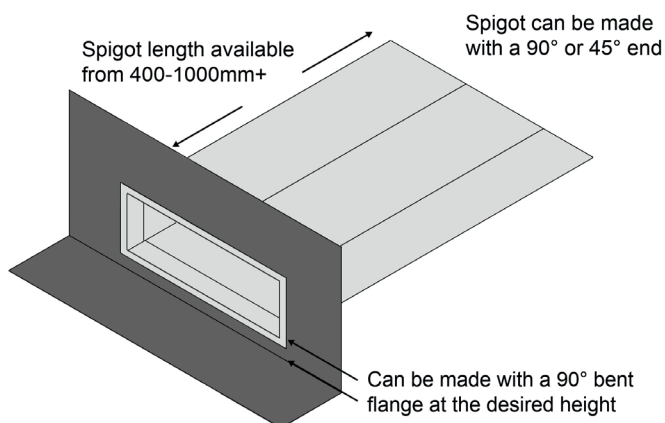

FIXFAST Ltd | Unit 6 | Frank Sando Way | Aylesford | Kent | United Kingdom | ME20 7NY
T: 0800 304 7616 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY



Certificate Number 10905
 ISO 9001: 2008
 ISO 14001: 2004
 BS OHSAS 18001: 2007