


RTG-AA-7.7 x 28



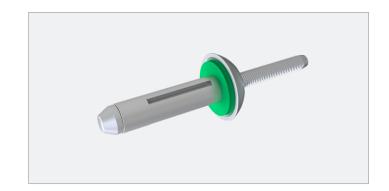

Application

Sheeting and cladding

Flashings, gutter, facias, soffits

Thin sheet applications

Suitable for height safety and access systems

Features & Benefits

Provides positive clamping force with no radial pressure or expansion

Slotted body spreads to form three-pronged bearing surface


Excellent material clamping across wide grip range

Neoprene washer provides watertight seal

Manufactured from 5056 aluminium

Fastener

Product Code	Body diameter (mm) 'a'	Drill size (mm)	Head diameter (mm) 'b'	Rivet length (mm) 'c'	Grip range (mm)	Shear N (mm)	Tensile N (mm)
RTG-LF-AA-7.7 x 28	7.7	8.0	19.0	28	1.1 - 9.5	6500	4650



Date generated: 10/10/2025

© FIXFAST Ltd 2025. All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. All rights reserved. Due to a policy of continuous development, FIXFAST reserves the right to change product specification and descriptions without notice. Subject to Fixfast's Terms & Conditions.