


# SafeSeal™ A-Grade Strip Sealant

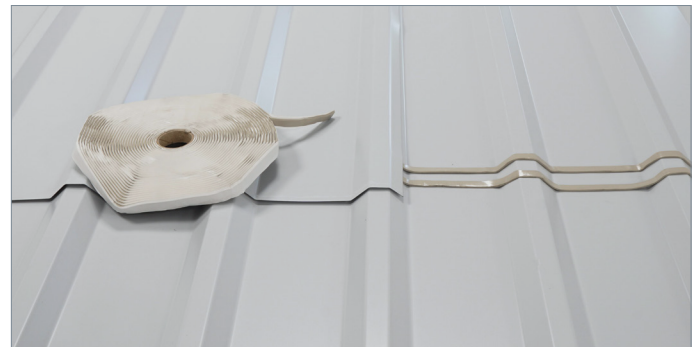

## A-Grade butyl strip sealant.

### Application

External Metal Sheetting - sealing end and side laps in steel and aluminium

Roofing systems

Metal Liner Sheetting - sealing end laps

Sealing rooflights

Sealing metal flashings

Ridge and eaves sealing in combination with foam fillers

Sealing penetrations to roof and wall cladding

### Key Features

25 year warranty (UK and Ireland only)

Outstanding service life

High tack product, providing excellent adhesion

Strong, flexible and designed specifically to accommodate movement

Provides a long-life, airtight seal to help buildings comply with Building Regulations

NFRC Technical Bulletin 36 Class A Rated - 3rd Party Accreditation

### Substrate Compatibility

Tape	Steel	Aluminium	GRP / PVC	Fibre Cement	Glass (uncoated)	Timber (painted or stained)	Fire resisting	Gutter joints
A-Grade butyl	✓	✓	✓	•	✓	✓	—	•

✓ = Recommended • = Compatible

Date generated: 03/12/2025

© FIXFAST Ltd 2025. All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. All rights reserved. Due to a policy of continuous development, FIXFAST reserves the right to change product specification and descriptions without notice. Subject to Fixfast's Terms & Conditions.

# SafeSeal™ A-Grade Strip Sealant

Code	Thickness x width (mm)	Roll length (m)	Rolls per carton
A - 1.5 x 9 x 30	1.5 x 9	30	24
A - 2 x 12 x 22.5	2 x 12	22.5	20
A - 3 x 9 x 15	3 x 9	15	12 / 24
A - 3 x 19 x 15 A	3 x 19	15	14
A - 3 x 50 x 15	3 x 50	15	6
A - 6 x 50 x 5	6 x 50	5	6
A - 4 x 18 x 12	4 x 18	12	14
A - 5 x 6 x 9.6	5 x 6	9.6	15 / 30
A - 4 dia x 12	4 diameter	12	15 / 30
A - 6 dia x 8	6 diameter	8	12 / 24
A - 8 dia x 6	9 diameter	6	10 / 20
A - 10 dia x 5	10 diameter	5	20

## Performance

	Nominal value	Test method
Dynamic tensile adhesion	30 N/cm <sup>2</sup>	H5
Dynamic shear adhesion	12 N/cm <sup>2</sup>	H15
90° Peel adhesion	7 N/cm <sup>2</sup>	H48
180° Peel adhesion	14 N/cm <sup>2</sup>	H41
Specific gravity	16 g/cm <sup>3</sup>	H6
Moisture vapour transmission rate	0.15 g/m <sup>2</sup> /24hr/mm	ISO9932 / BS ISO 15106
Service temperature range	-40 to +110°C	

Date generated: 03/12/2025

© FIXFAST Ltd 2025. All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. All rights reserved. Due to a policy of continuous development, FIXFAST reserves the right to change product specification and descriptions without notice. Subject to Fixfast's Terms & Conditions.