




Stainless Steel SSA4/316 Sealed Head Rivets




Application

Sheeting & Cladding
 Facade and rainscreen
 General construction

Key Features

Domed A4 stainless body with mandrel retained in body after setting
 Available in a wide range of RAL and BS colours
 Available with small rubber sealing washer under flange

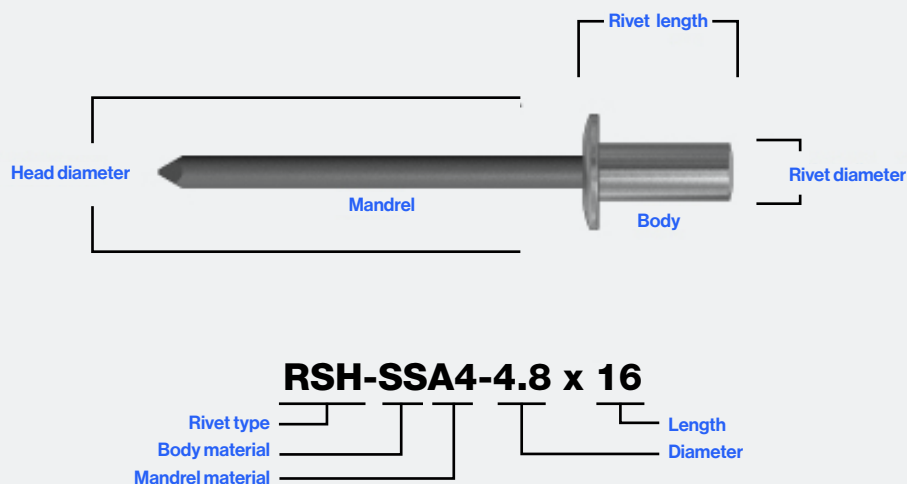

Stainless Steel SSA4/316 Sealed Head Rivets

Specification

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range (mm)	Shear (N)	Tensile (N)
RSH-SSA4-4.8 x 8	4.8	4.9	9.5	8	2.9	1.0-3.0	4000	4400
RSH-SSA4-4.8 x 8-W						0-2.0		
RSH-SSA4-(LAC)-4.8 x 10				10		4.0-5.5		
RSH-SSA4-(LAC)-4.8 x 10-W						3.0-4.5		
RSH-SSA4-(LAC)-4.8 x 12				12		6.0-8.0		
RSH-SSA4-(LAC)-4.8 x 12-W						5.0-7.0		
RSH-SSA4-(LAC)-4.8 x 16				16		6.5-10.5		
RSH-SSA4-(LAC)-4.8 x 16-W						5.5-9.5		
RSH-SSA4-(LAC)-4.8 x 20				20		11.0-15.0		
RSH-SSA4-(LAC)-4.8 x 20-W						10.0-14.0		

Date generated: 13/02/2026

© FIXFAST Ltd 2026. All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. All rights reserved. Due to a policy of continuous development, FIXFAST reserves the right to change product specification and descriptions without notice. Subject to Fixfast's Terms & Conditions.