




FarBo® FloDrain - Plain Flange

Stainless steel flat roof drainage outlet with plain flange.

CERTIFICATIONS

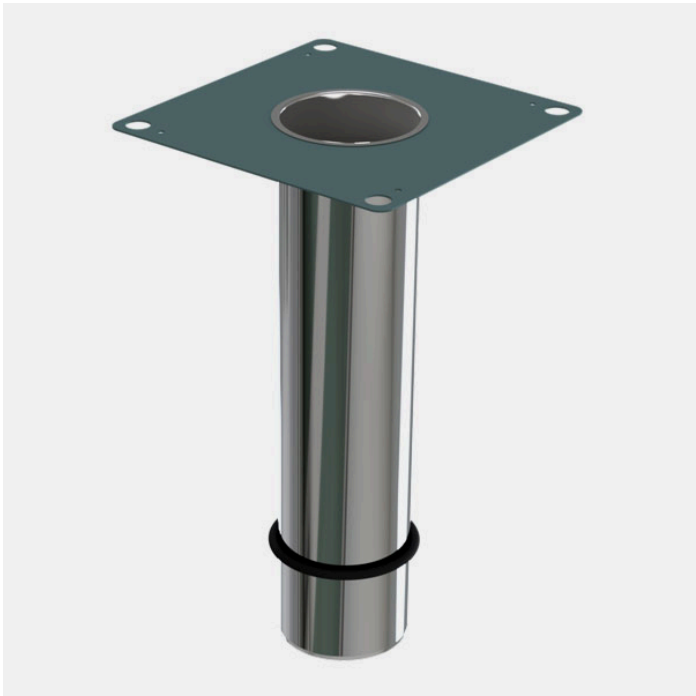

APPLICATIONS

Rainwater outlets for flat roof refurbishment and new build projects

KEY FEATURES

High quality 400mm long spigot manufactured from stainless steel

Flange is supplied plain stainless steel as standard, but can be primed if necessary - please enquire

FloDrain flange size - 300mm x 300mm square

O-ring seal supplied for refurbishment application - provides excellent seal whilst still allowing for movement

AVAILABLE VARIANTS

PRODUCT CODE	FLANGE MATERIAL	SPIGOT LENGTH	SPIGOT Ø	TO SUIT PIPE Ø (MM)	MEMBRANE FLANGE (MM)	FLOW RATE (UNIVERSAL LEAF GUARD) L/S	FLOW RATE (CASCADE LEAF GUARD) L/S
FO-FLO-50-PF	Plain Flange	400 mm	50 mm	58 - 64	300 x 300	0.9	1.7
FO-FLO-75-PF	Plain Flange	400 mm	75 mm	82 - 97	300 x 300	2.98	5
FO-FLO-95-PF	Plain Flange	400 mm	95 mm	102 - 109	300 x 300	3.36	6.68
FO-FLO-110-PF	Plain Flange	400 mm	110 mm	120 - 128	300 x 300	3.94	10.7