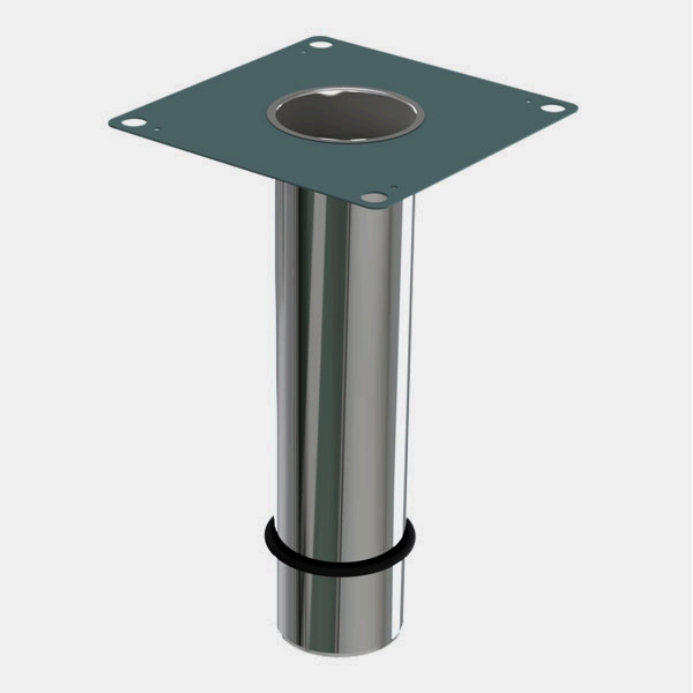

# FarBo® FloDrain - Plain Flange

Stainless steel flat roof drainage outlet with plain flange.

## CERTIFICATIONS

## APPLICATIONS

Rainwater outlets for flat roof refurbishment and new build projects

## KEY FEATURES

- High quality 400mm long spigot manufactured from stainless steel
- Flange is supplied plain stainless steel as standard, but can be primed if necessary - please enquire
- FloDrain flange size - 300mm x 300mm square
- O-ring seal supplied for refurbishment application - provides excellent seal whilst still allowing for movement

## AVAILABLE VARIANTS

| PRODUCT CODE | FLANGE MATERIAL | SPIGOT LENGTH | SPIGOT Ø | TO SUIT PIPE Ø (MM) | MEMBRANE FLANGE (MM) | FLOW RATE (UNIVERSAL LEAF GUARD) L/S | FLOW RATE (CASCADE LEAF GUARD) L/S |
|---|---|---|---|---|---|---|---|
| FO-FLO-50-PF | Plain Flange | 400 mm | 50 mm | 58 - 64 | 300 x 300 | 0.9 | 1.7 |
| FO-FLO-75-PF | Plain Flange | 400 mm | 75 mm | 82 - 97 | 300 x 300 | 2.98 | 5 |
| FO-FLO-95-PF | Plain Flange | 400 mm | 95 mm | 102 - 109 | 300 x 300 | 3.36 | 6.68 |
| FO-FLO-110-PF | Plain Flange | 400 mm | 110 mm | 120 - 128 | 300 x 300 | 3.94 | 10.7 |

© FIXFAST Ltd 2026. All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. All rights reserved. Due to a policy of continuous development, FIXFAST reserves the right to change product specification and descriptions without notice. Subject to Fixfast's Terms & Conditions. Generated: vertical_drains · 03 Oct 2026