


KONA Industrial Transceiver and Sensor

LoRaWAN® Battery-Powered Radio Transmitter

The KONA Industrial Transceiver and Sensor is an ideal solution for interfacing automation and control instrumentation to LoRaWAN® networks. The Industrial Transceiver and Sensor supports up to 3 Analog and Digital inputs enabling remote capture of data, 2 Switched Outputs to activate actuators and different control system components and a configurable RS-232, RS-422 or RS-485 interface with numerous protocols. It also measures and reports temperature and other custom features.

- Industrial process automation
- Irrigation Control
- Smart Building Control
- Manufacturing
- Smart Metering
- Smart Oil & Gas
- Mining
- M2M LoRaWAN Retrofitting

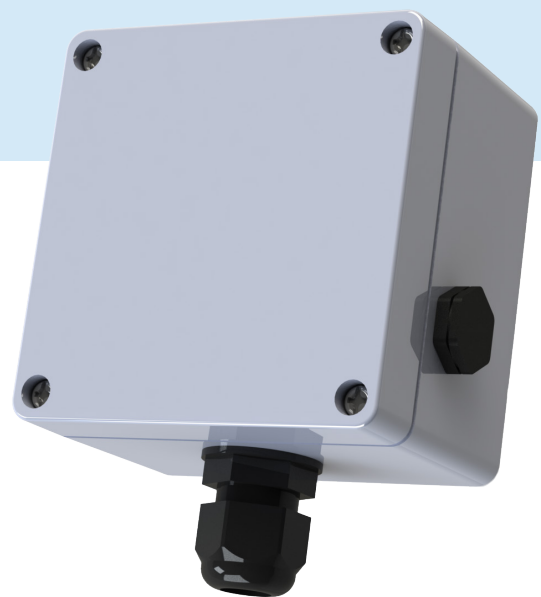

Technical and Functional System Specifications

General System Parameters

Operational Temperature	-40°C to +55°C
Operational Voltage	3.6V Nominal
Ingress Protection	IP67
Size	90 x 90 x 60 mm
Weight	50 g
Battery (up to 10 years)	Li-SOCl2

LoRa Parameters

RF Power	NA: 20dBm (100mW), EU: 14 dBm (25mW)
RF Sensitivity	up to -140dBm
ISM Band	NA915, EU868, AS923, JP920, CH779
Antenna	Internal Ceramic, UFL connector for External
LoRa Device Class	Class A and C (optional DC power)

Regulatory Compliance

Safety	IEC 60950-1, IEC 60950-22, IEC 62368-1
Environmental	ETSI EN 300 019-2-1, 300 019-2-2 ETSI EN 300 019-2-3, 300 019-2-4
Regulatory	FCC 15.247 RSS-247 FCC 15.209 RSS-Gen

Specifications subject to change without notice.

Applications

- » Industrial Process Automation
- » Precision Agriculture
- » Smart Building Control
- » Manufacturing
- » Smart Meters and Energy Grids
- » Automotive
- » M2M LoRaWAN Retrofit

KONA Industrial Transceiver and Sensor

LoRaWAN® Battery-Powered Radio Transmitter

Technical and Functional System Specifications

Battery Test Summary

- » A LoRa transmission with 11 bytes payload takes approximately 300 ms Tx time and 300 ms Rx time.
- » Considering the current draws with SX1262 when transmitting at max power (22 dBm), the result is less than 40 mAs battery usage.
- » The background current, when not transmitting or receiving, is less than 17 uA at cold temperatures.
- » **Estimated Capacity:**

Every 10 minutes transmitting 11 bytes ~ 290,000 transmissions = 5.5 years

Every 15 minutes transmitting 11 bytes ~ 260,000 transmissions = 7.5 years

Battery Voltage = 2 bytes
Temperature = 2 bytes
Input 1 (Digital) = 1 bytes
Input 1 Count = 2 bytes
Input 2 (Analog) = 2 bytes
Input 3 (Analog) = 2 bytes

Battery Test Parameters

Operational Temperature	20°C
Current Draw	80mA for 1 second
Tx Interval	Every 3 Seconds
Duty Cycle	33%

Battery Test Results

Number of Tx to Full Drain	900,000
Capacity	20aH

I/O and Interfaces

Input 1	60VDC binary
Input 2	4-20 mA current loop
Input 3	0-2.5V analog
Output 1	60VDC
Output 2	60V (isolated)
Serial Interface	RS-232 / 422 / 485
On Board Temperature Sensor	