

Wireless Air Pressure and Temperature Sensor

R720C Data Sheet

Wireless Sensor Network Based on LoRa Technology



Copyright©Netvox Technology Co., Ltd.

This document contains proprietary technical information which is the property of NETVOX Technology. It shall be maintained in strict confidence and shall not be disclosed to other parties, in whole or in part, without written permission of NETVOX Technology. The specifications are subject to change without prior notice.

Wireless Air Pressure and Temperature Sensor

Introduction

R720C is a wireless communication device that detects ambient air pressure and temperature.

R720C detects ambient air pressure and temperature and transmits the detected data to other devices via a wireless network for display. The device adopts the SX1276 wireless communication module.

Main Characteristic

- Apply SX1276 wireless communication module
- 2 ER14505 batteries AA SIZE (3.6V / section) in parallel
- Ambient air pressure, temperature
- The base is attached with a magnet that can be attached to a ferrous object
- Protection class IP65
- Compatible with LoRaWAN™ Class A
- Frequency hopping spread spectrum
- Configuration parameters can be configured via a third-party software platform, data can be read and alerts can be set via SMS text and email (optional)
- Applicable to the third-party platforms: Actility/ThingPark, TTN, MyDevices/Cayenne
- Low power consumption and long battery life

Note*:

Battery life is determined by the sensor reporting frequency and other variables.

Please refer to http://www.netvox.com.tw/electric/electric_calc.html.

On this website, users can find various types of batteries in different configurations.

Application

- Smart home
- Atmospheric Detection
- Other

Wireless Air Pressure and Temperature Sensor

Dimension

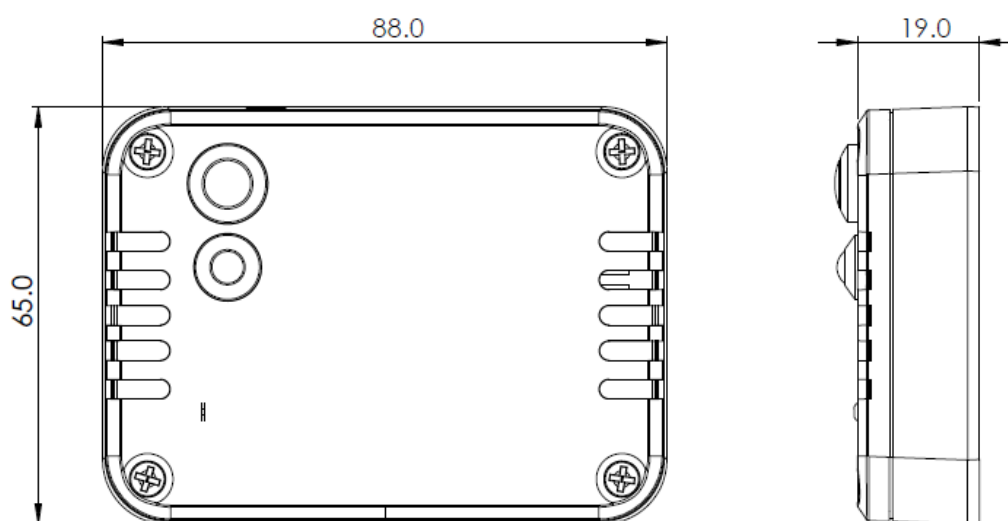


Fig. 1 Host Body Dimension: 88mm x 65mm x 19mm

Electric

Power Supply	2 sections ER14505 lithium batteries (3.6V, 2400mAh/ section) in parallel
Battery Lifetime	Battery lifetime 5 years (Condition: ambient temperature 25°C, report once every 15min, TX power = 20dBm, LoRa spreading factor SF = 10)
Standby Current	24uA
Wake-up Current	6.3mA@3.3V
Low Voltage Threshold	3.2V
RF Receiving Current	11mA @3.3V
RF Transmitting Current	120mA @3.3V

* Specific electrical characteristics may vary depending on the power supply voltage.

Wireless Air Pressure and Temperature Sensor

HP303B Pressure Sensor

Model	HP303B
Power Supply	+3.3VDC
Air Pressure Measurement Range	300-1100hPa
Air Pressure Measurement Accuracy	±1.5hPa (950~1050 hPa, 0~40 °C)
Temperature Measurement Range	-40°C~55°C
Temperature Measurement Accuracy	±1°C @25°C

Frequency

Frequency Range	863MHz-928MHz 470MHz-510MHz
TX Power	US915 20dbm AS923 16dbm AU915 20dbm CN470 19.15dbm EU868 16dbm KR920 14dbm IN865 20dbm
Receive Sensitivity	-136dBm (LoRa, Spreading Factor=12, Bit Rate=293bps) -121dBm (FSK, Frequency deviation=5kHz, Bit Rate=1.2kbps)
Antenna Type	Built-in antenna
Communication Distance	10km (visible linear obstacle-free transmission distance, actual transmission distance depending on the environment)
Data Transfer Rate	0.3kbps~50kbps
Modulation Method	LoRa/FSK (Note: choose one of them)
Supportable LoRaWAN Band	EU863-870, US902-928, AU915-928, KR920-923, AS923, CN470-510 (Note: The frequency band is optional and needs to be configured before shipment)

Wireless Air Pressure and Temperature Sensor

Physical

Dimension	L 88mm* W 65mm* H 19mm
Host Body Weight	About 113g
Ambient Temperature Range	-40°C ~ 55°C
Storage Temperature Range	<90%RH (No condensation)
Ambient Humidity Range	-40°C ~ 85°C