
INSTALLATION GUIDE

CIRILLA-TT

Wall Cabinet

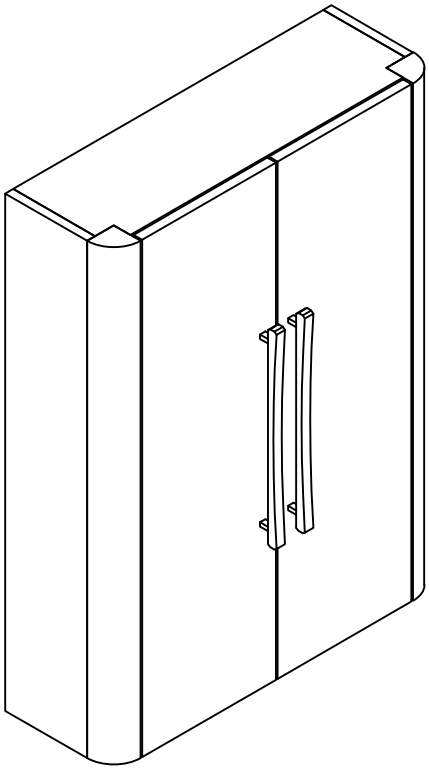

CIRILLA-TT


Wall Cabinet Installation Guide

Read all instructions before installation.
Keep this guide for future reference.

Thank You for Choosing Water Creation

Thank you for choosing Water Creation. Please read this guide carefully before installing your CIRILLA-TT wall cabinet. For product support, contact the retailer where you purchased the product.

Tools and Materials

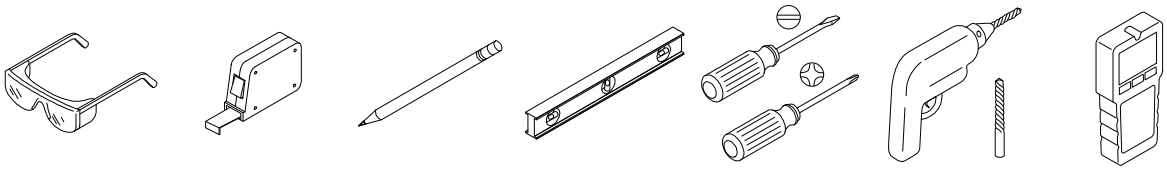

Stud Finder

Also required:
- 2 x 4 lumber
- Framing lumber and fasteners
- Drywall and drywall tools


Before You Begin


CAUTION: Risk of electric shock. Electrical wiring may need to be relocated. Use caution to avoid an electric shock.

CAUTION: Risk of product damage. Do not leave the door supported by only one hinge during removal or installation. Release the bottom hinge first when removing the door, and attach the top hinge first when installing it.

Follow all local plumbing and building codes.
Your product may differ from the illustrations. The installation procedure is the same.
Two people should perform this installation.

1. Prepare the Site

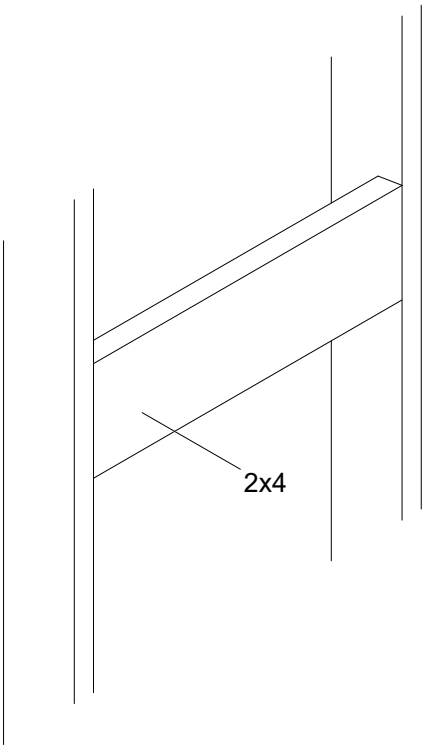


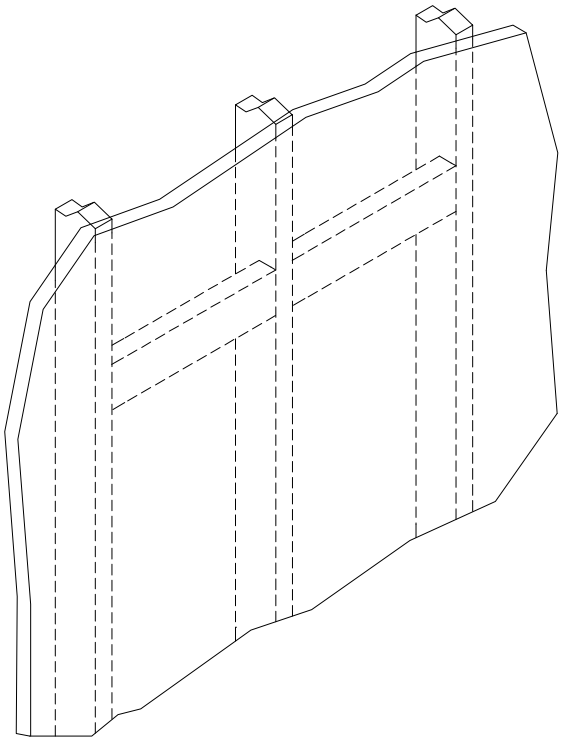



NOTE: Backing is not required if at least two wall studs are located behind the cabinet.

- Install 2 x 4 backing boards between the wall studs at the desired cabinet location. Typically, two boards are needed to span the width of the cabinet.
- Finish the wall.

2. Install the Hangers

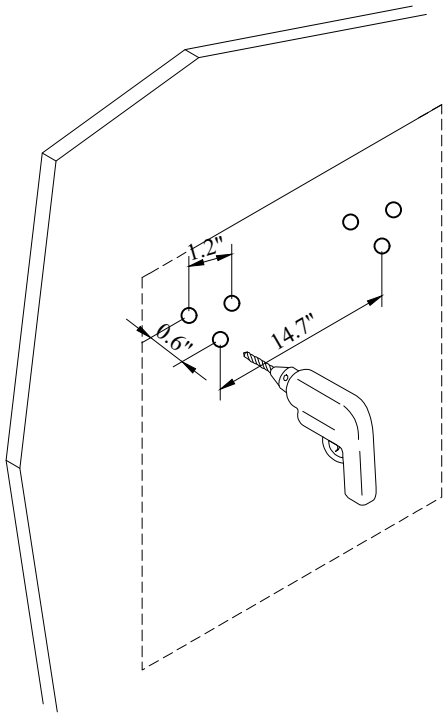


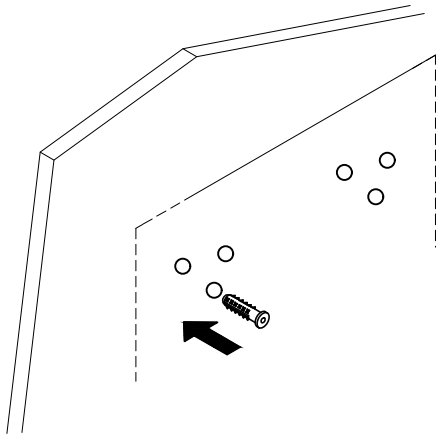


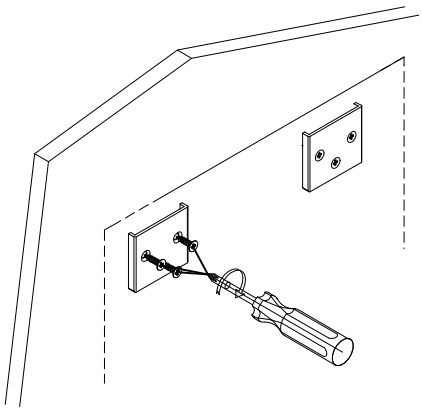

- With assistance, lift the cabinet and place it against the finished wall.
- Ensure the cabinet is level, then mark its top edge and centerline.
- Carefully set the cabinet aside on a padded surface.
- Drill six Ø8 mm holes in the positions shown in the illustration.
- Insert the anchors into the holes. Secure the hanger brackets with screws.


3. Secure the Cabinet

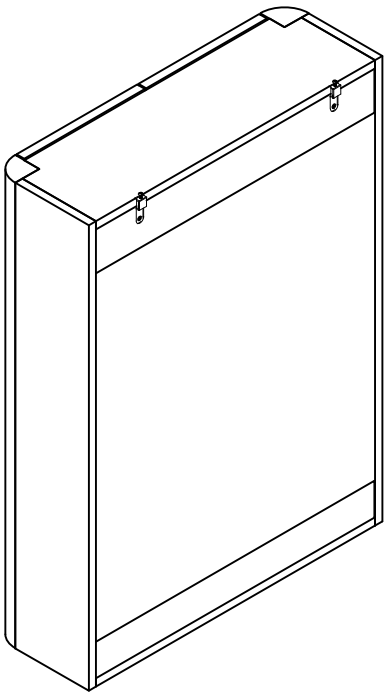


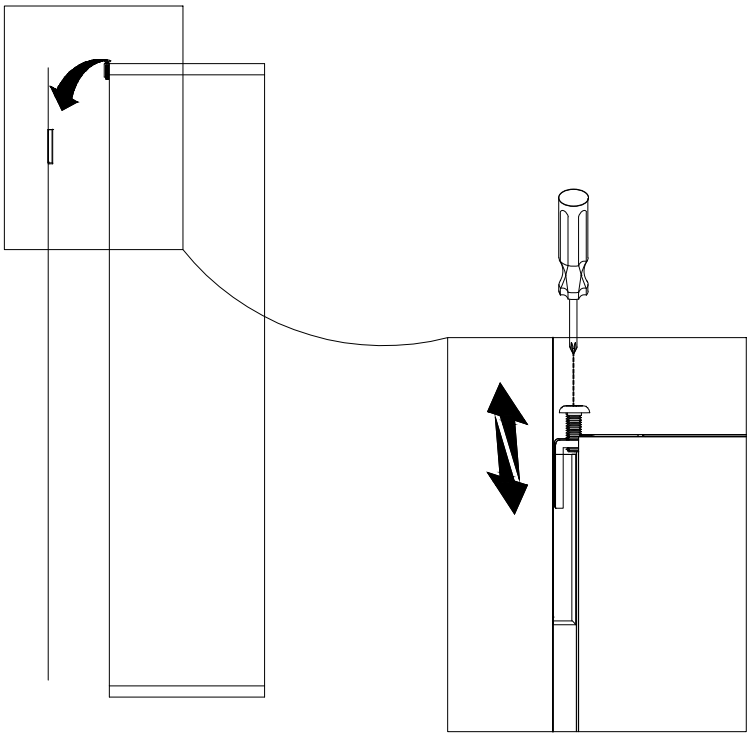

- With assistance, lift the wall cabinet into position and engage the hangers.
- Use a screwdriver to adjust the hangers until the cabinet is level.


4. Adjust the Shelves

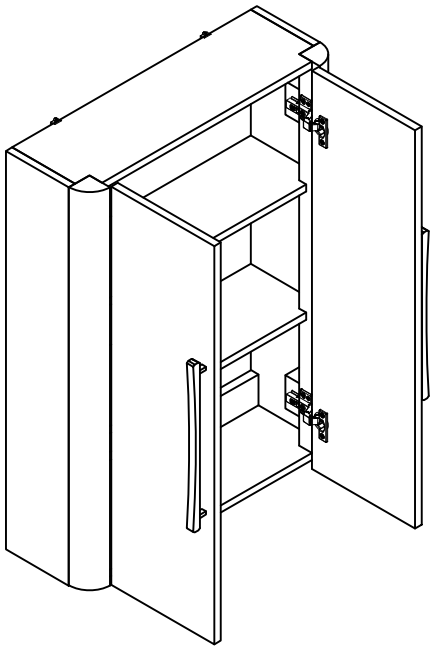

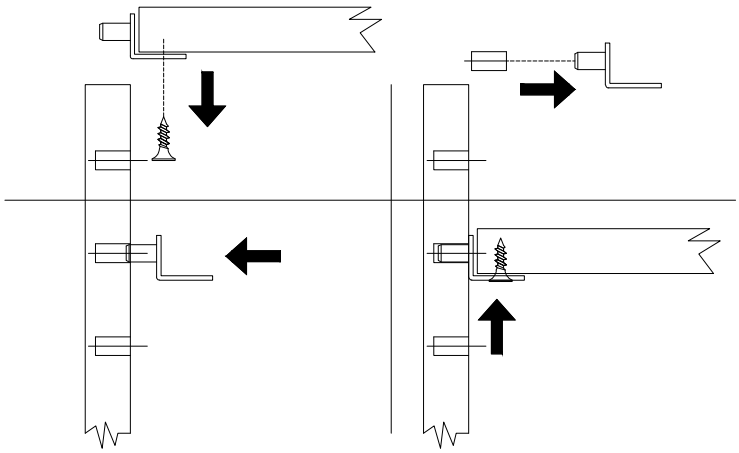

- Remove the screws securing the shelf to the shelf pins.
- Remove the shelf from the wall cabinet.
- Insert the shelf pins into the desired holes. Make sure all pins are level.
- Gently place the shelf in the cabinet and secure it to the shelf pins with the shelf screws.

5. Remove and Adjust the Door

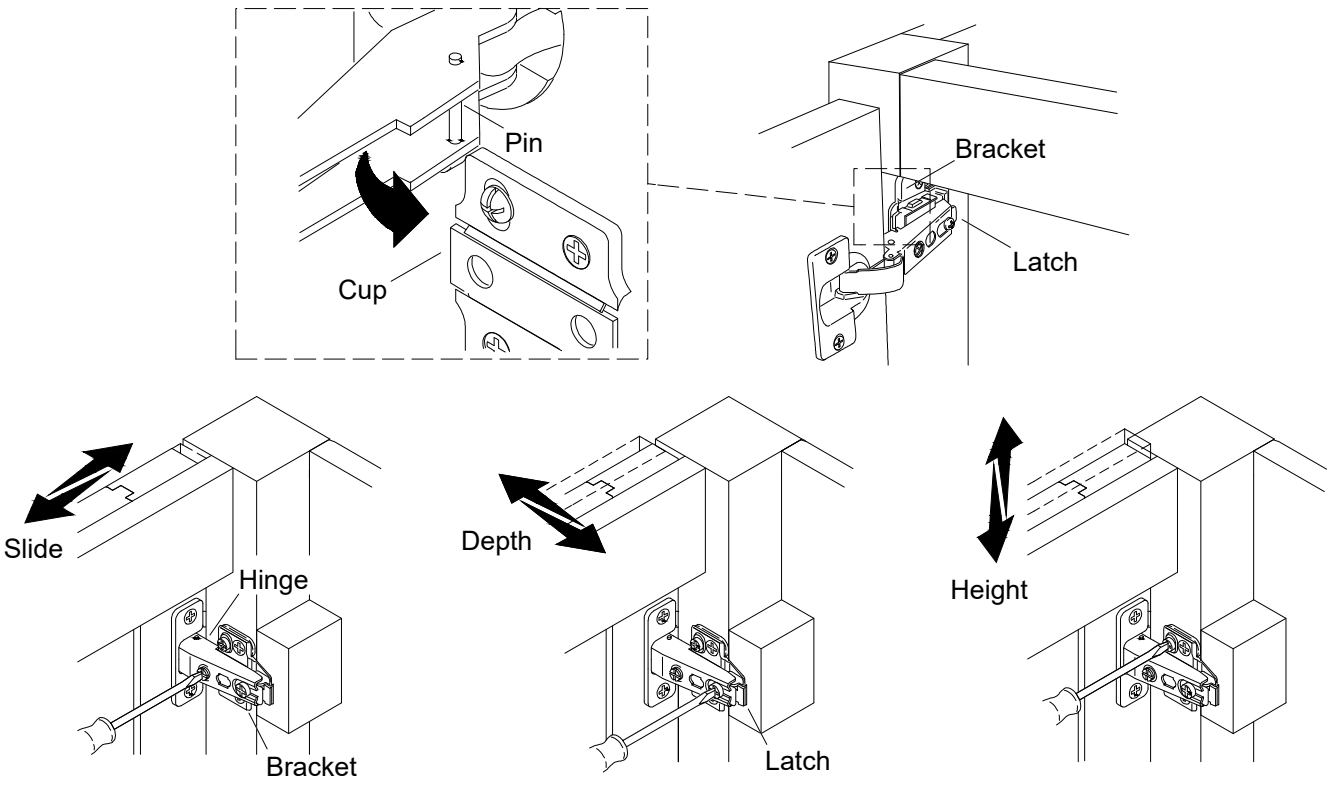

CAUTION: Risk of product damage. Do not leave the door supported by only one hinge. Release the bottom hinge first during removal, and attach the top hinge first during installation.

Door Adjustment

- Adjust the hinges as needed for proper door operation and alignment.
- Refer to the illustration for the screwdriver position for each adjustment.

Door Removal


- Support the door with one hand and keep it fully open.
- With your other hand, release the lower hinge latch from the bracket.
- Repeat for the upper hinge.
- Move the door forward to slide the hinges off the brackets.

Door Installation

NOTE: Have another person support the door during installation.

- Align the pin with the top hinge cup.
- Snap the latch onto the top bracket.
- Repeat for the lower hinge.

Product Dimensions

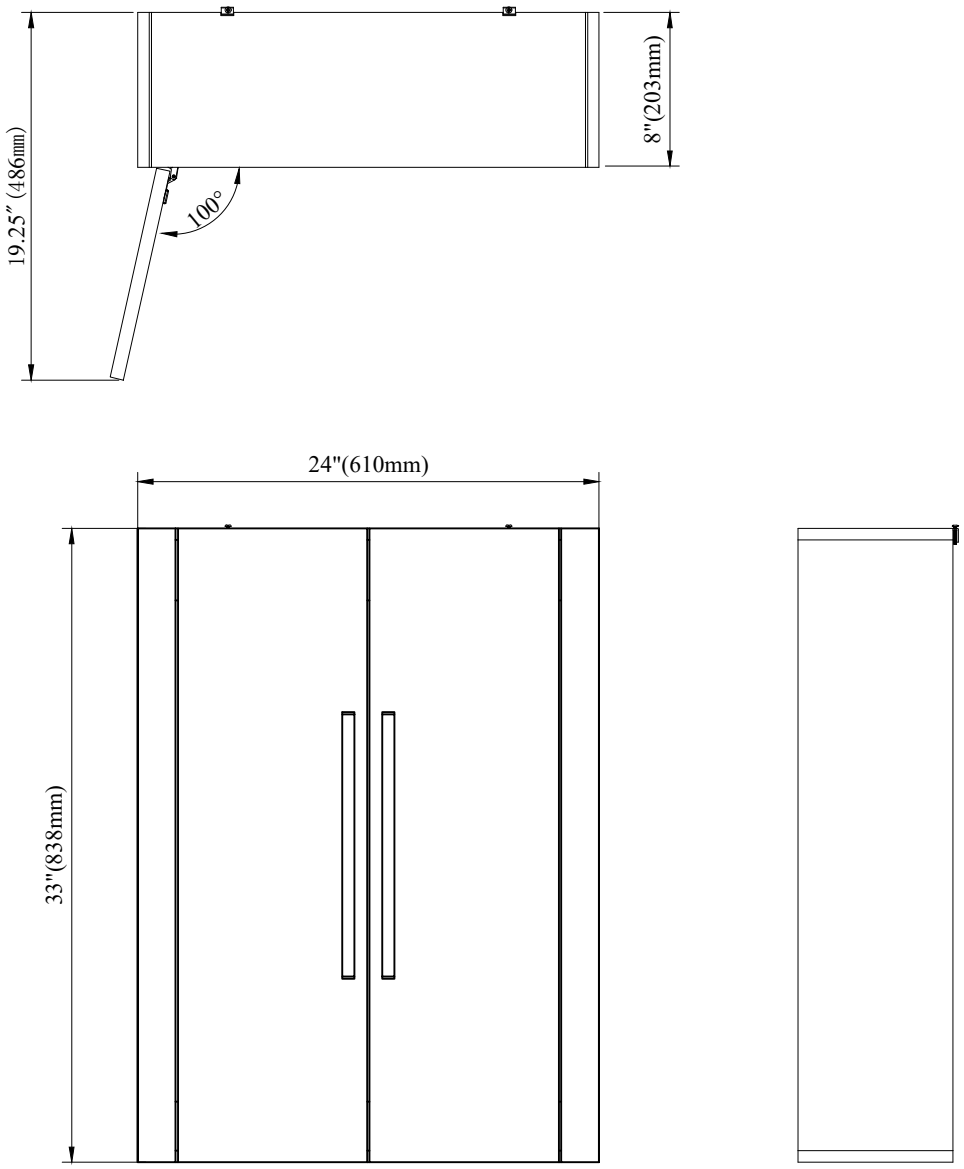

Technical Information

All product dimensions are nominal.

Installation Note

Install this product according to the instructions in this guide.

Handle Installation Reference

