















LOFT MF20

Frame Dimensions 1.58 x 0.87 inch 0.16 + 0.16 inch **Glazing Application** Top Carrier Rail Dimensions

1.97 + 1.58 inch x 2.28 inch Guide Type Recessed rail in the ground Integrated Work I

Max. Sash Dimensions 27.56 x 98.43 inch Max. Sash Weight

88.19 lbs

TECHNICAL PROPERTIES

LOFT OP30

1.58 x 1.18 inch Frame Dimensions 0.16 + 0.16 inch **Glazing Application** Integrated Work I

Integrated Work II **Decorative Grid Application**

TECHNICAL PROPERTIES

LOFT MS20

1.58 x 0.79 inch Frame Dimensions 0.16 + 0.16 inch **Glazing Application** Top Carrier Rail Dimensions 1.97 + 1.58 inch x 1.42 inch Guide Type Leveling piece on the ground Integrated Work II

Max. Sash Dimensions 47.25 x 98.43 inch Max. Sash Weight 154.33 lbs

TECHNICAL PROPERTIES

OP26 STEELLOK

1.77 inch Door Frame Depth 0.32 inch **Glazing Application** 23.62 x 59.06 inch **Glazing Width** Glazing Height 78.74 x 118.11 inch Sound Insulation 52 dB







GLASS GROUP LLC
+1 (571) 269-2061
info@glassgroup.us
1 County Rd. Suite A12, Secaucus, NJ 07094









Spaces are easily illuminated, more energy efficient and more comfortable to work in. It offers unique design possibilities for modern offices. It is very robust for floor to ceiling structures. It allows you to easily solve complex typologies in T and Plus shape and gives the feeling of steel appearance.












OP30

MS20 Sliding

OP26 Steellok

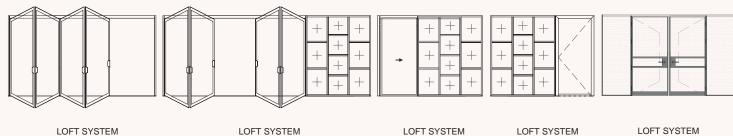

LOFT SYSTEM LOFT SYSTEM MF20 / OP30 MS20 / OP30

LOFT SYSTEM

LOFT SYSTEM OP26 STEELLOK



