

CS35T Thermo Sliding System



TECHNICAL PROPERTIES

Frame Depth	3.23 - 6.3 inch
Sash Depth	1.54 inch
Interlocking Depth	3.5 inch
Profile Wall Thickness	0.05 - 0.06 inch
Thermal Break	0.71 - 0.95 inch
Glazing Thickness	0.79 inch
Max. Sash Dimensions	62.99 x 110.24 inch
Max. Sash Weight	352.74 lbs

PERFORMANCE VALUES

Min. Thermal Insulation	Uf: 5,49 - 6,24 W/(m².K)
-------------------------	--------------------------

APPLICATION OPTIONS


Sash Connection of 90°	-
Sash Connection of 45°	+
Sash With Glazing Bead	-
Sash Without Glazing Bead	+
Insect Screen Application	+

CS35T Thermo Sliding System



CS35T is a sliding system that provides spacious environments. It provides comfort with fast moving sashes thanks to its superior carrying capacity.

CS35T

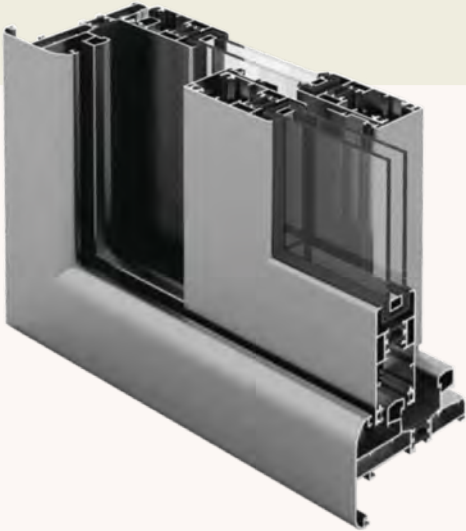

Sliding System

glassgroup.us



GLASS GROUP LLC
+1 (571) 269-2061
info@glassgroup.us
1 County Rd. Suite A12, Secaucus, NJ 07094

Trusted Solution Partner
www.akpaas.com.tr



glassgroup.us

CS35T Thermo Sliding System

