




Outdoor Column Speaker

NT-810+815+825+835+845 OCS

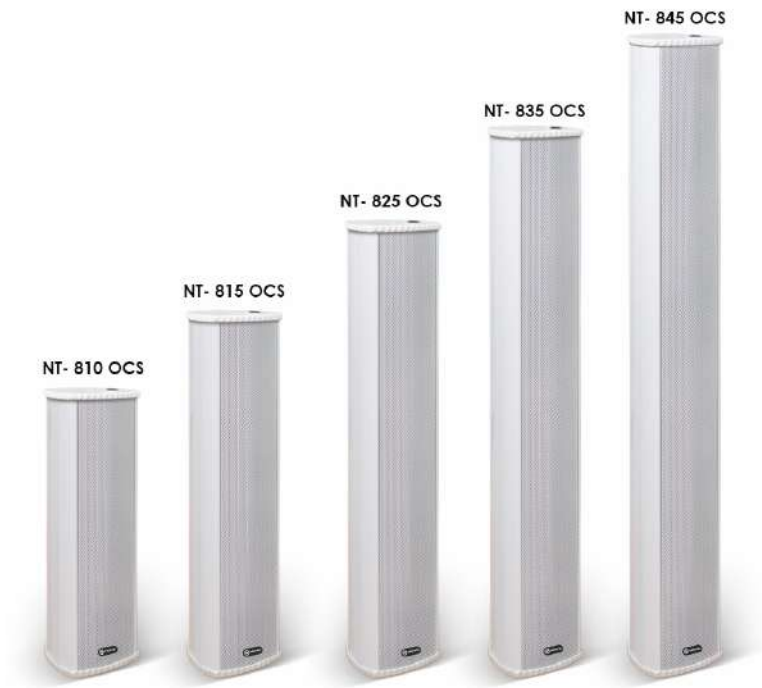

Dimensions

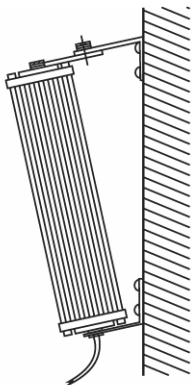

Installation diagram

Outdoor Column Speaker (NT-810+815+825+835+845 OCS)

This professional-grade lineup offers five scalable models for outdoor sound reinforcement, featuring durable aluminum construction and progressive power options from 10W to 45W. All models share a consistent 3"+HF driver configuration and maintain 92dB sensitivity across the series, with frequency responses ranging from 160Hz-13kHz (NT-810) up to 160Hz-15kHz (NT-835/845). The column-style design varies in height from compact 285mm (NT-810, 1.34kg) to substantial 880mm (NT-845, 4kg), all with uniform 107x105mm width for seamless visual integration. With 70V-100V line voltage compatibility and IP-rated aluminum enclosures (specific rating not stated), these speakers are engineered for reliable performance in parks, campuses, transportation hubs, and other outdoor environments requiring weather-resistant, low-maintenance audio solutions. The graduated power options allow precise system scaling from background music (10W) to area-wide coverage (45W) while maintaining consistent tonal quality.

TECHNICAL DATA SPECIFICATION

Model	NT-810 OCS	NT-815 OCS	NT-825 OCS	NT-835 OCS	NT-845 OCS
Drive:	3"/H:2"	3"/ H:2"	3"/ H:2"	3"/ H:2"	3"/ H:2"
Rated Power:	10W	15W	25W	35W	45W
Line voltage:	70V-100V	70V-100V	70V-100V	70V-100V	70V-100V
Sensitivity:	92dB	92dB	92dB	92dB	92dB
Frequency Response:	160-13KHz	160-14KHz	160-14KHz	160-15KHz	160-15KHz
Dimension (mm):	107x105x285	107x105x395	107x105x590	107x105x730	107x105x880
Material:	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Weight (kg):	1.34	1.94	2.7	3.48	4

KEY FEATURES

Nova's NT outdoor column speakers (10W-45W) feature aluminum construction, 3"+HF drivers, and 92dB sensitivity with 160Hz-15kHz response. Available in 285-880mm heights (1.34-4kg), these 70V/100V-compatible speakers provide durable, scalable audio for outdoor applications.

