


PA Amplifier

NT - 60BPA

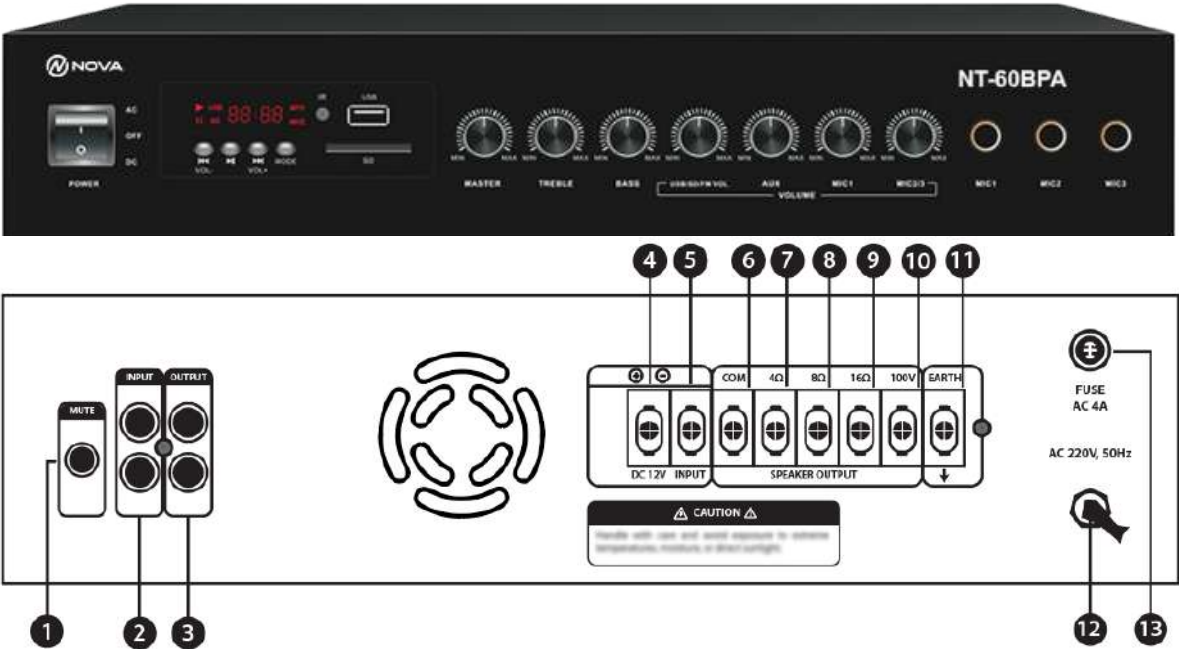

PA Amplifier

The NT-60BPA is a multifunctional audio device supporting U disk, SD card, radio, and Bluetooth playback. It features three microphone inputs, one AUX input, and one AUX output, making it versatile for various audio setups. With constant voltage outputs of 100V and 70V, and 4-16 ohm resistance output, it is compatible with a wide range of speakers. Safety features include short circuit, overheating, and distortion protection. It can be powered by AC (220V) or DC (12V), offering flexibility for different environments. Ideal for public address systems and personal use.

TECHNICAL DATA SPECIFICATION

Model	NT-60BPA
Line Voltage:	70-100 v
Impedance:	4-16 Ω
Rated Power:	100 W
Zone:	/
Dimension:	360x265x65
Weight:	5.4 KG
Gross Weight:	6.3 KG
Panel Color:	Black

KEY FEATURES

The PAD-80 supports U disk, SD card, radio, and Bluetooth playback, with multiple inputs (3 mic, 1 AUX) and outputs (1 AUX, 100V/70V, 4-16 ohm). It includes safety features like short circuit, overheating, and distortion protection, and can be powered by AC (220V) or DC (12V), making it suitable for various audio applications.

QUICK GUIDE

To use the PAD-80: Insert USB/SD for playback, connect mics (3 inputs) or AUX, choose between 100V/70V or 4-16 Ω speaker outputs, power via 220V AC or 12V DC, and utilize Bluetooth/radio functions while benefiting from built-in overload and thermal protection.

